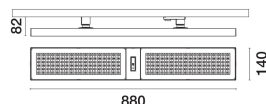


Last information update: April 2025

**Product configuration: PY94.S1**

PY94.S1: Luminaire L=880 - DALI-2 Sensor - Very Wide Flood (Down) optic - UGR<19 - 33.5W 4959lm - 4000K - CRI 90 - White/White/White Transparent

**Product code**

PY94.S1: Luminaire L=880 - DALI-2 Sensor - Very Wide Flood (Down) optic - UGR<19 - 33.5W 4959lm - 4000K - CRI 90 - White/White/White Transparent

**Technical description**

Luminaire made of painted extruded aluminium, frame and caps made of injection-moulded thermoplastic. Very Wide Flood optic (80°) in a Space Opti-Diamond (PMMA) version with a rear cover available in a White (Transparent White) or Black (Transparent Black) version. Integrated DALI-2 power supply and 4000K CRI90 direct emission monochrome LED lamp (Mid-Power). Version with UGR < 19 controlled luminance - in compliance with the standard for use in environments with video monitors ( $L \leq 3000 \text{ cd/m}^2$ ). Luminaire complete with DALI-2 sensor and light and motion detector, for compatible DALI-2 control systems.

**Installation**

Mounted on mains voltage tracks.

Positioning height min 2.4 m / max 5 m for motion and min 2.4 m / max 3 m as a light and motion sensor.

For other height positioning values and distances between luminaires, contact iGuzzini or refer to the instruction sheets.

Example of typical motion sensor coverage diameter: 5 m (@ 4 m h for installation).

Dynamic lighting range: 1-1000 lx.

Movement detection angle 84°.

Detection angle for light measurement 30° - 60° (asymmetric).

**Colour**

White/White/White Transparent (S1)

**Weight (Kg)**

2.73

**Wiring**

Power supply via DALI bus (consumption 9 mA).

**Notes**

DALI EN 62386-101 ed.2 (DALI-2) The sensor used is DALI-2 certified. DALI parts 101,103,301,303,304


For systems compatible with the DALI-2 sensor, contact iGuzzini.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	4959	Lamp code:	LED
W system:	31	Number of lamps for optical assembly:	1
Im source:	5700	ZVEI Code:	LED
W source:	31	Number of optical assemblies:	1
Luminous efficiency (Im/W, real value):	160	Power factor:	See installation instructions
Im in emergency mode:	-	Inrush current:	10 A / - $\mu$ s
Total light flux at or above an angle of 90° [Lm]:	0	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 12 luminaires B16A: 20 luminaires C10A: 20 luminaires C16A: 34 luminaires
Light Output Ratio (L.O.R.) [%]:	87	Minimum dimming %:	1
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	4000	Control:	DALI-2 sensor
MacAdam Step:	3		

# Polar

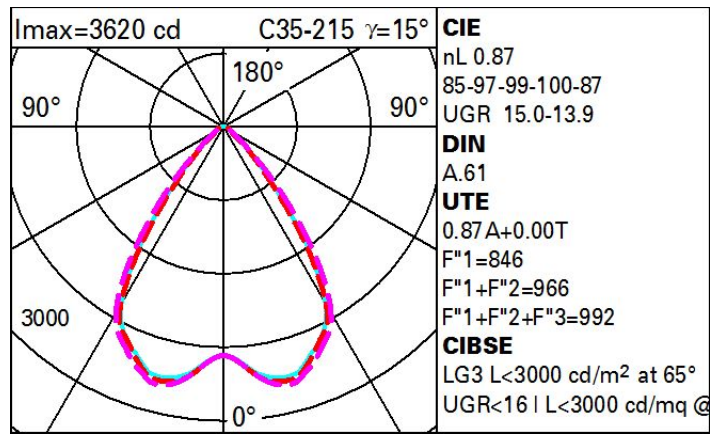

# UGR diagram

Corrected UGR values (at 5700 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	14.9	15.6	15.2	15.9	16.1	14.0	14.7	14.3	15.0	15.2	
	3H	15.0	15.7	15.3	16.0	16.2	13.9	14.6	14.2	14.9	15.2	
	4H	15.0	15.7	15.4	16.0	16.3	13.9	14.5	14.2	14.8	15.1	
	6H	15.1	15.6	15.4	16.0	16.3	13.8	14.4	14.1	14.7	15.0	
	8H	15.1	15.6	15.4	16.0	16.3	13.8	14.3	14.1	14.7	15.0	
	12H	15.0	15.6	15.4	15.9	16.3	13.7	14.3	14.1	14.6	15.0	
4H	2H	14.7	15.4	15.1	15.7	16.0	14.0	14.7	14.4	15.0	15.3	
	3H	14.9	15.4	15.3	15.8	16.1	14.0	14.6	14.4	14.9	15.3	
	4H	15.0	15.5	15.4	15.8	16.2	14.0	14.5	14.4	14.8	15.2	
	6H	15.0	15.4	15.5	15.8	16.3	13.9	14.4	14.4	14.8	15.2	
	8H	15.0	15.4	15.5	15.8	16.3	13.9	14.3	14.4	14.7	15.2	
	12H	15.0	15.4	15.5	15.8	16.3	13.9	14.2	14.3	14.7	15.1	
8H	4H	14.9	15.3	15.3	15.7	16.1	14.0	14.4	14.4	14.8	15.2	
	6H	15.0	15.3	15.4	15.7	16.2	14.0	14.3	14.5	14.8	15.2	
	8H	15.0	15.3	15.5	15.7	16.2	14.0	14.3	14.5	14.7	15.2	
	12H	15.0	15.2	15.5	15.7	16.2	14.0	14.2	14.5	14.7	15.2	
12H	4H	14.9	15.2	15.3	15.6	16.1	14.0	14.3	14.4	14.8	15.2	
	6H	14.9	15.2	15.4	15.7	16.2	14.0	14.2	14.5	14.7	15.2	
	8H	15.0	15.2	15.5	15.7	16.2	14.0	14.2	14.5	14.7	15.2	
Variations with the observer position at spacing:												
S =		1.0H	2.7 / -3.8		3.0 / -4.4							
		1.5H	5.2 / -4.3		5.2 / -4.9							
		2.0H	7.1 / -4.9		7.1 / -5.2							