


Last information update: March 2025

**Product configuration: PY50**

PY50: Ø122mm body - BLE Casambi - Flood optic



**Product code**

PY50: Ø122mm body - BLE Casambi - Flood optic

**Technical description**

Adjustable spotlight with adapter for installation on an electrified track or base. High chromatic yield LED lamp with 3500K tone and OptiBeam Lens optic system and Flood optic. Luminaire made of die-cast aluminium and thermoplastic material that allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane with mechanical aiming locks. Passive heat dissipation. Spotlight with "Push&Go" system designed to hold up to three flat accessories at the same time. The same system can also be used to apply another external component selected from the directional flaps and anti-glare screen. All internal accessories rotate 360° about the spotlight longitudinal axis. Body complete with dimmable power supply unit and Casambi protocol. The components used allow the products to be controlled with the Casambi system app and components, enabling on-off, dimming and scene recall functions and allowing multiple luminaires to operate in a Casambi mesh network. 2.4 GHz bluetooth frequency. The app is available on the Apple Store and Google Play Store. Integrated Beacon that can be activated via an app (iBeacon) that enables smart functions for third party applications and the Jiminy Push Notification app.

**Installation**

Installation on an electrified track or base.

**Colour**

White (01) | Black (04)

**Weight (Kg)**

2.13

**Mounting**

wall surface|ceiling surface

**Wiring**


Electronic components integrated in product

**Notes**

Max distance between products 8 m.

The maximum distance is affected by physical obstacles, like walls, metal panels and the layout of the system.


Complies with EN60598-1 and pertinent regulations




**Technical data**

lm system:	2558	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	29.3	Lamp code:	LED
lm source:	3280	Number of lamps for optical assembly:	1
W source:	26	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	87.3	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	20 A / 25 µs
Light Output Ratio (L.O.R.) [%]:	78	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 34 luminaires B16A: 55 luminaires C10A: 57 luminaires C16A: 93 luminaires
Beam angle [°]:	29°	Minimum dimming %:	1
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3500	Control:	Casambi
MacAdam Step:	2		

**Polar**

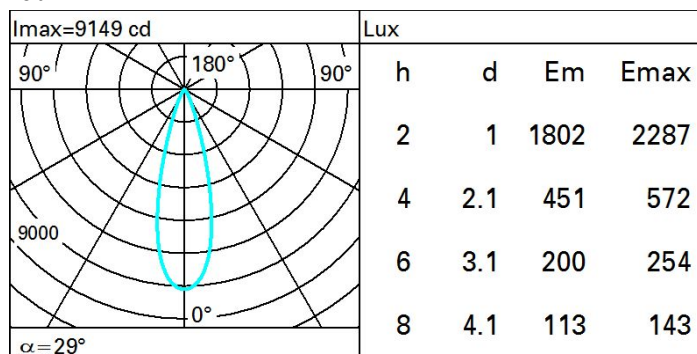

### Isolux

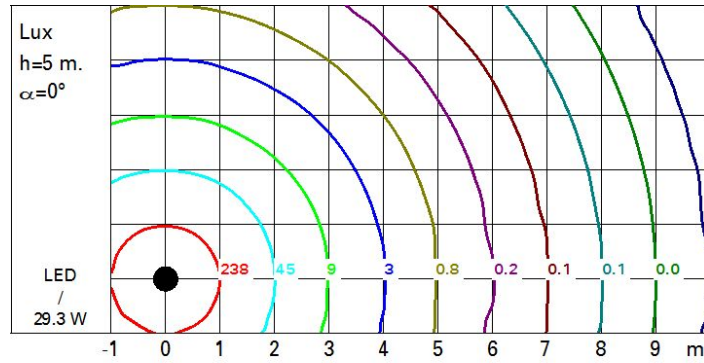

### UGR diagram

Corrected UGR values (at 3280 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav											
walls											
work pl.											
Room dim											
x y		viewed crosswise					viewed endwise				
2H	2H	10.8	12.8	11.1	13.1	13.4	10.8	12.8	11.1	13.1	13.4
	3H	10.6	12.2	11.0	12.5	12.9	10.6	12.2	11.0	12.5	12.9
	4H	10.6	11.9	10.9	12.2	12.6	10.6	11.9	10.9	12.2	12.6
	6H	10.5	11.6	10.9	11.9	12.3	10.5	11.6	10.9	11.9	12.3
	8H	10.5	11.5	10.9	11.9	12.2	10.5	11.5	10.9	11.9	12.2
	12H	10.4	11.4	10.8	11.8	12.2	10.4	11.5	10.8	11.8	12.2
4H	2H	10.6	11.9	10.9	12.2	12.6	10.6	11.9	10.9	12.2	12.6
	3H	10.5	11.5	10.9	11.9	12.2	10.5	11.5	10.9	11.9	12.2
	4H	10.4	11.3	10.8	11.7	12.1	10.4	11.3	10.8	11.7	12.1
	6H	10.0	11.6	10.5	12.0	12.5	10.0	11.6	10.5	12.0	12.5
	8H	9.9	11.7	10.4	12.1	12.6	9.9	11.7	10.4	12.1	12.6
	12H	9.8	11.6	10.3	12.1	12.6	9.8	11.7	10.3	12.1	12.6
8H	4H	9.9	11.7	10.4	12.1	12.6	9.9	11.7	10.4	12.1	12.6
	6H	9.8	11.5	10.3	12.0	12.5	9.8	11.5	10.3	12.0	12.5
	8H	9.7	11.3	10.3	11.8	12.3	9.7	11.3	10.3	11.8	12.3
	12H	9.9	10.9	10.4	11.4	12.0	9.9	10.9	10.4	11.4	12.0
12H	4H	9.8	11.7	10.3	12.1	12.6	9.8	11.6	10.3	12.1	12.6
	6H	9.7	11.3	10.3	11.8	12.3	9.7	11.3	10.3	11.8	12.3
	8H	9.9	10.9	10.4	11.4	12.0	9.9	10.9	10.4	11.4	12.0
Variations with the observer position at spacing:											
S =	1.0H	4.1 / -7.9					4.1 / -7.9				
	1.5H	6.8 / -10.3					6.8 / -10.3				
	2.0H	8.8 / -12.4					8.8 / -12.4				