

## Laser Blade



Design iGuzzini

iGuzzini

Last information update: March 2025

**Product configuration: EK62.83**

EK62.83: 5 - cell Recessed luminaire - LED Neutral white - Incorporated DALI dimmable power supply - Wide Flood optic - 12.7W  
1275lm - 4000K - Black Transparent

**Product code**

Product Code  
EK62.83: 5 - cell Recessed luminaire - LED Neutral white - Incorporated DALI dimmable power supply - Wide Flood optic - 12.7W  
1275lm - 4000K - Black Transparent

### Technical description

rectangular miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - wide flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Supplied with DALI dimmable electronic control gear connected to the luminaire. High efficiency value Neutral White LED (lm/W).

## Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

**Colour**  
Black Transparent (83)

Weight (Kg)  
0.3

## Mounting

meaning  
wall recessed|ceiling recessed

## Wiring

on control gear box: screw connections with terminal block included


Complies with EN60598-1 and pertinent regulations



## Technical data

Im system:	1215	CRI (typical):	82
W system:	12.7	Colour temperature [K]:	4000
Im source:	1500	MacAdam Step:	3
W source:	9.9	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	95.7	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	48° / 46°	Control:	DALI-2
CRI (minimum):	80		


## Polar

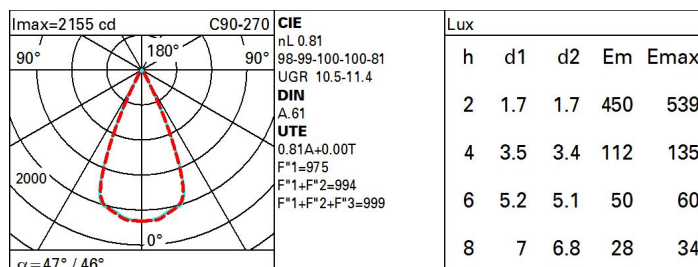

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	68	65	65	62	77
1.0	76	72	69	68	71	69	69	66	81
1.5	80	77	75	73	76	74	73	71	87
2.0	82	80	79	77	79	78	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	82	81	79	97
4.0	86	85	84	84	84	83	82	80	99
5.0	86	86	85	85	84	84	83	81	100

# Luminance curve limit

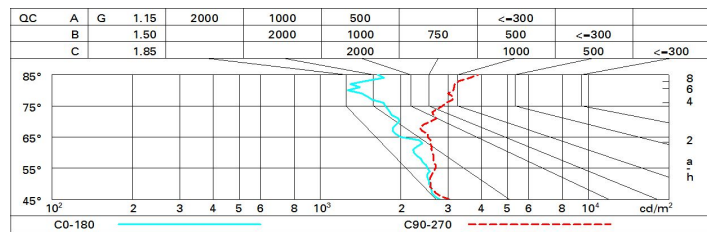

# UGR diagram

Corrected UGR values (at 1500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	10.0	10.5	10.2	10.7	10.9	10.5	11.0	10.8	11.3	11.5
	3H	10.1	10.5	10.4	10.8	11.1	10.6	11.0	10.9	11.3	11.6
	4H	10.1	10.6	10.5	10.8	11.1	10.6	11.0	10.9	11.3	11.6
	6H	10.2	10.5	10.5	10.9	11.2	10.5	10.9	10.9	11.2	11.5
	8H	10.1	10.5	10.5	10.9	11.2	10.5	10.9	10.8	11.2	11.5
	12H	10.1	10.5	10.5	10.8	11.2	10.5	10.8	10.8	11.2	11.5
4H	2H	10.0	10.5	10.4	10.7	11.0	11.0	11.4	11.3	11.7	12.0
	3H	10.3	10.6	10.6	11.0	11.3	11.2	11.6	11.6	11.9	12.3
	4H	10.4	10.7	10.8	11.1	11.5	11.3	11.7	11.7	12.0	12.4
	6H	10.5	10.7	10.9	11.1	11.6	11.4	11.7	11.8	12.0	12.5
	8H	10.5	10.7	10.9	11.1	11.6	11.4	11.6	11.8	12.0	12.5
	12H	10.5	10.7	10.9	11.1	11.6	11.3	11.6	11.8	12.0	12.4
8H	4H	10.4	10.7	10.9	11.1	11.6	11.8	12.1	12.2	12.5	12.9
	6H	10.6	10.8	11.0	11.2	11.7	12.0	12.2	12.4	12.6	13.1
	8H	10.6	10.8	11.1	11.3	11.7	12.0	12.2	12.5	12.7	13.2
	12H	10.6	10.8	11.1	11.3	11.8	12.0	12.2	12.5	12.7	13.2
12H	4H	10.4	10.7	10.9	11.1	11.6	11.9	12.2	12.4	12.6	13.1
	6H	10.6	10.8	11.1	11.2	11.7	12.2	12.4	12.7	12.8	13.3
	8H	10.6	10.8	11.1	11.3	11.8	12.3	12.4	12.8	12.9	13.4
Variations with the observer position at spacing:											
S =	1.0H	2.8 / -2.7					1.7 / -1.8				
	1.5H	4.7 / -3.1					3.2 / -2.0				
	2.0H	6.5 / -3.8					4.8 / -2.5				