

Laser Blade


Design iGuzzini

iGuzzini

Last information update: March 2025

Product configuration: EK62.47

EK62.47: 5 - cell Recessed luminaire - LED Neutral white - Incorporated DALI dimmable power supply - Wide Flood optic - 12.7W
1275lm - 4000K - Black / White

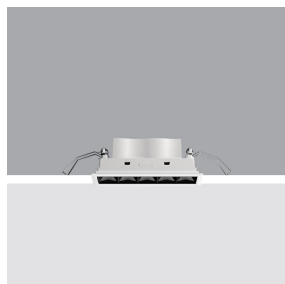

Product code

EK62.47: 5 - cell Recessed luminaire - LED Neutral white - Incorporated DALI dimmable power supply - Wide Flood optic - 12.7W
1275lm - 4000K - Black / White

Technical description

rectangular miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - wide flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with DALI dimmable electronic control gear connected to the luminaire. High efficiency value Neutral White LED (lm/W).

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

Colour

Black / White (47)

Weight (Kg)

0.3

Mounting

wall recessed|ceiling recessed

Wiring


on control gear box; screw connections with terminal block included

Complies with EN60598-1 and pertinent regulations



IP20 IP23

On the visible part of the product once installed



Technical data

lm system:	1275	CRI (typical):	82
W system:	12.7	Colour temperature [K]:	4000
lm source:	1500	MacAdam Step:	3
W source:	9.9	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	100.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	85	Number of optical assemblies:	1
Beam angle [°]:	48°	Control:	DALI-2
CRI (minimum):	80		


Polar

<p>lmax=2289 cd</p> <p>90° 180° 90°</p> <p>2500</p> <p>0°</p> <p>α=49°</p>	CIE				Lux			
	nL 0.85							
	100-100-100-100-85							
	UGR 11.4-11.4							
	DIN							
	A.61				h d Em Emax			
	UTE				2 1.8 435 572			
	0.85A+0.00T				4 3.6 109 143			
	F*1=995				6 5.4 48 64			
	F*1+F*2=1000				8 7.3 27 36			
F*1+F*2+F*3=1000								
CIBSE								
LG3 L<1500 cd/m² at 65°								
UGR<16 L<1500 cd/mq @65°								

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	73	70	68	72	70	69	66	78
1.0	80	77	74	72	76	73	73	70	83
1.5	84	81	79	78	80	79	78	75	88
2.0	87	85	83	82	84	82	81	79	93
2.5	88	87	86	85	86	84	84	81	96
3.0	89	88	87	87	87	86	85	83	98
4.0	90	90	89	88	88	88	86	84	99
5.0	91	90	90	90	89	89	87	85	100

Luminance curve limit

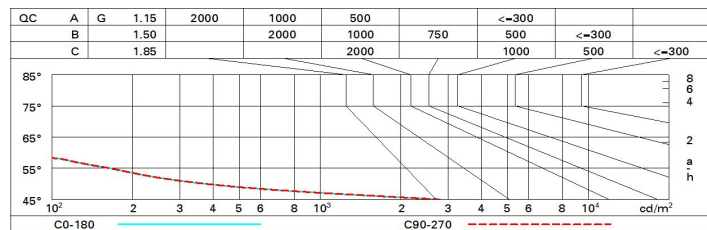

UGR diagram

Corrected UGR values (at 1500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	12.0	12.6	12.3	12.8	13.0	12.0	12.6	12.3	12.8	13.0
	3H	11.9	12.4	12.2	12.6	12.9	11.9	12.4	12.2	12.6	12.9
	4H	11.8	12.3	12.2	12.6	12.9	11.8	12.3	12.2	12.6	12.9
	6H	11.7	12.2	12.1	12.5	12.8	11.7	12.2	12.1	12.5	12.8
	8H	11.7	12.1	12.1	12.4	12.8	11.7	12.1	12.1	12.4	12.8
	12H	11.7	12.1	12.0	12.4	12.7	11.7	12.1	12.0	12.4	12.7
4H	2H	11.8	12.3	12.2	12.6	12.9	11.8	12.3	12.2	12.6	12.9
	3H	11.7	12.1	12.0	12.4	12.7	11.7	12.1	12.0	12.4	12.7
	4H	11.6	11.9	12.0	12.3	12.7	11.6	11.9	12.0	12.3	12.7
	6H	11.5	11.8	11.9	12.2	12.6	11.5	11.8	11.9	12.2	12.6
	8H	11.4	11.7	11.9	12.1	12.6	11.4	11.7	11.9	12.1	12.6
	12H	11.4	11.6	11.8	12.1	12.5	11.4	11.6	11.8	12.1	12.5
8H	4H	11.4	11.7	11.9	12.1	12.6	11.4	11.7	11.9	12.1	12.6
	6H	11.3	11.6	11.8	12.0	12.5	11.3	11.6	11.8	12.0	12.5
	8H	11.3	11.5	11.8	11.9	12.4	11.3	11.5	11.8	11.9	12.4
	12H	11.2	11.4	11.7	11.9	12.4	11.2	11.4	11.7	11.9	12.4
12H	4H	11.4	11.6	11.8	12.1	12.5	11.4	11.6	11.8	12.1	12.5
	6H	11.3	11.5	11.8	11.9	12.4	11.3	11.5	11.8	11.9	12.4
	8H	11.2	11.4	11.7	11.9	12.4	11.2	11.4	11.7	11.9	12.4
Variations with the observer position at spacing:											
S =	1.0H	5.9 / -29.1					5.9 / -29.1				
	1.5H	8.7 / -38.7					8.7 / -38.7				
	2.0H	10.7 / -48.4					10.7 / -48.4				