


Last information update: October 2024

**Product configuration: ES06+X490.13+700mA**

ES06: Floor-recessed Orbit luminaire D=45mm - Flush-mounted all glass cover - Warm White LED - Super Spot optic  
X490.13: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Steel



**Product code**

ES06: Floor-recessed Orbit luminaire D=45mm - Flush-mounted all glass cover - Warm White LED - Super Spot optic

**Technical description**

Floor or ground-recessed luminaire designed to use white monochrome LED lamps, a fixed optic and powered with a continuous current of 350/500/700mA. The product consists of a flush-mounted glass cover and an optical assembly made of AISI 304 stainless steel. The extra-clear sodium-calcium glass cover, with black serigraphy, is fixed to the optical assembly by means of a silicone seal. The luminaire is fixed to the outer casing using special locking seals that hold it in place. The unit comes complete with LED circuit and methacrylate lens. The product's wiring system features an A2 stainless steel cable gland with a 1800 mm long H05RNF type 2x1 mm<sup>2</sup> output power cable. The cable is equipped with an anti-transpiration device (IP68) that consists of a silicone-coated joint located on the power cable. An outer casing is available for installation and can be ordered separately from the plastic optic assembly. The glass unit, optical assembly and outer casing together guarantee a maximum static load resistance of 2000 kg. The maximum surface temperature of the glass is less than 40°C.

**Installation**

The product is fixed to the outer casing using special locking seals with toolfree installation. The unit can be floor-recessed using the outer casing for installation or ground-recessed without the outer casing.

**Colour**  
Black (04)

**Weight (Kg)**  
0.59

**Mounting**

Floor recessed|ground recessed













**Wiring**

Ballasts available: traditional and IP67 sealed 350/500/700mA. The product comes complete with a 1800 mm long H05RNF type 2x1 mm<sup>2</sup> output power cable and an electronic plate with a 350/500/700mA Max LED. Ballast to be ordered separately.

**Notes**

IP68 rating on both the product and the cable using IP68 connectors \* The product is not suitable for installation in swimming pools and fountains.

Complies with EN60598-1 and pertinent regulations



Complete immersion for limited periods, not suitable for use in swimming pools or fountains.

The lighting fixtures were designed and tested to withstand a static load of up to 20000 N and to resist drive-over stress by vehicles with tires. The fixtures cannot be used in lanes subjected to horizontal stresses due to acceleration, braking and / or changes of direction.

**Accessory code**

X490.13: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Steel



**Technical description**

Made of plastic (polypropylene). Complete with front cap, cable extraction system and twin cable entrance.

**Installation**

Mounted on (concrete) walls, floors and ceilings using special brackets (anchors)

**Colour**  
Steel (13)

**Weight (Kg)**  
0.17

**Mounting**

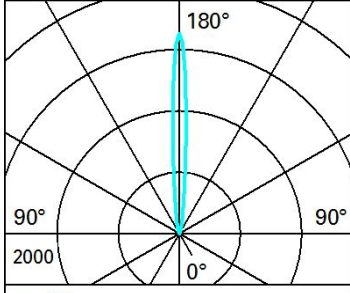
ground surface|Floor recessed|ground recessed

Complies with EN60598-1 and pertinent regulations

**Technical data**

|  |      |                                       |                                |
|--|------|---------------------------------------|--------------------------------|
| Im system:   | 146  | Colour temperature [K]:               | 2700                           |
| W system:  | 2    | MacAdam Step:                         | 2                              |
| Im source:   | 240  | Life Time LED 1:                      | 100,000h - L80 - B10 (Ta 25°C) |
| W source:  | 2    | Lamp code:                            | LED                            |
| Luminous efficiency (Im/W, real value):            | 73.2 | Number of lamps for optical assembly: | 1                              |
| Im in emergency mode:                              | -    | ZVEI Code:                            | LED                            |
| Total light flux at or above an angle of 90° [Lm]: | 146  | Number of optical assemblies:         | 1                              |
| Light Output Ratio (L.O.R.) [%]:                   | 61   | Intervallo temperatura ambiente:      | from -25°C to 35°C.            |
| Beam angle [°]:                                    | 8°   | LED current [mA]:                     | 700                            |
| CRI (minimum):                                     | 80   |                                       |                                |

**Polar**

| Imax=3259 cd  |      | Lux |     |     |                  |
|---|------|-----|-----|-----|------------------|
|   |      | h   | d   | Em  | E <sub>max</sub> |
|  | 180° |     |     |     |                  |
|   |      | 4   | 0.6 | 152 | 204              |
|   |      | 8   | 1.1 | 38  | 51               |
|   |      | 12  | 1.7 | 17  | 23               |
| 90°   |      | 16  | 2.2 | 10  | 13               |
| 2000  |      |     |     |     |                  |
| α=8°  | 0°   |     |     |     |                  |