



Last information update: April 2025

**Product configuration: P765.47**

P765.47: Frame adjustable recessed luminaire - Warm LED - DALI dimmable control gear - Flood - Black / White

**Product code**

P765.47: Frame adjustable recessed luminaire - Warm LED - DALI dimmable control gear - Flood - Black / White

**Technical description**

Adjustable optic, recessed luminaire for a Warm White LED lamp with a high color rendering index. Passive heat dissipation system. The adjustable body can turn in a set-back position in relation to the flush-mounted recessed housing to ensure precise lighting that is extremely comfortable and reduces direct glare significantly. Internal rotation of 358° and a tilting movement of 35° with mechanical locking systems for both movements. Fixed recessed luminaire in die-cast aluminium with a perimeter surface frame. The adjustable unit includes a radiant element in aluminium, with a steel coupling for the optic unit and a thermoplastic rotation locknut. Metallised thermoplastic reflector with a high definition optic. Thermoplastic anti-glare external screen. Transparent glass cover for LED lamp. Supplied with a dimmable DALI ballast unit connected to the luminaire.

**Installation**

Recessed with steel torsion springs for false ceilings from 1 to 25 mm thick - preparation hole 125 x 125. Installation possible in a horizontal position.

**Weight (Kg)**

1.2

**Mounting**

ceiling recessed

**Wiring**

Quick-coupling connections on the ballast unit terminal block - Digital electronic cabling that allows dimming to be performed with DALI protocol or pushbutton systems (TOUCH DIM)


**Notes**

Technical and decorative accessories available; with the option of installing two accessories simultaneously. The product has a white finish (01) that maintains its UGR < 19 performance unaltered even when luminance values vary slightly.

Complies with EN60598-1 and pertinent regulations

**Technical data**


Im system:	1916	CRI (minimum):	90
W system:	31.9	Colour temperature [K]:	2700
Im source:	3200	MacAdam Step:	2
W source:	28	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	60.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical 1 assembly:	
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	60	Number of optical assemblies:	1
Beam angle [°]:	34°	Control:	DALI

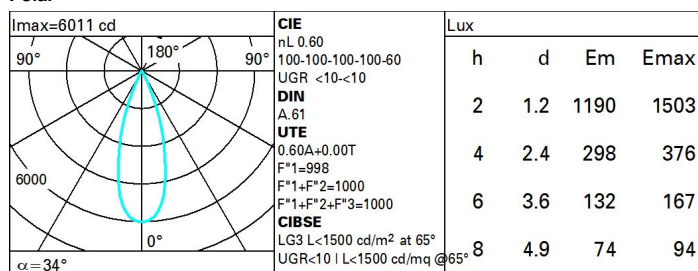**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	51	49	48	51	49	49	47	78
1.0	56	54	52	51	53	52	52	50	83
1.5	59	57	56	55	57	55	55	53	89
2.0	61	60	59	58	59	58	57	56	93
2.5	62	61	60	60	60	60	59	57	96
3.0	63	62	62	61	61	61	60	59	98
4.0	64	63	63	62	62	62	61	59	99
5.0	64	64	63	63	63	62	61	60	100

# Luminance curve limit

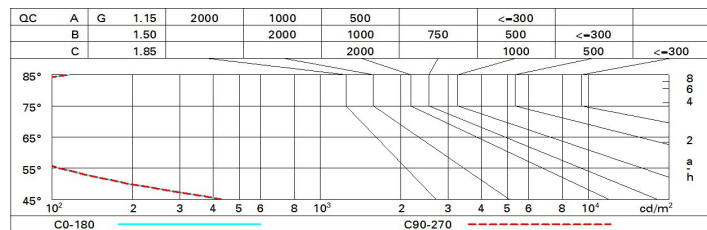

# UGR diagram

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	-0.0	0.5	0.3	0.7	1.0	-0.0	0.5	0.3	0.7	1.0
	3H	-0.1	0.3	0.2	0.6	0.9	-0.1	0.3	0.2	0.6	0.9
	4H	-0.2	0.2	0.1	0.5	0.8	-0.2	0.2	0.1	0.5	0.8
	6H	-0.3	0.1	0.1	0.4	0.8	-0.3	0.1	0.1	0.4	0.7
	8H	-0.3	0.1	0.0	0.4	0.7	-0.3	0.1	0.0	0.4	0.7
	12H	-0.3	0.0	0.0	0.4	0.7	-0.4	0.0	0.0	0.3	0.7
4H	2H	-0.2	0.2	0.1	0.5	0.8	-0.2	0.2	0.1	0.5	0.8
	3H	-0.4	0.0	0.0	0.3	0.7	-0.4	0.0	0.0	0.3	0.7
	4H	-0.4	-0.1	-0.1	0.2	0.6	-0.4	-0.1	-0.1	0.2	0.6
	6H	-0.5	-0.2	-0.1	0.2	0.6	-0.5	-0.2	-0.1	0.1	0.6
	8H	-0.6	-0.3	-0.1	0.1	0.5	-0.6	-0.3	-0.1	0.1	0.5
	12H	-0.6	-0.4	-0.2	0.1	0.5	-0.6	-0.4	-0.2	0.0	0.5
8H	4H	-0.6	-0.3	-0.1	0.1	0.5	-0.6	-0.3	-0.1	0.1	0.5
	6H	-0.7	-0.5	-0.2	-0.0	0.5	-0.7	-0.4	-0.2	0.0	0.5
	8H	-0.7	-0.5	-0.2	-0.1	0.4	-0.7	-0.5	-0.2	-0.1	0.4
	12H	-0.7	-0.6	-0.2	-0.1	0.4	-0.8	-0.6	-0.3	-0.1	0.4
12H	4H	-0.6	-0.4	-0.2	0.0	0.5	-0.6	-0.4	-0.2	0.1	0.5
	6H	-0.7	-0.5	-0.2	-0.1	0.4	-0.7	-0.5	-0.2	-0.0	0.5
	8H	-0.8	-0.6	-0.3	-0.1	0.4	-0.7	-0.6	-0.2	-0.1	0.4
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -12.8					6.3 / -12.8				
	1.5H	9.1 / -13.9					9.1 / -13.9				
	2.0H	11.1 / -14.4					11.1 / -14.4				