

Last information update: March 2025

**Product configuration: PG46.M6**

PG46.M6: Module for Superrail 48V track - BLE Casambi - UGR&lt;19 - L=1372 - - 11W 1428lm - 3000K - CRI 90 - White/Black Transparent

**Product code**

PG46.M6: Module for Superrail 48V track - BLE Casambi - UGR&lt;19 - L=1372 - - 11W 1428lm - 3000K - CRI 90 - White/Black Transparent

**Technical description**

Linear lighting product with Warm White CRI90 monochrome LED complete with adapter for installation on a Superrail 48V track. UGR<19 luminaire with controlled luminance ( $L \leq 3000 \text{ cd/m}^2$ ) ideal for environments with video screen use. Opti-Diamond Space optic available in a White Cover (Transparent white) or Black Cover (Transparent black) version. Frameless version main body made of extruded aluminium. A rapid tool-free system for connecting the adapter electrically and mechanically to the track. The adapter made of a thermoplastic material includes the DC/DC driver circuit and Bluetooth protocol. Integrated «Bluetooth Casambi» technology allows each light module inserted on the track to be adjusted independently. Bluetooth Low Energy (Casambi) technology. Frequency 2.4 GHz BLE. The luminaire can be controlled with the Casambi App that enables on-off, dimming and scene recall functions. The app is available on the Apple Store and Google Play Store. It can be integrated in the system's "Mesh" network that allows multiple luminaires to be controlled. OTA (over the air) update via app. Integrated Beacon that can be activated via Smart Light Control (iBeacon) that enables functions including push notification and indoor navigation-wayfinding.

**Installation**

An adapter is used to fix the device mechanically and tool-free to the 48V track. Max luminaire-luminaire distance (\*): 8 m; max smartphone-luminaire distance (\*): 20 m.

**Colour**

White/Black Transparent (M6)

**Weight (Kg)**

0.75

**Mounting**

Low voltage track

**Wiring**

Direct connection on 48V track. Track power supply unit to be ordered separately. Luminaire that can be controlled with Bluetooth technology (Casambi).

**Notes**


(\*) The maximum distance for Bluetooth installations is affected by physical obstacles, like walls, metal panels and the layout of the system. We suggest that a test is conducted at the installation site. Technical and anti-glare accessories available; with option of the combined installation of two internal accessories.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1294	MacAdam Step:	3
W system:	9.5	Lamp code:	LED
Im source:	1680	Number of lamps for optical assembly:	1
W source:	9.5	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	136.2	Number of optical assemblies:	1
Im in emergency mode:	-	LED current [mA]:	39
Total light flux at or above an angle of 90° [Lm]:	25	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	77	Minimum dimming %:	1
CRI (minimum):	90	Control:	Casambi
Colour temperature [K]:	3000		


**Polar**

Imax=1363 cd				C75-255		CIE		Lux					
90°				180°		90°		nL 0.77	h	d1	d2	Em	Emax
						94-99-99-98-77	1	1.1	1.2	1046	1329		
						UGR 11.3<10		2	2.3	2.3	261	332	
						DIN A.61		3	3.4	3.5	116	148	
						UTE 0.76A+0.01T		4	4.6	4.6	65	83	
						F*1=940							
						F*1+F*2=985							
						F*1+F*2+F*3=994							
						CIBSE LG3 L<3000 cd/m² at 65°							
						UGR<16   L<3000 cd/mq @65°							

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	67	63	60	58	62	59	59	56	74
1.0	70	66	64	62	65	63	63	60	79
1.5	74	71	69	67	70	68	67	65	86
2.0	77	75	73	72	73	72	71	68	90
2.5	78	77	75	74	75	74	73	71	93
3.0	80	78	77	76	77	76	75	72	96
4.0	81	80	79	78	78	77	76	74	97
5.0	81	80	80	79	79	78	77	74	99

# Luminance curve limit

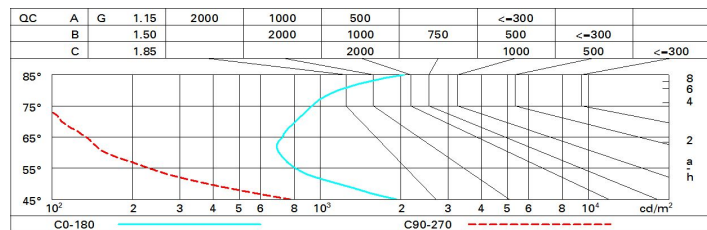

# UGR diagram

Corrected UGR values (at 1680 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	11.5	12.1	11.8	12.4	12.7	9.8	10.5	10.1	10.7	11.0
	3H	11.4	12.0	11.7	12.3	12.6	9.7	10.3	10.0	10.6	10.9
	4H	11.4	12.0	11.8	12.3	12.6	9.6	10.2	9.9	10.5	10.8
	6H	11.4	12.0	11.8	12.3	12.7	9.5	10.0	9.9	10.4	10.7
	8H	11.5	12.0	11.9	12.4	12.7	9.5	10.0	9.9	10.3	10.7
	12H	11.6	12.1	12.0	12.5	12.9	9.4	9.9	9.8	10.3	10.7
4H	2H	11.2	11.8	11.6	12.1	12.5	9.6	10.2	10.0	10.5	10.9
	3H	11.2	11.7	11.6	12.0	12.4	9.5	10.0	9.9	10.3	10.7
	4H	11.2	11.6	11.6	12.0	12.4	9.4	9.8	9.8	10.2	10.7
	6H	11.3	11.6	11.7	12.1	12.5	9.3	9.7	9.8	10.1	10.6
	8H	11.3	11.7	11.8	12.1	12.6	9.3	9.6	9.8	10.1	10.6
	12H	11.5	11.8	12.0	12.3	12.8	9.3	9.6	9.7	10.0	10.5
8H	4H	11.1	11.4	11.5	11.9	12.3	9.3	9.6	9.8	10.1	10.6
	6H	11.2	11.4	11.7	11.9	12.4	9.2	9.5	9.7	10.0	10.5
	8H	11.3	11.5	11.8	12.0	12.5	9.2	9.4	9.7	9.9	10.5
	12H	11.5	11.7	12.0	12.2	12.8	9.2	9.4	9.7	9.9	10.5
12H	4H	11.0	11.3	11.5	11.8	12.3	9.3	9.6	9.8	10.0	10.5
	6H	11.1	11.4	11.6	11.9	12.4	9.2	9.4	9.7	9.9	10.5
	8H	11.2	11.4	11.8	12.0	12.5	9.2	9.4	9.7	9.9	10.5
Variations with the observer position at spacing:											
S =	1.0H	4.5 / -5.1					4.6 / -8.4				
	1.5H	7.2 / -5.5					7.4 / -9.1				
	2.0H	9.1 / -6.0					9.3 / -9.4				