

Last information update: March 2025

Product configuration: PG54.M6

PG54.M6: Module for Superrail 48V track - DALI - Warm White - GL - L=916 - - 14.8W 1836lm - 3000K - CRI 90 - White/Black Transparent

**Product code**

PG54.M6: Module for Superrail 48V track - DALI - Warm White - GL - L=916 - - 14.8W 1836lm - 3000K - CRI 90 - White/Black Transparent

Technical description

Linear lighting product with Warm White CRI90 monochrome LED complete with adapter for installation on a Superrail 48V track. General Light (High Output) luminaire with Opti-Diamond Space optic available in a White Cover (Transparent white) or Black Cover (Transparent black) version. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each light module on the track to be adjusted separately. Frameless version main body made of extruded aluminium. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

Installation

Mechanical fastening with adapter on a Superrail 48V track

Colour

White/Black Transparent (M6)

Weight (Kg)

0.52

Mounting

Low voltage track


Wiring

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.

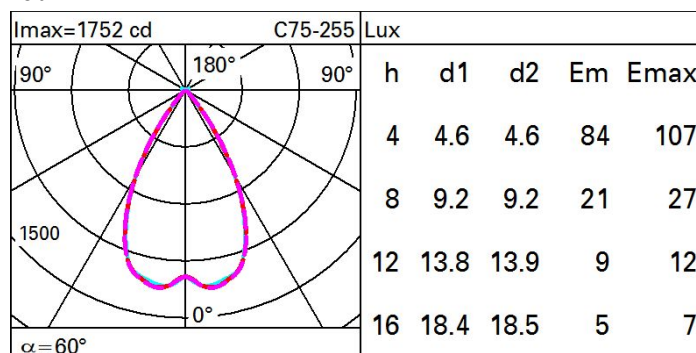
Complies with EN60598-1 and pertinent regulations



IP20

**Technical data**

lm system:	1663	MacAdam Step:	3
W system:	13	Lamp code:	LED
lm source:	2160	Number of lamps for optical assembly:	1
W source:	13	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	127.9	Number of optical assemblies:	1
lm in emergency mode:	-	LED current [mA]:	77
Total light flux at or above an angle of 90° [Lm]:	32	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	77	Minimum dimming %:	5
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI

Polar

Isolux

