


**Product configuration: Q937**

Q937: Frame recessed luminaire - 5 cells - General Lighting Pro - DALI



Q937: Frame recessed luminaire - 5 cells - General Lighting Pro - DALI

Rectangular recessed luminaire with 5 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. The total white finish and the patented technology of the optic system guarantee an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic control gear connected to the luminaire. High colour rendering LED.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141.


**Colour**  
White (01)

Weight (Kg)  
0.3

wall recessed ceiling recessed

On control gear box with quick-coupling connections.

Complies with EN60598-1 and pertinent regulations

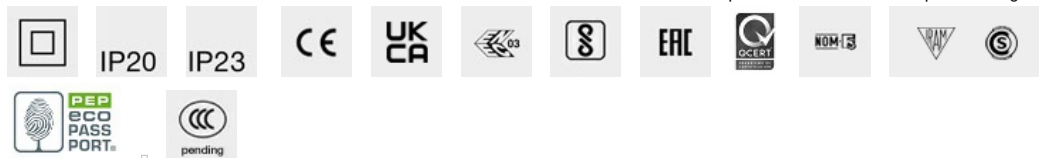

Im system:	619.2	Life Time LED 1:	50,000h - L90 - B10 (Ta 25C)
W system:	13.0	Lamp code:	LED
Im source:	860	Number of lamps for optical assembly:	1
W source:	10	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	47.63	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0.0	Inrush current:	20 A / 50 µs
Light Output Ratio (L.O.R.) [%]:	72	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 50 luminaires B16A: 80 luminaires C10A: 83 luminaires C16A: 136 luminaires
Beam angle [°]:	48°	Minimum dimming %:	1
CRI:	95	Overvoltage protection:	0kV Common mode & 0kV Differential mode
Colour temperature [K]:	2700	Control:	DALI-2
MacAdam Step:	3		