

QV69-01: Incasso a 5 celle - Ottica flood - 13.2W 805lm - Tunable white - CRI 90 - Bianco



Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	63	60	58	56	59	57	57	55	78
1.0	66	63	61	59	62	60	60	58	83
1.5	69	67	65	64	66	65	64	62	89
2.0	71	70	69	67	69	68	67	65	93
2.5	73	71	71	70	71	70	69	67	96
3.0	74	73	72	71	72	71	70	68	98
4.0	74	74	73	73	73	72	71	70	99
5.0	75	74	74	74	73	73	72	70	100

Curva limite di luminanza

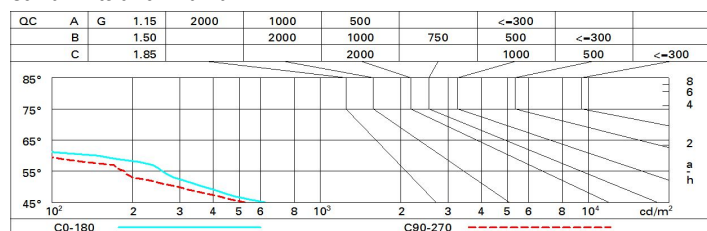


Diagramma UGR

Corrected UGR values (at 1150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	5.2	5.0	5.5	5.9	0.1	5.4	5.9	5.7	0.1	0.3
	3H	5.1	5.5	5.4	5.7	0.0	5.3	5.7	5.0	5.9	0.2
	4H	5.0	5.4	5.3	5.7	0.0	5.2	5.0	5.5	5.9	0.2
	6H	4.9	5.3	5.2	5.0	5.9	5.1	5.5	5.5	5.8	0.1
	8H	4.9	5.2	5.2	5.5	5.9	5.1	5.4	5.4	5.7	0.1
	12H	4.8	5.2	5.2	5.5	5.9	5.0	5.4	5.4	5.7	0.1
4H	2H	5.0	5.4	5.3	5.7	0.0	5.2	5.0	5.5	5.9	0.2
	3H	4.8	5.2	5.2	5.5	5.9	5.0	5.4	5.4	5.7	0.1
	4H	4.7	5.0	5.1	5.4	5.8	4.9	5.2	5.3	5.0	0.0
	6H	4.7	4.9	5.1	5.3	5.7	4.9	5.1	5.3	5.5	5.9
	8H	4.6	4.8	5.0	5.3	5.7	4.8	5.0	5.2	5.5	5.9
	12H	4.6	4.8	5.0	5.2	5.7	4.8	5.0	5.2	5.4	5.9
8H	4H	4.6	4.8	5.0	5.3	5.7	4.8	5.0	5.2	5.5	5.9
	6H	4.5	4.7	5.0	5.2	5.0	4.7	4.9	5.2	5.4	5.8
	8H	4.4	4.6	4.9	5.1	5.0	4.7	4.8	5.1	5.3	5.8
	12H	4.4	4.5	4.9	5.0	5.5	4.6	4.7	5.1	5.2	5.8
12H	4H	4.6	4.8	5.0	5.2	5.7	4.8	5.0	5.2	5.4	5.9
	6H	4.4	4.6	4.9	5.1	5.0	4.7	4.8	5.1	5.3	5.8
	8H	4.4	4.5	4.9	5.0	5.5	4.6	4.7	5.1	5.2	5.8
Variations with the observer position at spacing:											
S =		1.0H					6.7 / -17.0				
		1.5H					9.5 / -23.9				
		2.0H					11.5 / -33.7				