


Last information update: April 2025

Product configuration: R515.F6

R515.F6: Ø 212 mm - neutral white - WW - DALI - White/Transparent/Chrome

**Product code**

R515.F6: Ø 212 mm - neutral white - WW - DALI - White/Transparent/Chrome

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer and metallised flap to guarantee optimum vertical downlight. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in neutral white colour tone (4000K). Wall-washer light emission.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

Colour

White/Transparent/Chrome (F6)

Weight (Kg)

1.1

Mounting

ceiling surface

Wiring

Product complete with DALI components

Notes


TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations

**Technical data**

| | | | |
|--|-------|---------------------------------------|---------------------------------|
| Im system: | 2988 | Colour temperature [K]: | 4000 |
| W system: | 25.3 | MacAdam Step: | 2 |
| Im source: | 3600 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| W source: | 22 | Lamp code: | LED |
| Luminous efficiency (Im/W, real value): | 118.1 | Number of lamps for optical assembly: | 1 |
| Im in emergency mode: | - | ZVEI Code: | LED |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Number of optical assemblies: | 1 |
| Light Output Ratio (L.O.R.) [%]: | 83 | Control: | DALI-2 |
| CRI (minimum): | 80 | | |

Polar

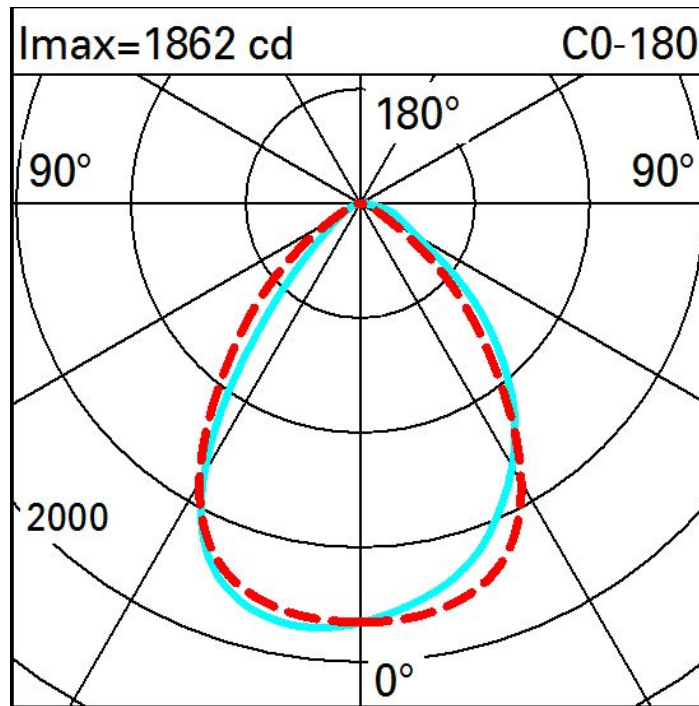

Illuminances

| Lux | | | | | | | | | | | | | Wall distance = 1m | |
|-----|----|----|----|----|-----|-----|-----|----|----|----|----|--|--------------------|--|
| 3 | | | | | | | | | | | | | | |
| | 2 | 4 | 11 | 31 | 96 | 156 | 96 | 31 | 11 | 4 | 2 | | | |
| 2 | 3 | 7 | 20 | 69 | 192 | 284 | 192 | 69 | 20 | 7 | 3 | | | |
| | 5 | 14 | 41 | 98 | 174 | 216 | 174 | 98 | 41 | 14 | 5 | | | |
| 1 | 10 | 22 | 44 | 80 | 117 | 134 | 117 | 80 | 44 | 22 | 10 | | | |
| | 12 | 23 | 39 | 59 | 75 | 83 | 75 | 59 | 39 | 23 | 12 | | | |
| 0 | | | | | | | | | | | | | | |
| | m | -2 | -1 | 0 | 1 | 2 | 3 | | | | | | | |