

Last information update: April 2025

**Product configuration: RS74.S4**

RS74.S4: Luminaire L=411,60 - Warm White - Integrated DALI - Very Wide Flood (Down) optic - UGR<19 - 18.6W 2479.5lm - 3000K  
- CRI 90 - Black/Black/Black Transparent

**Product code**

RS74.S4: Luminaire L=411,60 - Warm White - Integrated DALI - Very Wide Flood (Down) optic - UGR<19 - 18.6W 2479.5lm - 3000K  
- CRI 90 - Black/Black/Black Transparent

**Technical description**

Luminaire made of painted extruded aluminium, frame and caps made of injection-moulded thermoplastic. Very Wide Flood optic (80°) in a Space Opti-Diamond (PMMA) version with a rear cover available in a White (Transparent White) or Black (Transparent Black) version. Integrated DALI dimmable power supply with CRI90 direct emission Warm white (3000K) monochrome LED lamp (Mid-Power). Version with UGR < 19 controlled luminance - in compliance with the standard for use in environments with video monitors ( $L \leq 3000$  cd/m<sup>2</sup>). Option of rotation around a vertical axis by 360° with a mechanical rotation lock.

**Installation**

With a three-phase/DALI track or surface-mounted/recessed base

**Colour**

Black/Black/Black Transparent (S4)

**Weight (Kg)**

1.38

**Mounting**

internal wall corner|dali track|three circuit track|ceiling recessed|ceiling surface

**Wiring**


Product complete with DALI dimmable components housed inside the luminaire.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2496
W system:	19
Im source:	3200
W source:	19
Luminous efficiency (Im/W, real value):	131.4
Im in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	78
CRI (minimum):	90
Colour temperature [K]:	3000
MacAdam Step:	3


Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
Power factor:	See installation instructions
Inrush current:	10 A / 220 µs
Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
Minimum dimming %:	1
Overvoltage protection:	2kV Common mode & 1kV Differential mode
Control:	DALI-2

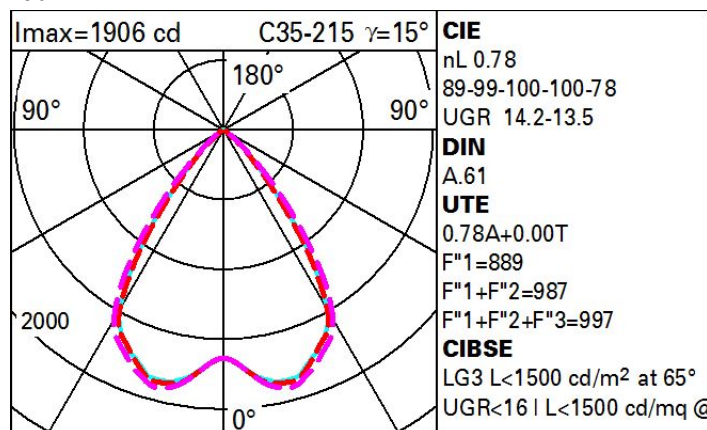**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	59	56	61	58	58	55	70
1.0	70	66	63	61	65	62	62	59	76
1.5	75	72	69	67	71	69	68	65	84
2.0	78	75	74	72	74	73	72	69	89
2.5	79	78	76	75	76	75	74	72	92
3.0	81	79	78	77	78	77	76	74	94
4.0	82	81	80	79	79	79	77	75	96
5.0	82	82	81	80	80	79	78	76	97

# Luminance curve limit

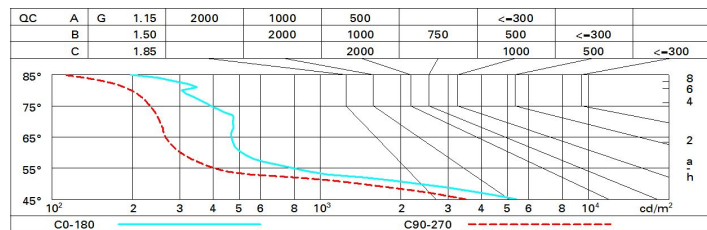

# UGR diagram

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x        y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.6	15.4	14.9	15.6	15.8	14.0	14.7	14.3	14.9	15.2
	3H	14.5	15.2	14.9	15.5	15.7	13.8	14.5	14.2	14.8	15.0
	4H	14.5	15.1	14.8	15.4	15.7	13.8	14.4	14.1	14.7	15.0
	6H	14.4	15.0	14.8	15.3	15.6	13.7	14.2	14.0	14.6	14.9
	8H	14.4	14.9	14.8	15.3	15.6	13.7	14.2	14.0	14.5	14.9
	12H	14.4	14.9	14.7	15.2	15.6	13.6	14.1	14.0	14.5	14.8
4H	2H	14.4	15.0	14.8	15.3	15.6	13.8	14.4	14.1	14.7	15.0
	3H	14.3	14.8	14.7	15.2	15.5	13.7	14.2	14.0	14.5	14.9
	4H	14.3	14.7	14.7	15.1	15.5	13.6	14.0	14.0	14.4	14.8
	6H	14.2	14.6	14.6	15.0	15.4	13.5	13.9	13.9	14.3	14.7
	8H	14.2	14.5	14.6	15.0	15.4	13.5	13.8	13.9	14.2	14.7
	12H	14.1	14.5	14.6	14.9	15.4	13.4	13.7	13.9	14.2	14.6
8H	4H	14.1	14.5	14.6	14.9	15.4	13.5	13.9	13.9	14.3	14.7
	6H	14.1	14.4	14.6	14.8	15.3	13.4	13.7	13.9	14.2	14.6
	8H	14.1	14.3	14.5	14.8	15.3	13.4	13.6	13.9	14.1	14.6
	12H	14.0	14.2	14.5	14.7	15.2	13.3	13.6	13.8	14.0	14.6
12H	4H	14.1	14.4	14.6	14.9	15.3	13.5	13.8	13.9	14.2	14.7
	6H	14.0	14.3	14.5	14.8	15.3	13.4	13.6	13.9	14.1	14.6
	8H	14.0	14.2	14.5	14.7	15.2	13.3	13.6	13.9	14.1	14.6
Variations with the observer position at spacing:											
S =	1.0H	3.6 / -9.1					3.7 / -9.7				
	1.5H	6.3 / -10.2					6.3 / -10.4				
	2.0H	8.3 / -10.7					8.3 / -10.6				