

Last information update: February 2025

Product configuration: RU34.12+RW67.04

RU34.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=2384 - Aluminium

RW67.04: Plate with Neutral White LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1971.2lm - 4000K - Black

**Product code**

RU34.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=2384 - Aluminium

Technical description

Recessed Minimal (Frameless) version with extruded aluminium profile installed flush with ceiling. Designed for use with an LED plate in MMO, Space and Wall Washer versions.

Installation

Can be recess-mounted.

Colour

Aluminium (12)

Wiring

Designed to house the LED modules that can be used by the system.

Complies with EN60598-1 and pertinent regulations

**Product code**

RW67.04: Plate with Neutral White LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1971.2lm - 4000K - Black

Technical description

Neutral White LED plate with direct (Down) light emission. Wall Washer High Output (HO) Wall Washer version to be used with suitable profiles to be ordered separately. The module optic and structural fittings allow high luminous flux and system efficiency values. DALI dimmable power supply integrated in the luminaire. Extruded aluminium heat sink formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. "Halogen Free" electric cables.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Black (04)

Weight (Kg)

1.89

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

lm system:	3942	Colour temperature [K]:	4000
W system:	37.9	MacAdam Step:	3
lm source:	7040	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	33	Lamp code:	LED
Luminous efficiency (lm/W, real value):	104	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	56	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

Polar

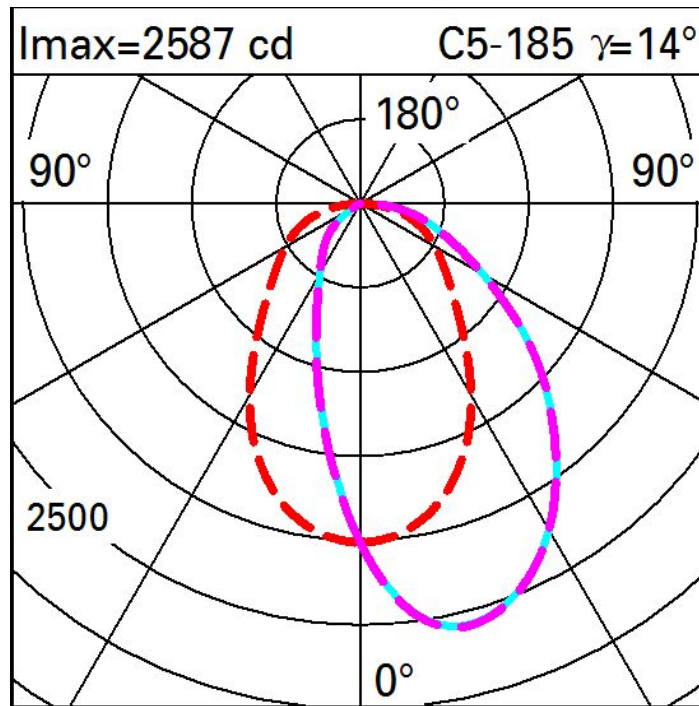

Illuminances

Lux													Wall distance = 1m	
3														
	12	25	56	134	317	482	317	134	56	25	12			
2	19	36	73	173	401	561	401	173	73	36	19			
	21	38	77	171	299	372	299	171	77	38	21			
1	21	37	71	130	192	224	192	130	71	37	21			
	20	36	60	92	121	135	121	92	60	36	20			
0														
	m	-2	-1	0	1	2	3							