


**Product configuration: UC73**

UC73: Span-wire installation - STwrWide optic - Neutral White



UC73: Span-wire installation - STwrWide optic - Neutral White

Luminaire with a direct light street optic with a maximum operating ambient temperature of 40°C for span-wire installation. The optical assembly is made of EN1706AC 46100LF aluminium alloy, subjected to a multi-step, pre-treatment process in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a textured acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The 5 mm thick, sodium-calcium closing glass for the optical assembly is fitted to the product via 4 screws. The metal component assembly is closed with 5 screws. The Midnight preset (100-70%) power supply can be programmed via NFC technology. The power supply includes an automatic internal temperature control system. The product is supplied with a Neutral White monochrome LED circuit. The component and optic assemblies can be opened using everyday tools. The light flow emitted in the upper hemisphere of the system in the horizontal position is null. The product is pre-wired with a 3m long outlet cable. All external screws are made of stainless steel.

The projector can be installed with a span-wire mounting using cables with 6 to 12 mm diameters. The attachment is included in the end product code.

**Colour**  
Black (04) | Grey (15)

**Weight (Kg)**  
6.95

span-wire installation


Complies with EN60598-1 and pertinent regulations



|  |                                |                                       |   |
|--|--------------------------------|---------------------------------------|---|
| lm system:   | 4056                           | Life Time LED 2:                      | 87,000h - L90 - B10 (Ta 40°C)             |
| W system:  | 26.2                           | Life Time LED 3:                      | 100,000h - L80 - B10 (Ta 40°C)            |
| lm source:   | -                              | Lamp code:                            | LED                                       |
| W source:  | -                              | Number of lamps for optical assembly: | 1   |
| Luminous efficiency (lm/W, real value):            | 154.8                          | ZVEI Code:                            | LED                                       |
| lm in emergency mode:                              | -                              | Number of optical assemblies:         | 1   |
| Total light flux at or above an angle of 90° [Lm]: | 0                              | Intervallo temperatura ambiente:      | from -15°C to 40°C.                       |
| Light Output Ratio (L.O.R.) [%]:                   | 100                            | Power factor:                         | See installation instructions             |
| CRI (minimum):                                     | 70                             | Inrush current:                       | 24.88 A / 236 µs                          |
| Colour temperature [K]:                            | 4000                           | Minimum dimming %:                    | 5   |
| MacAdam Step:                                      | 3                              | Overvoltage protection:               | 12kV Common mode & 12kV Differential mode |
| Life Time LED 1:                                   | 100,000h - L90 - B10 (Ta 25°C) | Control:                              | Middle of the night                       |

**I<sub>max</sub>=2048 cd**      **C0-180  $\gamma=70^\circ$**       **CIE**  
**LA<sup>0.5</sup>=190**  
**SPREAD=narrow**  
**THROW=intermediate**  
**SLI=5.1**  
**DIN**  
**KB2**  
**CEN**  
**G\*3**  
**D6**

# Isolux

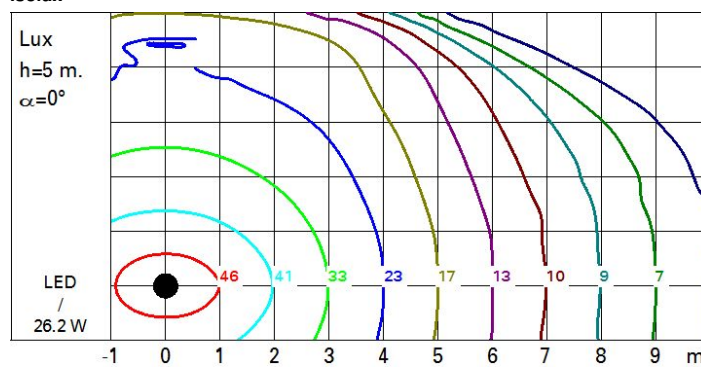

# Utilisation factors

