


Last information update: July 2025

**Product configuration: N248**

N248: wall-washer luminaire - Ø 125 mm - warm white - frame

**Product code**

N248: wall-washer luminaire - Ø 125 mm - warm white - frame

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K (CRI 90).

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1.02

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

**Notes**


TPb rated

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2138	Colour temperature [K]:	3000
W system:	32	MacAdam Step:	2
lm source:	3450	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	29	Lamp code:	LED
Luminous efficiency (lm/W, real value):	66.8	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	62	Control:	DALI-2
CRI (minimum):	90		

Polar

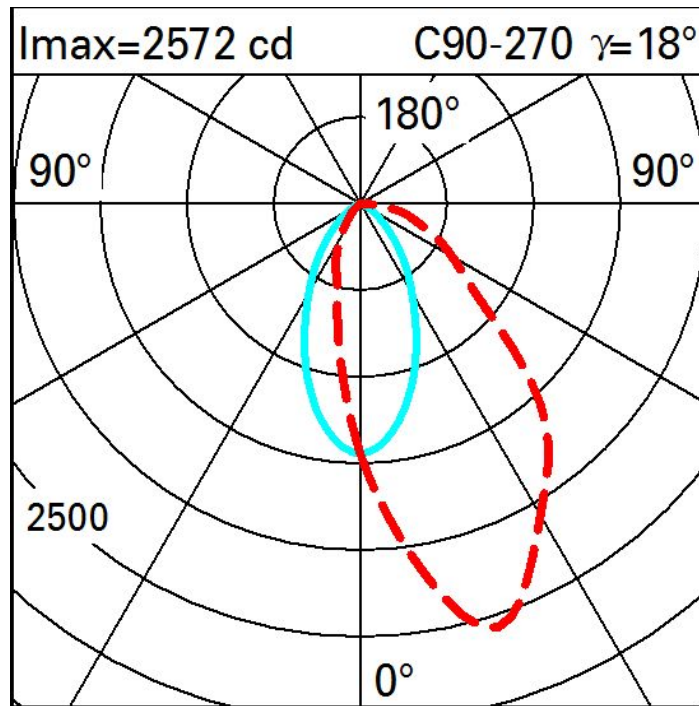

Illuminances

Lux											
						Wall distance = 1m					
3											
	0.4	1	6	29	160	362	160	29	6	1	0.4
2	2	6	21	73	240	445	240	73	21	6	2
	4	11	30	93	242	346	242	93	30	11	4
1	6	14	34	84	161	211	161	84	34	14	6
	7	16	33	64	104	134	104	64	33	16	7
0											
	m	-2	-1	0	1	2	3				