

Laser Blade


Design iGuzzini

iGuzzini

Last information update: April 2024

Product configuration: P148

P148: Recessed frame - LED - Warm White - Incorporated DALI dimmable power supply - Wall washer optic



Product code

P148: Recessed frame - LED - Warm White - Incorporated DALI dimmable power supply - Wall washer optic

Technical description

Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution. Flux enhancer - superpure aluminium reflector - screen in PMMA with ribbed texture; a special film in acrylic material, combined with the screen, allow for a uniform and effective light emission on the wall. Black polycarbonate internal perimeter frame. Supplied with DALI dimmable control gear connected to the luminaire. Warm 2700K high colour rendering LED.

Installation

recessed with steel springs for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal) - preparation slot 37 x 274. To light the wall correctly check the installation distances and centre-to-centre distances on the instructions sheet.

Colour

Black / Black (43) | Black / White (47) | Grey / Black (74)*

Weight (Kg)

0.6

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

on power box: screw connections

Notes

dimming function with pushbutton (TOUCH DIM/PUSH): for this option consult the instructions included in the package. Accessory anti-glare screen available code MPX8.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	663	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
W system:	24.5	Lamp code:	LED
Im source:	1700	Number of lamps for optical assembly:	1
W source:	21	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	27.1	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	21 A / 139 µs
Light Output Ratio (L.O.R.) [%]:	39	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 15 luminaires B16A: 24 luminaires C10A: 24 luminaires C16A: 40 luminaires
CRI (minimum):	95	Minimum dimming %:	1
CRI (typical):	97	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	2700	Control:	DALI-2
MacAdam Step:	3		

Polar

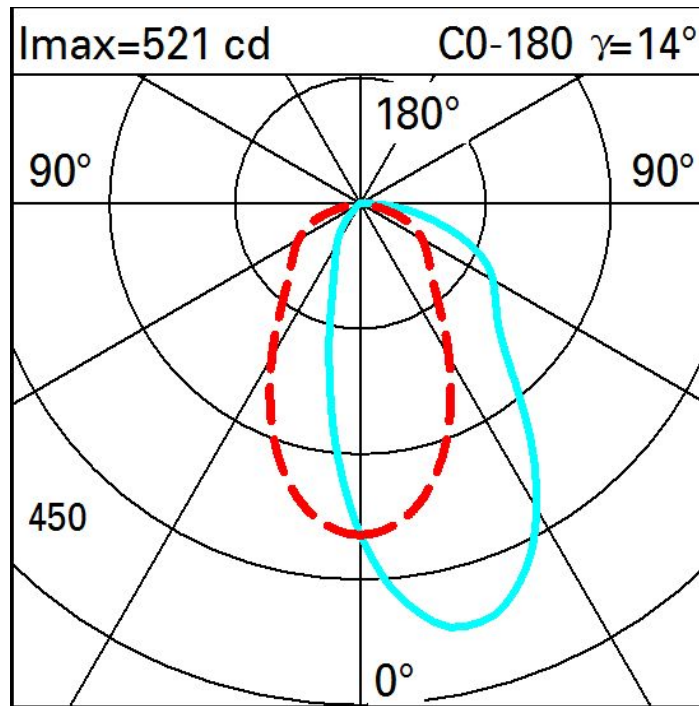

Illuminances

Lux												Wall distance = 1m	
3													
	2	4	10	26	72	122	72	26	10	4	2		
2	3	7	14	29	63	88	63	29	14	7	3		
	4	7	13	27	51	66	51	27	13	7	4		
1	4	6	11	22	36	43	36	22	11	6	4		
	3	6	10	16	23	27	23	16	10	6	3		
0													
	m	-2	-1	0	1	2	3						