



Last information update: October 2024

Product configuration: BU07

BU07: Wall/ceiling recessed, ø45mm luminaire without an electronic transformer - Warm White - 360° radial effect

**Product code**BU07: Wall/ceiling recessed, ø45mm luminaire without an electronic transformer - Warm White - 360° radial effect **Attention! Code no longer in production****Technical description**

Fixed, round, recessed luminaire designed for use with warm white LED lamps and a patented, 360° radial effect optic. Recessed luminaire consisting of a single die-cast aluminium body. The upper part is a heat sink which helps to dissipate the heat given off by the lamp. LED optics with a single methacrylate lens.

Installation

Recessed device with hot galvanised steel springs that make it easy-to-install in false ceilings between 1mm and 20mm thick.

Colour

White (01) | Grey (15) | Chrome (10)*

Weight (Kg)

0.08

* Colours on request

Mounting

wall surface|ceiling surface

Wiring

Product supplied with an outlet cable L=200mm. Electronic 250 mA ballast to be ordered separately.

Notes


Compatible with the Master Pro DMX control system. The chrome-coloured version of Trick (10) can only be used internally.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	266	Colour temperature [K]:	3000
W system:	4	MacAdam Step:	3
lm source:	590	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	4	Life Time LED 2:	50,000h - L90 - B10 (Ta 40°C)
Luminous efficiency (lm/W, real value):	66.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	147	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	45	Number of optical assemblies:	1
CRI (minimum):	80	LED current [mA]:	250

Polar

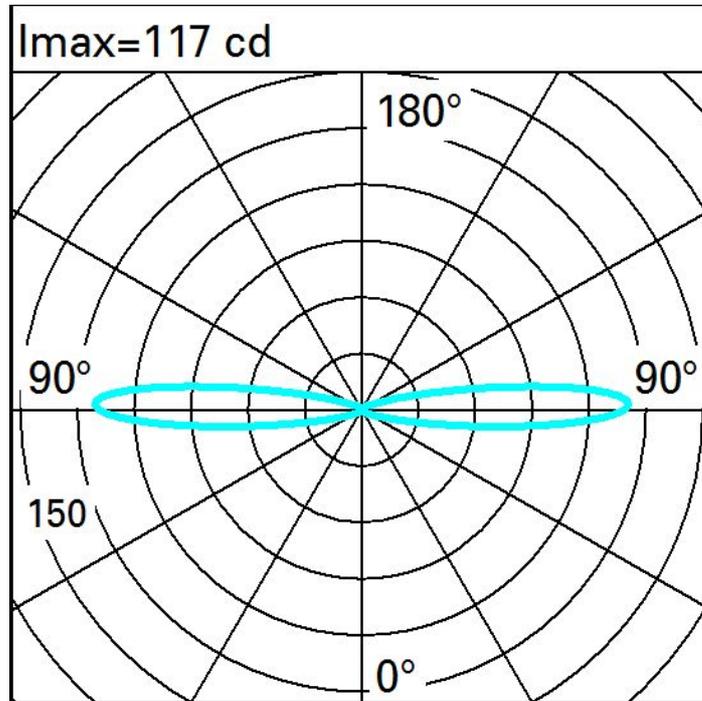

Isolux

