


BX81: Decken-Einbaugerät rechteckig, IP68, kleiner Leuchtenkörper, LED Warm White, Optik Spot.

Isolux

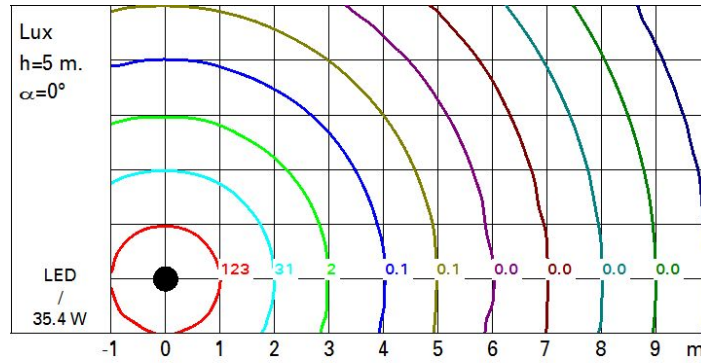

UGR-Diagramm

Corrected UGR values (at 2500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	-5.5	-3.4	-5.1	-3.1	-2.7	-5.5	-3.4	-5.1	-3.1	-2.7
	3H	-5.4	-3.9	-5.1	-3.6	-3.3	-5.6	-4.1	-5.2	-3.7	-3.4
	4H	-5.4	-4.2	-5.0	-3.9	-3.5	-5.6	-4.4	-5.2	-4.0	-3.7
	6H	-5.3	-4.5	-5.0	-4.1	-3.8	-5.6	-4.7	-5.2	-4.4	-4.0
	8H	-5.3	-4.4	-5.0	-4.1	-3.7	-5.6	-4.7	-5.3	-4.4	-4.0
	12H	-5.3	-4.3	-4.9	-4.0	-3.6	-5.7	-4.7	-5.3	-4.3	-4.0
4H	2H	-5.6	-4.4	-5.2	-4.0	-3.7	-5.4	-4.2	-5.0	-3.9	-3.5
	3H	-5.5	-4.4	-5.0	-4.1	-3.7	-5.4	-4.4	-5.0	-4.0	-3.6
	4H	-5.5	-4.3	-5.0	-3.9	-3.5	-5.5	-4.3	-5.0	-3.9	-3.5
	6H	-5.7	-3.9	-5.2	-3.5	-3.0	-5.8	-4.0	-5.3	-3.5	-3.0
	8H	-5.7	-3.8	-5.2	-3.3	-2.8	-5.9	-3.9	-5.4	-3.4	-2.9
	12H	-5.6	-3.6	-5.1	-3.2	-2.6	-5.9	-4.0	-5.4	-3.5	-3.0
8H	4H	-5.9	-3.9	-5.4	-3.4	-2.9	-5.7	-3.8	-5.2	-3.3	-2.8
	6H	-5.8	-4.0	-5.2	-3.5	-3.0	-5.6	-3.9	-5.1	-3.4	-2.9
	8H	-5.6	-4.1	-5.0	-3.6	-3.1	-5.6	-4.1	-5.0	-3.6	-3.1
	12H	-5.1	-4.3	-4.6	-3.8	-3.2	-5.3	-4.5	-4.8	-4.0	-3.5
12H	4H	-5.9	-4.0	-5.4	-3.5	-3.0	-5.6	-3.6	-5.1	-3.2	-2.6
	6H	-5.7	-4.2	-5.2	-3.7	-3.2	-5.4	-3.9	-4.9	-3.4	-2.9
	8H	-5.3	-4.5	-4.8	-4.0	-3.5	-5.1	-4.3	-4.6	-3.8	-3.2
Variations with the observer position at spacing:											
S = 1.0H		4.6 / -2.9					4.6 / -2.9				
1.5H		7.1 / -3.3					7.1 / -3.3				
2.0H		9.0 / -3.8					9.0 / -3.8				