

ME28: empotrable Ø 205 - LED de disipación pasiva neutral white - alimentación electrónica integrada - flood

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	66	66	63	77
1.0	77	73	71	69	73	70	70	67	82
1.5	81	78	76	74	77	75	75	72	88
2.0	83	81	80	79	80	79	78	76	92
2.5	85	83	82	81	82	81	80	78	95
3.0	86	85	84	83	84	83	82	80	97
4.0	87	86	86	85	85	84	83	81	99
5.0	87	87	86	86	86	85	84	82	100

Curva límite de luminancia

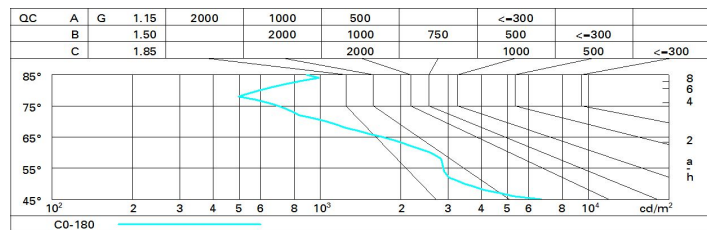


Diagrama UGR

Corrected UGR values (at 5000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.0	17.6	17.3	17.8	18.1	17.0	17.6	17.3	17.8	18.1
	3H	16.9	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	4H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6	17.9
	6H	16.7	17.2	17.1	17.5	17.8	16.7	17.2	17.1	17.5	17.8
	8H	16.7	17.1	17.0	17.5	17.8	16.7	17.1	17.0	17.5	17.8
	12H	16.6	17.1	17.0	17.4	17.8	16.6	17.1	17.0	17.4	17.8
4H	2H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6	17.9
	3H	16.6	17.1	17.0	17.4	17.8	16.6	17.1	17.0	17.4	17.8
	4H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	6H	16.5	16.8	16.9	17.2	17.6	16.5	16.8	16.9	17.2	17.6
	8H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6
	12H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
8H	4H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6
	6H	16.3	16.6	16.8	17.0	17.5	16.3	16.6	16.8	17.0	17.5
	8H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	12H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
12H	4H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
	6H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	8H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
Variations with the observer position at spacing:											
S =	1.0H	5.8 / -12.5					5.8 / -12.5				
	1.5H	8.6 / -13.5					8.6 / -13.5				
	2.0H	10.6 / -15.2					10.6 / -15.2				