

Last information update: March 2025

Product configuration: PW22

PW22: Robin spotlight Ø62 for installation on a 48V low voltage track - DALI Powerline



Product code

PW22: Robin spotlight Ø62 for installation on a 48V low voltage track - DALI Powerline

Technical description

Miniaturised adjustable spotlight with adapter for installation on a 48V Filorail low voltage track. The thermoplastic adapters are designed so they can be installed even in the curved track sections. Die-cast aluminium body with an ideal passive dissipation system to guarantee a long life and effective heat management. Driver circuit with DALI Powerline technology that allows each spotlight on the track to be adjusted independently. This offers a remarkable level of flexibility and lighting control. The swivel joints allow the spotlight to be rotated by 360° and tilted by 160°. The set back position of the optic unit guarantees a high level of visual comfort. A high definition thermoplastic lens with the option of using additional accessories to create other light effects. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

Installation

On a low voltage Filorail track. A tool-free system for connecting the product electrically and mechanically to the track.

Colour

White (01) | Black (04)


Weight (Kg)

0.75

Wiring

LED driver integrated in product body - direct connection on 48V track. Track power supply unit to be ordered separately.

Complies with EN60598-1 and pertinent regulations



Technical data


| | | | |
|--|------|---------------------------------------|---------------------------------|
| Im system: | 2268 | Colour temperature [K]: | 3500 |
| W system: | 24.6 | MacAdam Step: | 2 |
| Im source: | 2800 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| W source: | 24 | Voltage [Vin]: | 48 |
| Luminous efficiency (lm/W, real value): | 92.2 | Lamp code: | LED |
| Im in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 81 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 27° | Power factor: | See installation instructions |
| CRI (minimum): | 90 | Control: | DALI |

Polar

| Imax=9536 cd | | C0-180 | | Lux | |
|--------------|-----|--------|------|------|--|
| h | d1 | d2 | Em | Emax | |
| 2 | 1 | 1 | 1937 | 2384 | |
| 4 | 1.9 | 2 | 484 | 596 | |
| 6 | 2.9 | 3 | 215 | 265 | |
| 8 | 3.9 | 4 | 121 | 149 | |

α = 27°

Isolux

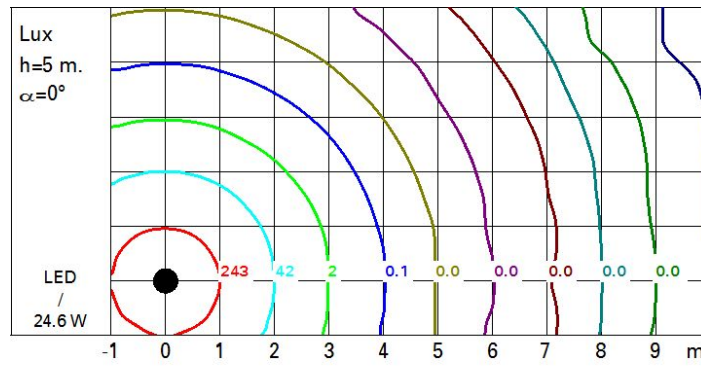

UGR diagram

| Corrected UGR values (at 2800 lm bare lamp luminous flux) | | | | | | | | | | | |
|---|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Riflect.: | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| ceiling/cav | | | | | | | | | | | |
| walls | | | | | | | | | | | |
| work pl. | | | | | | | | | | | |
| Room dim | | viewed crosswise | | | | | viewed endwise | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | -0.3 | 1.8 | 0.0 | 2.2 | 2.5 | -0.9 | 1.2 | -0.6 | 1.5 | 1.9 |
| | 3H | -0.5 | 1.2 | -0.1 | 1.6 | 1.9 | -1.0 | 0.6 | -0.7 | 1.0 | 1.3 |
| | 4H | -0.5 | 0.9 | -0.1 | 1.2 | 1.6 | -1.1 | 0.3 | -0.7 | 0.6 | 1.0 |
| | 6H | -0.6 | 0.5 | -0.2 | 0.8 | 1.2 | -1.1 | -0.1 | -0.7 | 0.2 | 0.6 |
| | 8H | -0.6 | 0.4 | -0.2 | 0.8 | 1.1 | -1.2 | -0.1 | -0.8 | 0.2 | 0.6 |
| 12H | -0.6 | 0.4 | -0.2 | 0.7 | 1.1 | -1.2 | -0.2 | -0.8 | 0.1 | 0.5 | |
| 4H | 2H | -0.5 | 0.9 | -0.1 | 1.2 | 1.6 | -1.1 | 0.3 | -0.7 | 0.6 | 1.0 |
| | 3H | -0.6 | 0.4 | -0.2 | 0.8 | 1.2 | -1.2 | -0.2 | -0.8 | 0.2 | 0.6 |
| | 4H | -0.7 | 0.3 | -0.3 | 0.6 | 1.1 | -1.3 | -0.3 | -0.8 | 0.1 | 0.5 |
| | 6H | -1.1 | 0.6 | -0.6 | 1.1 | 1.5 | -1.7 | 0.1 | -1.2 | 0.5 | 1.0 |
| | 8H | -1.2 | 0.7 | -0.7 | 1.2 | 1.7 | -1.8 | 0.1 | -1.3 | 0.6 | 1.1 |
| 12H | -1.3 | 0.7 | -0.8 | 1.2 | 1.7 | -1.9 | 0.1 | -1.4 | 0.6 | 1.1 | |
| 8H | 4H | -1.2 | 0.7 | -0.7 | 1.2 | 1.7 | -1.8 | 0.1 | -1.3 | 0.6 | 1.1 |
| | 6H | -1.4 | 0.5 | -0.8 | 1.0 | 1.5 | -1.9 | -0.1 | -1.4 | 0.4 | 0.9 |
| | 8H | -1.4 | 0.3 | -0.9 | 0.8 | 1.3 | -1.9 | -0.3 | -1.4 | 0.2 | 0.7 |
| | 12H | -1.2 | -0.1 | -0.7 | 0.4 | 0.9 | -1.8 | -0.7 | -1.3 | -0.2 | 0.3 |
| 12H | 4H | -1.3 | 0.7 | -0.8 | 1.2 | 1.7 | -1.9 | 0.1 | -1.4 | 0.6 | 1.1 |
| | 6H | -1.4 | 0.3 | -0.9 | 0.8 | 1.3 | -1.9 | -0.3 | -1.4 | 0.2 | 0.7 |
| | 8H | -1.2 | -0.1 | -0.7 | 0.4 | 0.9 | -1.8 | -0.7 | -1.3 | -0.2 | 0.3 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 5.6 / -7.8 | | | | | 5.3 / -6.7 | | | | |
| | 1.5H | 8.3 / -10.1 | | | | | 8.0 / -8.0 | | | | |
| | 2.0H | 10.3 / -14.0 | | | | | 10.0 / -11.9 | | | | |