

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: Q485

Q485: Frame 5 cells - Flood beam - LED



Product code

Q485: Frame 5 cells - Flood beam - LED

Technical description

Linear miniaturised recessed luminaire with 5 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 96.

Weight (Kg)

0.35


Mounting

wall recessed|ceiling recessed

Wiring

On the power supply unit with terminal board included.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	955	CRI (minimum):	90
W system:	12.7	Colour temperature [K]:	4000
lm source:	1150	MacAdam Step:	2
W source:	9.9	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	75.2	Voltage [Vin]:	230
lm in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	83	ZVEI Code:	LED
Beam angle [°]:	43°	Number of optical assemblies:	1


Polar

<p>$I_{max}=1960\text{ cd}$</p> <p>90° 180° 90°</p> <p>2000</p> <p>0°</p> <p>$\alpha=42^\circ$</p>	CIE nL 0.83 100-100-100-100-83 UGR <10-10				Lux			
	DIN A.61				h	d	Em	E _{max}
	UTE 0.83A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000				2	1.5	399	487
	CIBSE LG3 L<1500 cd/m ² at 65° UGR<10 L<1500 cd/mq @65°				4	3.1	100	122
					6	4.6	44	54
					8	6.1	25	30

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

Luminance curve limit

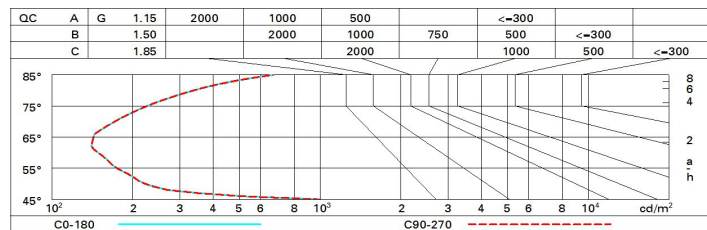

UGR diagram

Corrected UGR values (at 1150 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	8.0	8.5	8.3	8.7	9.0	8.0	8.5	8.3	8.7	9.0
	3H	7.9	8.3	8.2	8.6	8.9	7.9	8.3	8.2	8.6	8.9
	4H	7.8	8.2	8.2	8.5	8.8	7.8	8.2	8.2	8.5	8.8
	6H	7.8	8.1	8.1	8.4	8.8	7.8	8.1	8.1	8.4	8.8
	8H	7.7	8.1	8.1	8.4	8.7	7.7	8.1	8.1	8.4	8.7
	12H	7.7	8.0	8.1	8.4	8.7	7.7	8.0	8.1	8.4	8.7
4H	2H	7.8	8.2	8.2	8.5	8.8	7.8	8.2	8.2	8.5	8.8
	3H	7.7	8.0	8.1	8.4	8.7	7.7	8.0	8.1	8.4	8.7
	4H	7.6	7.9	8.0	8.3	8.7	7.6	7.9	8.0	8.3	8.7
	6H	7.5	7.8	7.9	8.2	8.6	7.5	7.8	7.9	8.2	8.6
	8H	7.5	7.7	7.9	8.1	8.6	7.5	7.7	7.9	8.1	8.6
	12H	7.4	7.7	7.9	8.1	8.5	7.4	7.6	7.9	8.1	8.5
8H	4H	7.5	7.7	7.9	8.1	8.6	7.5	7.7	7.9	8.1	8.6
	6H	7.4	7.6	7.8	8.0	8.5	7.4	7.6	7.8	8.0	8.5
	8H	7.3	7.5	7.8	8.0	8.5	7.3	7.5	7.8	8.0	8.5
	12H	7.3	7.4	7.8	7.9	8.4	7.3	7.4	7.8	7.9	8.4
12H	4H	7.4	7.6	7.9	8.1	8.5	7.4	7.7	7.9	8.1	8.5
	6H	7.3	7.5	7.8	8.0	8.5	7.3	7.5	7.8	8.0	8.5
	8H	7.3	7.4	7.8	7.9	8.4	7.3	7.4	7.8	7.9	8.4
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				