


Last information update: December 2024

Product configuration: EI66

EI66: Spotlight with base - Neutral White Led - integrated electronic control gear - Super Spot optic

**Product code**

EI66: Spotlight with base - Neutral White Led - integrated electronic control gear - Super Spot optic

Technical description

Spotlight designed to use LED lamps and a Super Spot optic. The optical assembly and base is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. 5 mm thick tempered sodium-calcium closing glass. Double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks for rotation on both the vertical axis and horizontal plane. Complete with a monochrome LED circuit and an Opti Beam Lens optic system. The product includes a PG13.5 cable gland. Electronic DALI ballast integrated in product. Option of using optic accessories assembled via an accessory holder frame. All external screws used are made of A2 stainless steel.

Installation

Floor, wall, ceiling or via pole.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

5.5

Mounting

wall arm|ground surface|wall surface|ceiling surface

Wiring

Double PG.

Complies with EN60598-1 and pertinent regulations



IK07

IP66


**Technical data**

Im system:	675	Life Time LED 2:	79,000h - L80 - B10 (Ta 40°C)
W system:	15.6	Lamp code:	LED
Im source:	1250	Number of lamps for optical assembly:	1
W source:	12	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	43.3	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallo temperatura ambiente:	from -20°C to 50°C.
Total light flux at or above an angle of 90° [Lm]:	0	Lifetime of product at ambient operating temperature:	≥ 50.000h Ta=40°C
Light Output Ratio (L.O.R.) [%]:	54	Power factor:	See installation instructions
Beam angle [°]:	4° / 6°	Inrush current:	5 A / 220 µs
CRI (minimum):	80	Maximum number of luminaires of this type per miniatur circuit breaker:	B10A: 81 luminaires B16A: 130 luminaires C10A: 135 luminaires C16A: 221 luminaires
Colour temperature [K]:	4000	Minimum dimming %:	1
MacAdam Step:	2	Control:	DALI-2
Life Time LED 1:	68,000h - L80 - B10 (Ta 25°C)		

Polar

Imax=44483 cd C0-180		Lux					
90°	180°	90°	h	d1	d2	Em	Emax
			15	1.3	1.6	146	198
			30	2.6	3.1	36	49
			45	3.9	4.7	16	22
			60	5.2	6.3	9	12
			α=5° / 6°				

Isolux

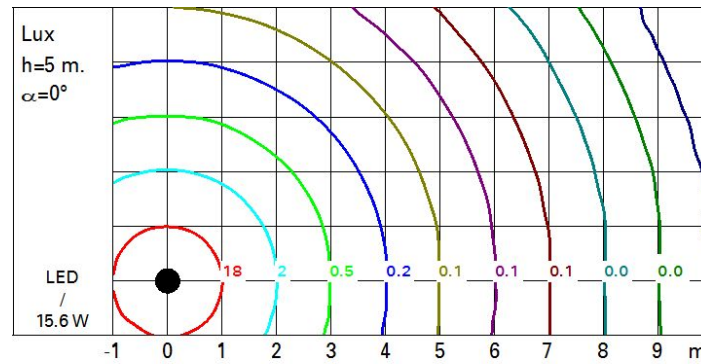

UGR diagram

Corrected UGR values (at 1250 lm bare lamp luminous flux)											
Reflect.:											
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	2.1	4.0	2.4	4.3	4.7	2.0	4.0	2.3	4.3	4.6
	3H	2.4	3.4	2.7	3.7	4.0	2.4	3.4	2.7	3.7	4.0
	4H	2.4	3.1	2.7	3.4	3.7	2.5	3.1	2.8	3.4	3.8
	6H	2.4	2.7	2.7	3.1	3.4	2.5	2.8	2.8	3.1	3.5
	8H	2.2	2.8	2.6	3.2	3.5	2.3	2.9	2.7	3.3	3.6
	12H	2.1	2.9	2.5	3.3	3.6	2.2	3.0	2.6	3.4	3.7
4H	2H	2.5	3.2	2.9	3.5	3.8	2.3	3.0	2.6	3.3	3.6
	3H	2.6	3.4	3.0	3.8	4.2	2.5	3.3	2.9	3.6	4.0
	4H	2.3	3.7	2.8	4.1	4.6	2.3	3.7	2.7	4.1	4.5
	6H	2.0	3.9	2.5	4.4	4.9	2.0	3.9	2.5	4.3	4.8
	8H	1.9	3.9	2.4	4.4	4.9	1.9	3.8	2.4	4.3	4.8
	12H	1.9	3.8	2.4	4.2	4.8	1.8	3.7	2.3	4.2	4.7
8H	4H	2.0	3.9	2.5	4.4	4.9	1.9	3.8	2.4	4.3	4.8
	6H	2.0	3.5	2.5	3.9	4.5	1.9	3.4	2.4	3.9	4.4
	8H	2.1	3.1	2.6	3.6	4.1	2.0	3.0	2.5	3.5	4.0
	12H	2.2	2.7	2.8	3.2	3.7	2.2	2.6	2.7	3.1	3.6
12H	4H	1.9	3.8	2.4	4.3	4.8	1.8	3.7	2.3	4.2	4.7
	6H	2.1	3.1	2.6	3.6	4.1	2.0	3.0	2.5	3.5	4.0
	8H	2.2	2.7	2.8	3.2	3.7	2.2	2.6	2.7	3.1	3.6
Variations with the observer position at spacing:											
S =		1.0H	0.5 / -0.8		0.5 / -0.8						
		1.5H	0.6 / -1.7		0.7 / -1.8						
		2.0H	1.0 / -7.5		1.6 / -7.6						