


Last information update: May 2024

Product configuration: M545+L053

M545: frame 70W HIT

**Product code**M545: frame 70W HIT **Attention! Code no longer in production****Technical description**

Recessed round wall-washer luminaire designed to use a metal halide lamp 70W HIT G8.5. Version with die-cast aluminium rim for surface-mounting. Professional optic for use with a discharge lamp. Die-cast aluminium body. Optical structure consists of high strength thermoplastic circular frame, sandblasted aluminium inner screen, main reflector with visible rim and integrated sector for wall-washer effect made of shiny polished aluminium.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 30 mm.

Colour

White / Aluminium (39)

Mounting

ceiling recessed

Wiring


Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system: 2801.5
 W system: 78
 Im source: 6500
 W source: 70
 Luminous efficiency (Im/W, real value): 35.9
 Im in emergency mode: -
 Total light flux at or above an angle of 90° [Lm]: 0
 Light Output Ratio (L.O.R.) [%]: 43

CRI: 83
 Colour temperature [K]: 3000
 Voltage [Vin]: 230
 Lamp code: L053
 Socket: G8,5
 Number of lamps for optical assembly: 1
 ZVEI Code: HIT-TC-CE
 Number of optical assemblies: 1

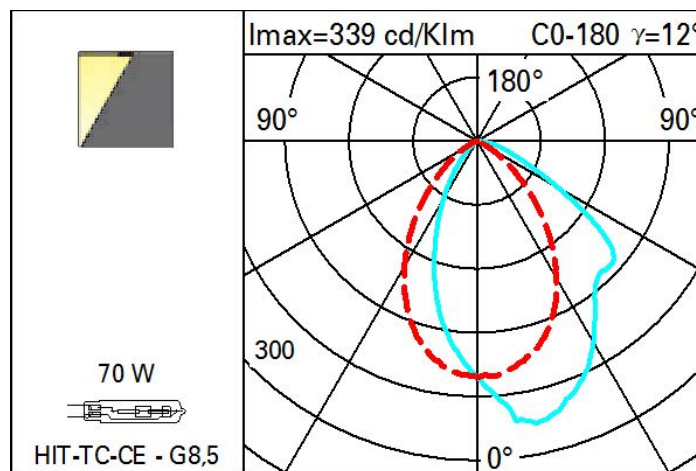Polar

Illuminances

