

## Blade R downlight



Design iGuzzini

iGuzzini

Last information update: January 2025

### Product configuration: QS78

QS78: Minimal Ø 84 - Flood beam - LED

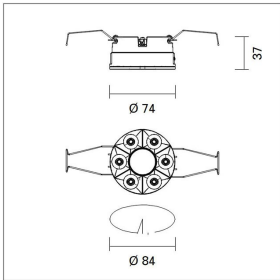

### Product code

QS78: Minimal Ø 84 - Flood beam - LED

### Technical description

Ring luminaire with 6 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Minimal (frameless) version for flush with ceiling installation. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire. Central cover available with separate item code.

### Installation

Recessed with steel wire springs for false ceilings from 12,5 to 25 mm thick - Ø 84 installation hole.

### Colour

White (01) | Black (04) | Gold (14)\* | Burnished chrome (E6)\*

### Weight (Kg)

0.3

\* Colours on request

### Mounting

ceiling recessed


### Wiring

On the power supply unit with terminal board included. Available in DALI electronic versions.

### Notes

Central cover to complete the luminaire to be ordered with a separate item code - available in a standard finish, it is designed to be painted with a customised finish.

Complies with EN60598-1 and pertinent regulations

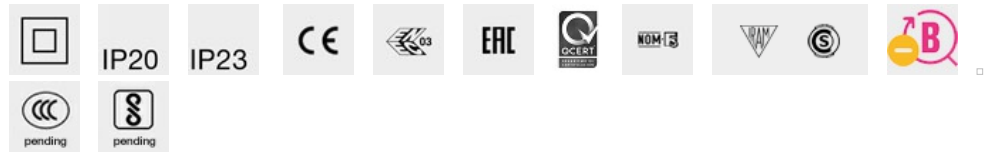

### Technical data

lm system:	872	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	14.5	Voltage [Vin]:	230
lm source:	1050	Lamp code:	LED
W source:	12	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	60.1	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	83	Inrush current:	5 A / 220 µs
Beam angle [°]:	40°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 81 luminaires B16A: 130 luminaires C10A: 135 luminaires C16A: 221 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	2700	Control:	DALI-2
MacAdam Step:	2		


### Polar

Imax=1987 cd		C75-255		CIE		Lux			
90°	180°	90°	0°	nL 0.83	h	d1	d2	Em	Emax
				100-100-100-100-83	2	1.5	1.5	388	496
				UGR <10-<10	4	2.9	2.9	97	124
				DIN A.61	6	4.4	4.4	43	55
				UTE 0.83A+0.00T	8	5.8	5.8	24	31
				F*1=998					
				F*1+F*2=1000					
				F*1+F*2+F*3=1000					
				CIBSE LG3 L<1500 cd/m² at 65°					
				UGR<10   L<1500 cd/mq @65°					
α=40°									

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

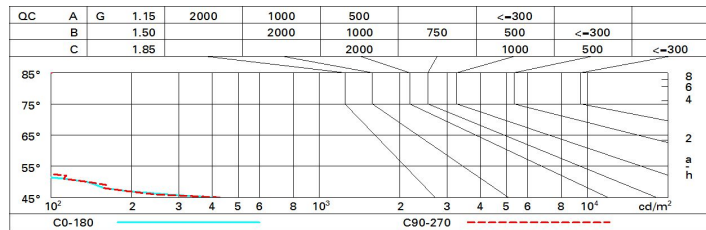

UGR diagram

Corrected UGR values (at 1050 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	3.1	3.7	3.4	3.9	4.2	3.3	3.8	3.5	4.1	4.3
	3H	3.0	3.5	3.3	3.8	4.1	3.1	3.7	3.4	3.9	4.2
	4H	2.9	3.4	3.3	3.7	4.0	3.1	3.5	3.4	3.8	4.1
	6H	2.9	3.3	3.2	3.6	3.9	3.0	3.4	3.3	3.7	4.1
	8H	2.8	3.2	3.2	3.6	3.9	3.0	3.4	3.3	3.7	4.0
	12H	2.8	3.2	3.2	3.5	3.9	2.9	3.3	3.3	3.7	4.0
4H	2H	2.9	3.4	3.3	3.7	4.0	3.1	3.5	3.4	3.8	4.1
	3H	2.8	3.2	3.2	3.5	3.9	2.9	3.3	3.3	3.7	4.0
	4H	2.7	3.1	3.1	3.4	3.8	2.8	3.2	3.2	3.6	3.9
	6H	2.6	2.9	3.0	3.3	3.7	2.7	3.1	3.2	3.4	3.9
	8H	2.6	2.9	3.0	3.3	3.7	2.7	3.0	3.1	3.4	3.8
	12H	2.5	2.8	3.0	3.2	3.7	2.6	2.9	3.1	3.3	3.8
8H	4H	2.6	2.9	3.0	3.3	3.7	2.7	3.0	3.1	3.4	3.8
	6H	2.5	2.7	2.9	3.2	3.6	2.6	2.8	3.1	3.3	3.8
	8H	2.4	2.6	2.9	3.1	3.6	2.5	2.7	3.0	3.2	3.7
	12H	2.4	2.5	2.9	3.0	3.5	2.5	2.7	3.0	3.2	3.7
12H	4H	2.5	2.8	3.0	3.2	3.7	2.6	2.9	3.1	3.3	3.8
	6H	2.4	2.6	2.9	3.1	3.6	2.5	2.7	3.0	3.2	3.7
	8H	2.4	2.5	2.9	3.0	3.5	2.5	2.7	3.0	3.2	3.7
Variations with the observer position at spacing:											
S =	1.0H	6.8 / -19.2					6.9 / -18.9				
	1.5H	9.6 / -20.8					9.7 / -20.2				
	2.0H	11.6 / -21.0					11.7 / -20.4				