

## Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

### Product configuration: Q904.01

Q904.01: LB XS for 48V track - adjustable - HC 2 spotlights - Flood beam - 5.3W 304lm - 2700K - CRI 90 - White



### Product code

Q904.01: LB XS for 48V track - adjustable - HC 2 spotlights - Flood beam - 5.3W 304lm - 2700K - CRI 90 - White

### Technical description

Lighting assembly consisting of two miniaturised adjustable spotlights with adapter for installation on 48V low voltage track. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Despite the ultracompact size of the product, the patented technology of the optic system guarantees efficient luminous flows and a high level of visual comfort. Metallised thermoplastic high definition Opti-Beam reflectors. Extruded aluminium spotlight bodies and die-cast zamak technical dissipation and rotation units. Spotlight swivel movements: 355° rotation and 90° tilt. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

### Installation

Mechanical fastening with adapter on track.

### Colour

White (01)

### Weight (Kg)

0.3

### Mounting

Low voltage track

### Wiring

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.


Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	304	Colour temperature [K]:	2700
W system:	5.3	MacAdam Step:	2
Im source:	190	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	2	Lamp code:	LED
Luminous efficiency (Im/W, real value):	57.4	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	2
Light Output Ratio (L.O.R.) [%]:	80	LED current [mA]:	700
Beam angle [°]:	42°	Power factor:	See installation instructions
CRI (minimum):	90	Minimum dimming %:	5
Rf (Colour Fidelity Index):	92	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Rg (Gamut Index):	102	Control:	DALI

### Polar

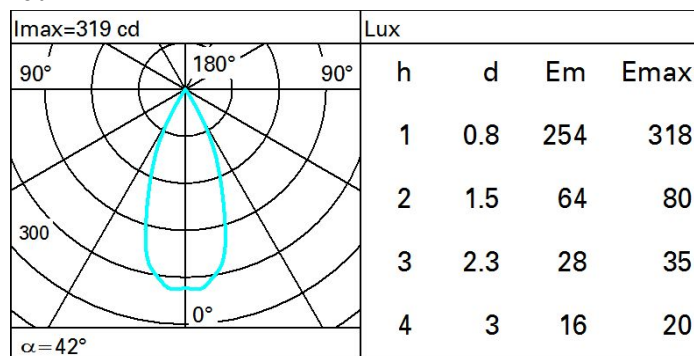

# Isolux

