


# LIGHT UP BALISAGE LED

SPECIFICATION SHEET

PAGE: 1 OF 2

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

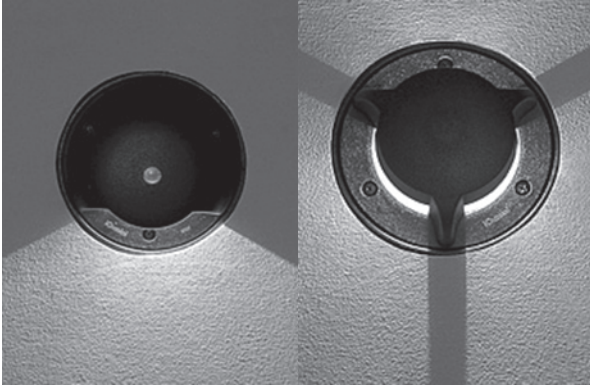

## General information

### Luminaire characteristics:

**Power input:** 4.5W

**Lumens:** 22 lm to 64 lm (delivered)

**Luminaire efficacy:** 5 to 14 lm/W

**Source:** White LED 3000K or 4000K: 80CRI (LM-80 tested).

**Lumen maintenance:** >80% of initial lumens at 50 000 hours (L80)/LM-79 tested.

**Optics:** 1 or 3 windows.

### Materiel:

Body: Die cast aluminum and polished stainless steel hardware.

Front ring: Painted die cast aluminum protective screen.

Diffuser: Colorless tempered glass.

Gasket: EPDM seals.

**Electrical:** High efficiency electronic power supply, rated at 50 000 hours, 120V-277V.

**Mounting:** Inground installation using back box (see accessory).  
Supplied with 36" cabtyre.

Separate waterproof wiring box to be provided by the contractor.  
Provide appropriate drainage below the back box (12" of gravel minimum).

**Finish:** Black.



**Weight:** 1 window: 4.9lbs (2.2kg), 3 windows: 4.1lbs (1.9kg).

**Load capacity:** 5000 Lbs (11000kg)


**Warranty:** 5 year limited warranty.

**Certification:** cULus listed for wet location.

**Ratings:** IP67, IK10.

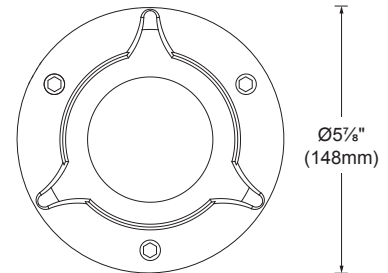

TOP VIEW

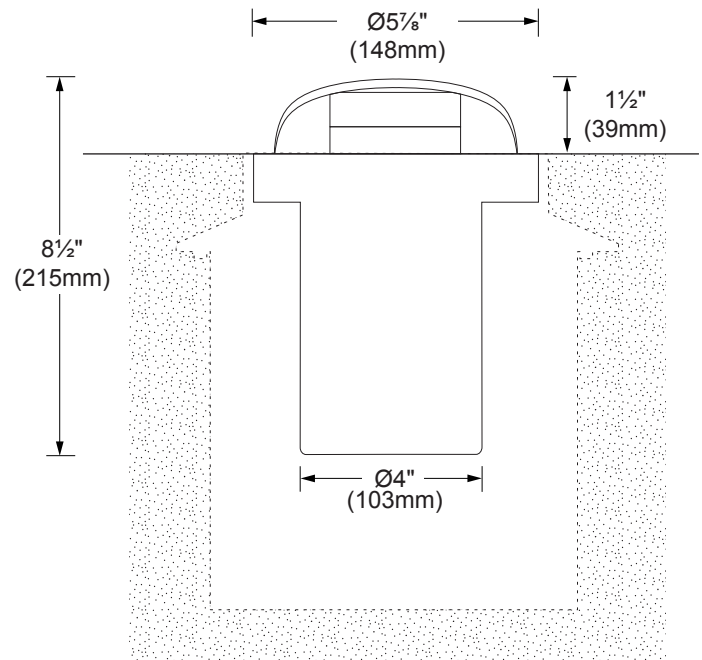

SIDE VIEW

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: DECEMBER 07, 2015

NA - R1

**iGuzzini**  
NORTH AMERICA



9320 Boul. St-Laurent,  
suite 100, Montréal (Québec)  
Canada H2N 1N7  
P.: 514.523.1339 F.: 514.525.6107  
www.sistemalux.com

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

## ACCESSORY (TO BE ORDER SEPARATELY)

- I.5935-02** - Recessed back box made in aluminum and PVC  
Length: Ø10½" x 10¼"  
(Ø265 x 261mm)



## ORDERING INFO

MODEL	VOLTAGE	FINISH
<input type="radio"/> <b>I.BD77</b> - 3000K, 1 window	<input type="radio"/> <b>UNV</b> - 120-277V	<input type="radio"/> <b>02</b> - Black
<input type="radio"/> <b>I.BD78</b> - 3000K, 3 windows		
<input type="radio"/> <b>I.BM38</b> - 4000K, 1 window		
<input type="radio"/> <b>I.BM39</b> - 4000K, 3 windows		

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: DECEMBER 07, 2015

NA - R1