

View Opti Beam Lens square

Design iGuzzini /
Arup

iGuzzini

Last information update: May 2024

Product configuration: Q324

Q324: square small body spotlight - wide flood



Product code

Q324: square small body spotlight - wide flood **Attention! Code no longer in production**

Technical description

Indoor adjustable spotlight with adapter for installation on a three-phase/DALI track. Device made of die-cast aluminium and a front part made of a thermoplastic material. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Optical assembly consisting of Warm White tone 3000K CRI90 LEDs with OPTIBEAM LENS technology and a wide flood light beam. Dimmable driver built-in to box with a semi-hidden system on track. Option of installing a range of flat accessories including an OPTIBEAM REFRACTOR for varying light distribution, an elliptical distribution refractor, a louvre, a soft lens and an outdoor accessory like an asymmetric visor for eliminating stray light dispersion on the ceiling.

Installation

On a three-phase/DALI electrified track

Colour

Black (04) | Black / White (47)

Weight (Kg)

1.13


Mounting

dali track|three circuit track

Wiring

Product complete with dimmable electronic components, housed in a semi-hidden box on the track.

Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1741	CRI (minimum):	90
W system:	21.3	Colour temperature [K]:	3000
Im source:	2100	MacAdam Step:	2
W source:	17	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	81.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	46°	Control:	Push Dim


Polar

<p>Imax=2624 cd 90° 180° 90° 2500 0° α = 46°</p>	CIE nL 0.83 91-98-100-100-83 UGR 18.1-18.0 DIN A.61 UTE 0.83A+0.00T F*1=907 F*1+F*2=977 F*1+F*2+F*3=996	Lux			
		h	d	Em	E _{max}
		2	1.7	507	656
		4	3.4	127	164
		6	5.1	56	73
		8	6.8	32	41

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	63	61	66	63	62	59	72
1.0	75	71	68	65	70	67	67	64	77
1.5	80	77	74	72	76	73	73	70	84
2.0	83	80	78	77	79	77	77	74	89
2.5	85	83	81	80	82	80	79	77	92
3.0	86	84	83	82	83	82	81	79	95
4.0	87	86	85	84	85	84	83	80	97
5.0	88	87	86	86	85	85	83	81	98

Luminance curve limit

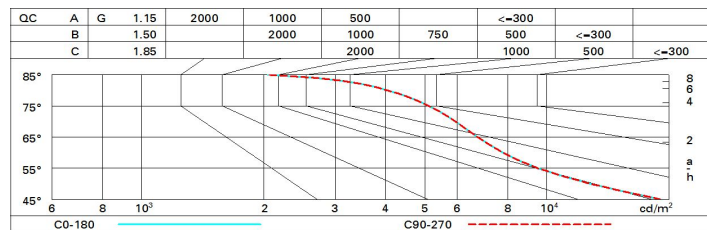

UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.4	18.0	17.7	18.3	18.5	17.4	18.0	17.7	18.3	18.5
	3H	17.7	18.3	18.0	18.5	18.8	17.4	18.0	17.7	18.3	18.6
	4H	17.8	18.3	18.1	18.6	18.9	17.4	18.0	17.8	18.3	18.6
	6H	17.8	18.3	18.2	18.7	19.0	17.4	17.9	17.7	18.2	18.5
	8H	17.8	18.3	18.2	18.7	19.0	17.4	17.8	17.7	18.2	18.5
	12H	17.8	18.3	18.2	18.6	19.0	17.3	17.8	17.7	18.1	18.5
4H	2H	17.4	18.0	17.8	18.3	18.6	17.8	18.3	18.1	18.6	18.9
	3H	17.8	18.3	18.2	18.6	19.0	17.9	18.4	18.3	18.8	19.1
	4H	18.0	18.4	18.4	18.8	19.2	18.0	18.4	18.4	18.8	19.2
	6H	18.1	18.5	18.5	18.9	19.3	18.0	18.4	18.5	18.8	19.2
	8H	18.1	18.5	18.6	18.9	19.3	18.0	18.3	18.5	18.8	19.2
	12H	18.1	18.4	18.6	18.9	19.3	18.0	18.3	18.4	18.7	19.2
8H	4H	18.0	18.3	18.5	18.8	19.2	18.1	18.5	18.6	18.9	19.3
	6H	18.2	18.5	18.7	18.9	19.4	18.2	18.5	18.7	18.9	19.4
	8H	18.2	18.5	18.7	18.9	19.4	18.2	18.5	18.7	18.9	19.4
	12H	18.2	18.4	18.7	18.9	19.4	18.2	18.4	18.7	18.9	19.4
12H	4H	18.0	18.3	18.4	18.7	19.2	18.1	18.4	18.6	18.9	19.3
	6H	18.2	18.4	18.7	18.9	19.4	18.2	18.4	18.7	18.9	19.4
	8H	18.2	18.4	18.7	18.9	19.4	18.2	18.4	18.7	18.9	19.4
Variations with the observer position at spacing:											
S =	1.0H	2.3 / -1.9					2.3 / -1.9				
	1.5H	4.4 / -2.6					4.4 / -2.6				
	2.0H	6.2 / -3.0					6.2 / -3.0				