

LASER BLADE XS (LC)

DOWNLIGHT TRIM / TRIMLESS MODEL: ILBXS01 / 02 / 03 / 04 / 05 / 09 / 10 / 15 - TR / TL - (LC) - NC - REM
WALL WASHER TRIM / TRIMLESS MODEL: ILBXS03 / 05 / 10 / 15 - TR / TL - (LC) - NC - REM



INSTRUCTIONS SHEET

PAGE: 1 of 2

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

NEW CONSTRUCTION PLASTER FRAME INSTALLATION (NC) - TO REMOTE DRIVER (REM)

- A- ENGAGE (4) HANGER BARS IN HOUSING SLOTS AVAILABLE AND CONNECT THEM TOGETHER.
B- FASTEN HANGER BARS TO CEILING BRACE WITH APPROPRIATE #8 SCREWS (**NOT INCLUDED**). HOUSING MUST BE FLUSH WITH CEILING BRACE AND INSURE SMALL FOLDED TAB IS PLACED UNDER CEILING BRACE.
C- INSTALL DRYWALL AND MAKE THE CUT-OUT OPENING (**SEE DIMENSIONS BELOW**).

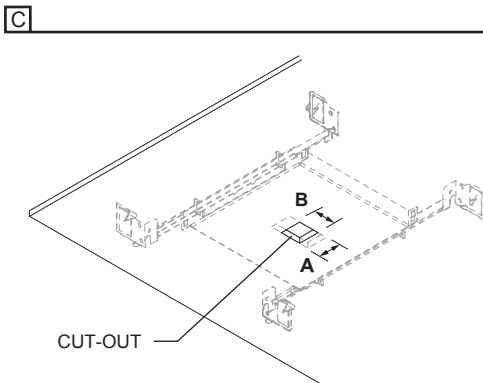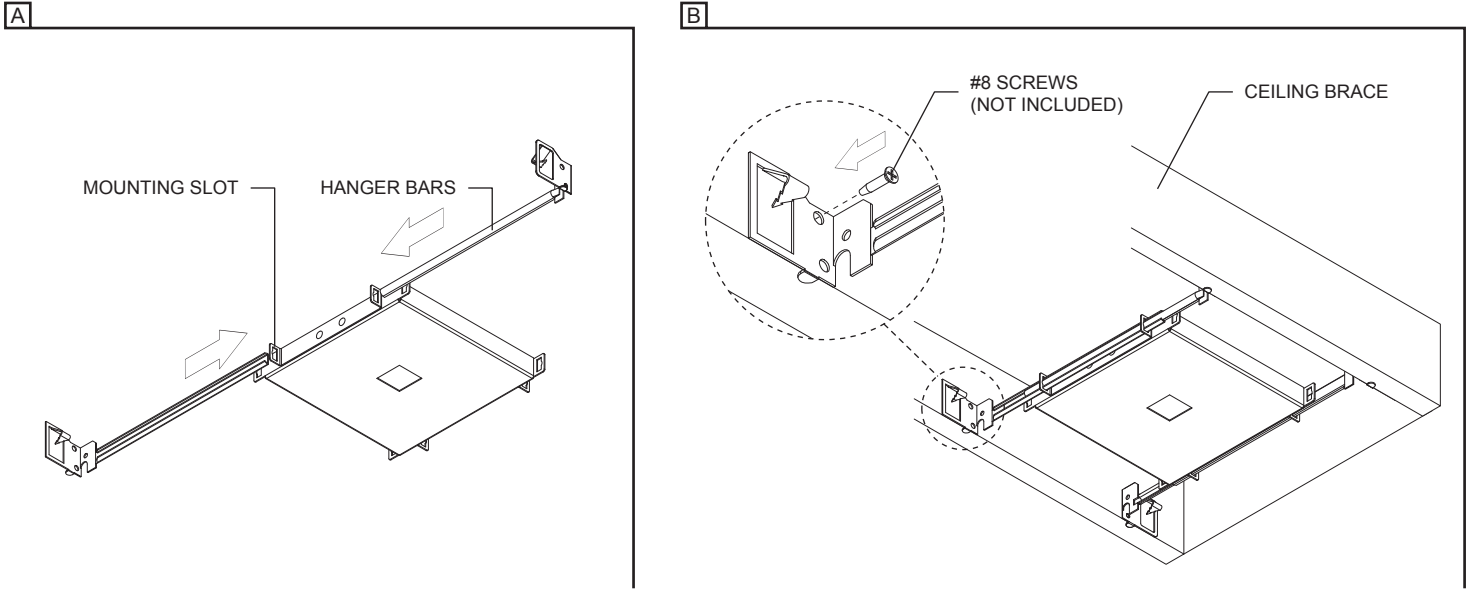

Model	Plaster Frame	Cut-out dimensions (A x B)	Ceiling thickness	Clearance
LBXS01	BN-LBXS01TR-NC	1" x 1" (24 x 24mm)	1/8"-1" (3-25mm)	2" (50mm)
	BN-LBXS01TL-NC	1½" x 1½" (29 x 29mm)	5/8" (16mm)	
LBXS02	BN-LBXS02TR-NC	1" x 1½" (24 x 42mm)	1/8"-1" (3-25mm)	
	BN-LBXS02TL-NC	1½" x 1½" (29 x 41mm)	5/8" (16mm)	
LBXS03	BN-LBXS03TR-NC	1" x 2¾" (24 x 60mm)	1/8"-1" (3-25mm)	
	BN-LBXS03TL-NC	1½" x 2¾" (29 x 60mm)	5/8" (16mm)	
LBXS04	BN-LBXS04TR-NC	1½" x 1½" (42 x 42mm)	1/8"-1" (3-25mm)	
	BN-LBXS04TL-NC	1½" x 1½" (48 x 48mm)	5/8" (16mm)	
LBXS05	BN-LBXS05TR-NC	1" x 3¾" (24 x 95mm)	1/8"-1" (3-25mm)	
	BN-LBXS05TL-NC	1½" x 3¾" (29 x 95mm)	5/8" (16mm)	
LBXS09	BN-LBXS09TR-NC	2¾" x 2¾" (60 x 60mm)	1/8"-1" (3-25mm)	
	BN-LBXS09TL-NC	2¾" x 2¾" (67 x 67mm)	5/8" (16mm)	
LBXS10	BN-LBXS10TR-NC	1" x 7¾" (24 x 186mm)	1/8"-1" (3-25mm)	
	BN-LBXS10TL-NC	1½" x 7¼" (29 x 184mm)	5/8" (16mm)	
LBXS15	BN-LBXS15TR-NC	1" x 10¾" (24 x 276mm)	1/8"-1" (3-25mm)	
	BN-LBXS15TL-NC	1½" x 10¼" (29 x 274mm)	5/8" (16mm)	

LASER BLADE XS (LC)

INSTRUCTIONS SHEET

PAGE: 2 of 2


DOWNLIGHT TRIM / TRIMLESS MODEL: ILBXS01 / 02 / 03 / 04 / 05 / 09 / 10 / 15 - TR / TL - (LC) - NC - REM
WALL WASHER TRIM / TRIMLESS MODEL: ILBXS03 / 05 / 10 / 15 - TR / TL - (LC) - NC - REM

ADDITIONAL STEPS FOR TRIMLESS

D- SCREW IN THE PLASTER FRAME PERFORATED AREA, USING MAXIMUM #8 x 1" (25mm) SCREWS (**NOT INCLUDED**). THE TRIMLESS FRAME MUST PROTRUDE FROM THE CEILING BY 1/16" (1.6mm).

E- FINISH THE ASSEMBLY BY PLASTERING, SANDING AND PAINTING.

D

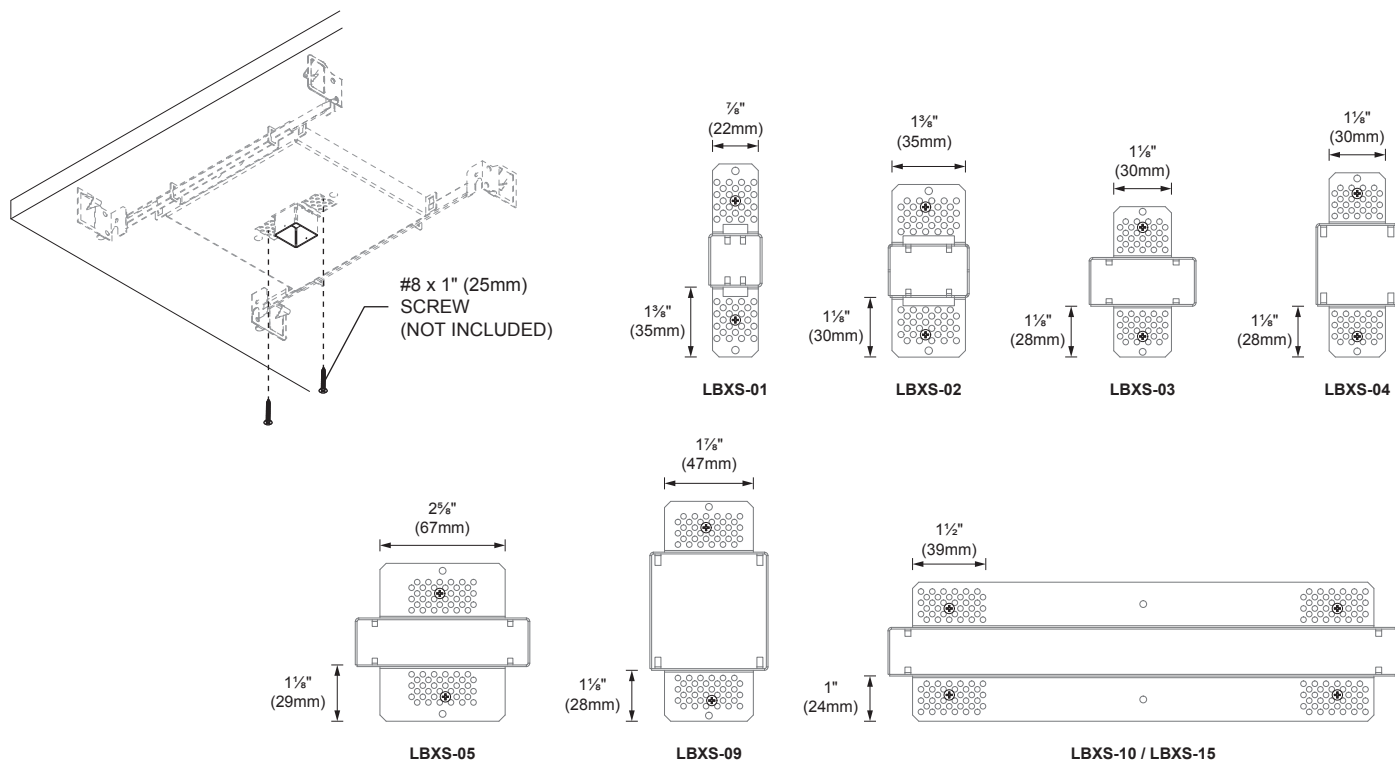

E

