


Last information update: May 2024

Product configuration: MN85+LED

MN85: recessed luminaire Ø 137 - neutral white active dissipation LED - integrated DALI control gear - wide flood

**Product code**MN85: recessed luminaire Ø 137 - neutral white active dissipation LED - integrated DALI control gear - wide flood **Attention! Code no longer in production****Technical description**

recessed adjustable removable luminaire for LED lamp with active heat dissipation system. Structure with die-cast aluminium frame and main body, steel rotation hinge, chrome-plated aluminium body closing ring. Forced heat dissipation using super-silent fan with magnetic anti-friction operation guaranteeing lasting efficiency and quietness, keeping LED lamp performance unchanged. The fan has an anti-dust protection system; safety thermal breaker and is set up for fast, easy replacement. Reflector with high efficiency super-pure aluminium optic - wide flood beam angle. Body adjusted using manually operated device: internal 30° - external 75° - rotation about axis 355°. Supplied with DALI dimmable control gear connected to the luminaire. Neutral white high efficiency LED.

Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 125

Colour

White / Aluminium (39) | Grey/Aluminium (78)

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections


Complies with EN60598-1 and pertinent regulations



IP20

**Technical data**

lm system:	3117,2	CRI:	80
W system:	37	Colour temperature [K]:	4000
lm source:	4000	MacAdam Step:	3
W source:	32	Life Time LED 1:	50.000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	84,2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	78	Number of optical assemblies:	1
Beam angle [°]:	54°	Control:	DALI

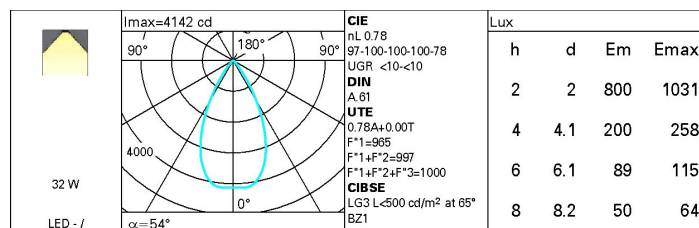Polar

R	77	75	73	71	55	53	33	00	DDR
K0.8	69	65	63	60	65	62	62	59	76
1.0	72	69	66	65	68	66	66	63	81
1.5	76	74	72	70	73	71	70	68	87
2.0	79	77	75	74	76	75	74	71	92
2.5	80	79	78	77	78	77	76	74	95
3.0	81	80	80	79	79	78	77	75	97
4.0	83	82	81	81	80	80	79	77	98
5.0	83	82	82	82	81	81	79	78	99

QC

	A	G	1.15	2000	1000	500	←300		
B			1.50		2000	1000	750	500	←300
C			1.85			2000		1000	500

85°
75°
65°
55°
45°

10⁻² 2 3 4 5 6 8 10⁻¹ 2 4 5 6 8 10⁰ 10¹ 10² 10³ 10⁴

C0-180 C90-270 cd/m²

8 6 4 2 a h

Photometric curve code: Q180000.RV1											
Uncorrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.:											
ceiling	walls	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
work pl.		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Room dim		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
x	y	viewed crosswise					viewed endwise				
2H	2H	9.0	9.0	9.3	9.8	10.1	9.0	9.0	9.2	9.8	10.1
	3H	8.8	9.4	9.2	9.7	9.9	8.8	9.4	9.1	9.7	9.9
	4H	8.8	9.3	9.1	9.6	9.9	8.7	9.3	9.1	9.6	9.9
	6H	8.7	9.2	9.0	9.5	9.8	8.7	9.1	9.0	9.5	9.8
	8H	8.7	9.1	9.0	9.4	9.8	8.6	9.1	9.0	9.4	9.8
	12H	8.6	9.1	9.0	9.4	9.7	8.6	9.0	9.0	9.4	9.7
4H	2H	8.8	9.3	9.1	9.6	9.9	8.7	9.3	9.1	9.6	9.9
	3H	8.6	9.1	9.0	9.4	9.8	8.6	9.0	9.0	9.4	9.7
	4H	8.5	8.9	8.9	9.3	9.7	8.5	8.9	8.9	9.3	9.7
	6H	8.4	8.8	8.9	9.2	9.6	8.4	8.8	8.9	9.2	9.6
	8H	8.4	8.7	8.8	9.1	9.6	8.4	8.7	8.8	9.1	9.5
	12H	8.3	8.6	8.8	9.1	9.5	8.3	8.6	8.8	9.0	9.5
8H	4H	8.4	8.7	8.8	9.1	9.6	8.4	8.7	8.8	9.1	9.5
	6H	8.3	8.6	8.8	9.0	9.5	8.3	8.5	8.8	9.0	9.5
	8H	8.3	8.5	8.7	8.9	9.4	8.2	8.5	8.7	8.9	9.4
	12H	8.2	8.4	8.7	8.9	9.4	8.2	8.4	8.7	8.9	9.4
12H	4H	8.3	8.6	8.8	9.1	9.5	8.3	8.6	8.8	9.0	9.5
	6H	8.3	8.5	8.7	8.9	9.4	8.2	8.5	8.7	8.9	9.4
	8H	8.2	8.4	8.7	8.9	9.4	8.2	8.4	8.7	8.9	9.4

Variations with the observer position at spacing:

S =	1.0H	5.4 / -15.7	5.4 / -15.7
	1.5H	8.2 / -17.2	8.2 / -17.2
	2.0H	10.2 / -19.2	10.2 / -19.2