

Last information update: June 2024

Product configuration: P718

P718: multiple adjustable recessed WW



Product code

P718: multiple adjustable recessed WW

Technical description

Twin-compartment multiple adjustable luminaire designed for housing 2700K Warm White COB LED light sources with high colour rendering, featuring OPTIBEAM LENS technology suitable for narrow and well-defined light cones. Rim made of white-coated die-cast aluminium incorporating a black-coated thermoplastic component for guaranteeing maximum visual comfort and preventing stray light dispersion. Spot optic. Adjustable internally around the horizontal axis by 35° and around the vertical axis by 358°. The optical compartments can be adjusted individually. Passive cooling system, by means of a black-coated heat sink made of extruded aluminium. The power supply unit is available with a separate code.

Installation

Recessed installation in false ceilings with 1 mm to 20 mm thickness with steel springs.

Colour

White (01)


Mounting

ceiling surface

Wiring

Constant-current ballasts available with separate code: ON-OFF / 1-10 V dimmable / phase-cut dimmer / the recessed luminaire is supplied with the cable and connector to be connected to the connector provided on the driver.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	683	CRI (minimum):	90
W system:	12.2	Colour temperature [K]:	2700
lm source:	560	MacAdam Step:	2
W source:	6.1	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	56	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	2
Beam angle [°]:	10°	LED current [mA]:	550

Polar

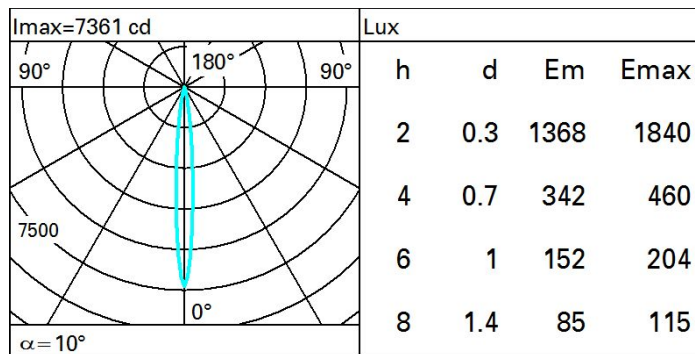

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	55	52	50	49	52	50	50	48	78
1.0	57	55	53	52	54	53	52	50	83
1.5	60	58	57	56	58	56	56	54	89
2.0	62	61	60	59	60	59	58	57	93
2.5	63	62	61	61	61	61	60	58	96
3.0	64	63	63	62	62	62	61	60	98
4.0	65	64	64	64	63	63	62	61	99
5.0	65	65	65	64	64	64	63	61	100

Luminance curve limit

