

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: October 2024

Product configuration: QI62

QI62: Ceiling-mounted linear HC - 5 cells - Flood beam



Product code

QI62: Ceiling-mounted linear HC - 5 cells - Flood beam

Technical description

Ceiling-mounted luminaire with 5 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. Integrated DALI dimmable electronic ballast.

Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

Colour

White (01) | Black / Black (43) | Black / White (47)

Weight (Kg)


0.45

Mounting

ceiling surface

Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.



Complies with EN60598-1 and pertinent regulations




Technical data

| | | | |
|--|------|--|--|
| lm system: | 813 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| W system: | 12.5 | Voltage [Vin]: | 230 |
| lm source: | 980 | Lamp code: | LED |
| W source: | 10 | Number of lamps for optical assembly: | 1 |
| Luminous efficiency (lm/W, real value): | 65.1 | ZVEI Code: | LED |
| lm in emergency mode: | - | Number of optical assemblies: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Power factor: | See installation instructions |
| Light Output Ratio (L.O.R.) [%]: | 83 | Inrush current: | 5 A / 50 µs |
| Beam angle [°]: | 43° | Maximum number of luminaires of this type per miniature circuit breaker: | B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires |
| CRI (minimum): | 90 | Minimum dimming %: | 1 |
| Colour temperature [K]: | 3000 | Overvoltage protection: | 3kV Common mode & 2kV Differential mode |
| MacAdam Step: | 2 | Control: | DALI-2 |

Polar

| Imax=1671 cd | | Lux | | | |
|--------------|------|-----|-----|-----|------------------|
| 90° | 180° | h | d | Em | E _{max} |
| | | 2 | 1.5 | 340 | 415 |
| | | 4 | 3.1 | 85 | 104 |
| | | 6 | 4.6 | 38 | 46 |
| | | 8 | 6.1 | 21 | 26 |

Isolux

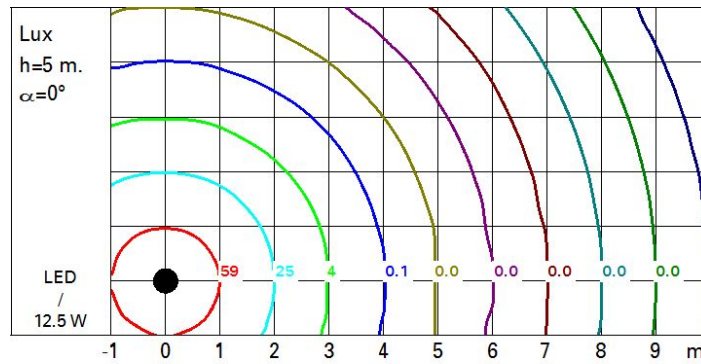

UGR diagram

| Corrected UGR values (at 980 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|------|--------------|------|------|------|------|--------------|------|------|------|------|
| Riflect.: | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| ceiling/cav | | | | | | | | | | | |
| walls | | | | | | | | | | | |
| work pl. | | | | | | | | | | | |
| Room dim | | viewed | | | | | viewed | | | | |
| x | y | crosswise | | | | | endwise | | | | |
| 2H | 2H | 7.5 | 8.0 | 7.8 | 8.2 | 8.4 | 7.5 | 8.0 | 7.8 | 8.2 | 8.4 |
| | 3H | 7.4 | 7.8 | 7.7 | 8.0 | 8.3 | 7.4 | 7.8 | 7.7 | 8.0 | 8.3 |
| | 4H | 7.3 | 7.7 | 7.6 | 8.0 | 8.3 | 7.3 | 7.7 | 7.6 | 8.0 | 8.3 |
| | 6H | 7.2 | 7.6 | 7.6 | 7.9 | 8.2 | 7.2 | 7.6 | 7.5 | 7.9 | 8.2 |
| | 8H | 7.2 | 7.5 | 7.5 | 7.9 | 8.2 | 7.2 | 7.5 | 7.5 | 7.9 | 8.2 |
| | 12H | 7.1 | 7.5 | 7.5 | 7.8 | 8.2 | 7.1 | 7.5 | 7.5 | 7.8 | 8.2 |
| 4H | 2H | 7.3 | 7.7 | 7.6 | 8.0 | 8.3 | 7.3 | 7.7 | 7.6 | 8.0 | 8.3 |
| | 3H | 7.1 | 7.5 | 7.5 | 7.8 | 8.2 | 7.1 | 7.5 | 7.5 | 7.8 | 8.2 |
| | 4H | 7.0 | 7.3 | 7.4 | 7.7 | 8.1 | 7.0 | 7.3 | 7.4 | 7.7 | 8.1 |
| | 6H | 7.0 | 7.2 | 7.4 | 7.6 | 8.0 | 7.0 | 7.2 | 7.4 | 7.6 | 8.0 |
| | 8H | 6.9 | 7.2 | 7.4 | 7.6 | 8.0 | 6.9 | 7.2 | 7.3 | 7.6 | 8.0 |
| | 12H | 6.9 | 7.1 | 7.3 | 7.5 | 8.0 | 6.9 | 7.1 | 7.3 | 7.5 | 8.0 |
| 8H | 4H | 6.9 | 7.2 | 7.3 | 7.6 | 8.0 | 6.9 | 7.2 | 7.4 | 7.6 | 8.0 |
| | 6H | 6.8 | 7.0 | 7.3 | 7.5 | 7.9 | 6.8 | 7.0 | 7.3 | 7.5 | 7.9 |
| | 8H | 6.8 | 6.9 | 7.3 | 7.4 | 7.9 | 6.8 | 6.9 | 7.3 | 7.4 | 7.9 |
| | 12H | 6.7 | 6.9 | 7.2 | 7.4 | 7.9 | 6.7 | 6.9 | 7.2 | 7.4 | 7.9 |
| | 12H | 6.7 | 6.9 | 7.2 | 7.4 | 7.9 | 6.7 | 6.9 | 7.2 | 7.4 | 7.9 |
| 12H | 4H | 6.9 | 7.1 | 7.3 | 7.5 | 8.0 | 6.9 | 7.1 | 7.3 | 7.5 | 8.0 |
| | 6H | 6.8 | 6.9 | 7.2 | 7.4 | 7.9 | 6.8 | 7.0 | 7.3 | 7.4 | 7.9 |
| | 8H | 6.7 | 6.9 | 7.2 | 7.4 | 7.9 | 6.7 | 6.9 | 7.2 | 7.4 | 7.9 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 7.0 / -14.5 | | | | | 7.0 / -14.5 | | | | |
| | 1.5H | 9.8 / -14.7 | | | | | 9.8 / -14.7 | | | | |
| | 2.0H | 11.8 / -14.8 | | | | | 11.8 / -14.8 | | | | |