

Last information update: October 2024

**Product configuration: QE24**

QE24: 10 - cell Recessed luminaire - LED - Neutral white Spot optic



**Product code**

QE24: 10 - cell Recessed luminaire - LED - Neutral white Spot optic

**Technical description**

rectangular miniaturised recessed luminaire with 10 optical elements with LED lamps - fixed optics - flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Neutral white LED.

**Installation**

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 274



**Colour**

White (01) | Black / Black (43) | Black / White (47)

**Mounting**

wall recessed|ceiling recessed

Complies with EN60598-1 and pertinent regulations




On the visible part of the product once installed

**Technical data**

lm system:	1580	CRI (typical):	97
W system:	21	Colour temperature [K]:	3500
lm source:	2000	MacAdam Step:	3
W source:	21	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	75.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	12°	LED current [mA]:	700
CRI (minimum):	95		

**Polar**

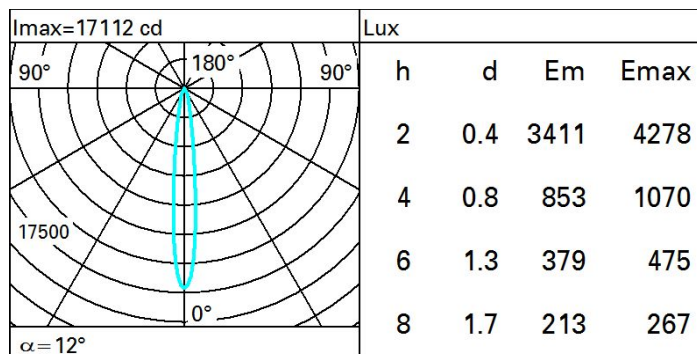

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	68	65	63	67	65	64	62	78
1.0	75	71	69	67	71	68	68	66	83
1.5	78	76	74	72	75	73	72	70	89
2.0	81	79	77	76	78	76	76	73	93
2.5	82	81	80	79	80	79	78	76	96
3.0	83	82	81	81	81	80	79	77	98
4.0	84	83	83	82	82	82	80	79	99
5.0	84	84	84	83	83	82	81	79	100

Luminance curve limit

