


Isolux

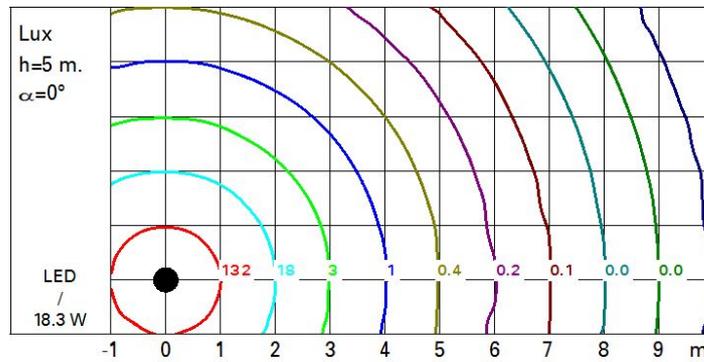

UGR diagram

Corrected UGR values (at 2240 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav											
walls											
work pl.											
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.1	9.1	7.4	9.4	9.7	7.1	9.1	7.4	9.4	9.7
	3H	6.9	8.3	7.3	8.6	8.9	7.0	8.3	7.3	8.6	8.9
	4H	6.9	7.9	7.3	8.3	8.6	6.9	8.0	7.3	8.3	8.6
	6H	6.9	7.6	7.2	7.9	8.3	6.9	7.6	7.3	8.0	8.3
	8H	6.8	7.6	7.2	8.0	8.3	6.8	7.7	7.2	8.0	8.3
	12H	6.7	7.6	7.1	8.0	8.4	6.7	7.7	7.1	8.0	8.4
4H	2H	6.9	8.0	7.3	8.3	8.6	6.9	7.9	7.3	8.3	8.6
	3H	6.8	7.7	7.1	8.0	8.4	6.7	7.7	7.1	8.0	8.4
	4H	6.6	7.7	7.0	8.1	8.5	6.6	7.7	7.0	8.1	8.5
	6H	6.2	7.9	6.7	8.4	8.9	6.2	7.9	6.7	8.4	8.9
	8H	6.1	8.0	6.6	8.4	8.9	6.1	8.0	6.6	8.4	8.9
	12H	6.0	7.9	6.5	8.4	8.9	6.0	7.9	6.5	8.4	8.9
8H	4H	6.1	8.0	6.6	8.4	8.9	6.1	8.0	6.6	8.4	8.9
	6H	6.0	7.7	6.5	8.2	8.7	6.0	7.7	6.5	8.2	8.7
	8H	6.1	7.4	6.6	7.9	8.4	6.1	7.4	6.6	7.9	8.4
	12H	6.2	7.0	6.7	7.5	8.0	6.2	7.0	6.7	7.5	8.0
12H	4H	6.0	7.9	6.5	8.4	8.9	6.0	7.9	6.5	8.4	8.9
	6H	6.1	7.4	6.6	7.9	8.4	6.1	7.4	6.6	7.9	8.4
	8H	6.2	7.0	6.7	7.5	8.0	6.2	7.0	6.7	7.5	8.0
Variations with the observer position at spacing:											
S =	1.0H	3.3 / -7.4				3.3 / -7.4					
	1.5H	5.9 / -14.1				5.9 / -14.1					
	2.0H	7.9 / -23.9				7.9 / -23.9					