

Last information update: April 2025

Product configuration: N107.39

N107.39: adjustable luminaire - Ø 212 mm - warm white - medium optic - frame - 35.6W 3611.5lm - 3000K - White / Aluminium



Product code

N107.39: adjustable luminaire - Ø 212 mm - warm white - medium optic - frame - 35.6W 3611.5lm - 3000K - White / Aluminium

Technical description

Round adjustable luminaire designed to use an LED lamp with C.O.B.technology in a warm white colour tone 3000K. Version with rim for surface-mounting. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick


Colour
White / Aluminium (39)

Weight (Kg)
1.9

Mounting
ceiling recessed

Wiring
Product complete with DALI components


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	3611	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	35.6	Lamp code:	LED
lm source:	5250	Number of lamps for optical assembly:	1
W source:	32	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	101.4	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	18 A / 250 µs
Light Output Ratio (L.O.R.) [%]:	69	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
Beam angle [°]:	18°	Minimum dimming %:	1
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	2		


Polar

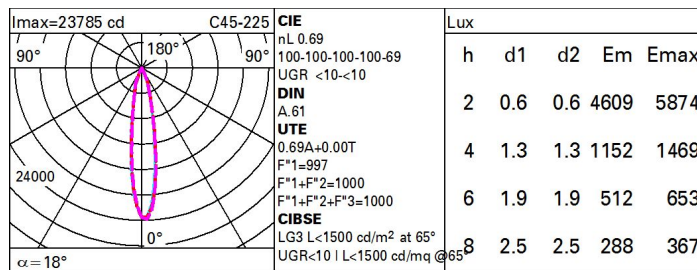

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	62	59	57	55	58	56	56	54	78
1.0	65	62	60	58	61	59	59	57	83
1.5	68	66	64	63	65	64	63	61	89
2.0	70	69	67	66	68	66	66	64	93
2.5	71	70	69	69	69	68	68	66	96
3.0	72	71	71	70	70	70	69	67	98
4.0	73	72	72	72	71	71	70	68	99
5.0	74	73	73	73	72	72	71	69	100

Luminance curve limit

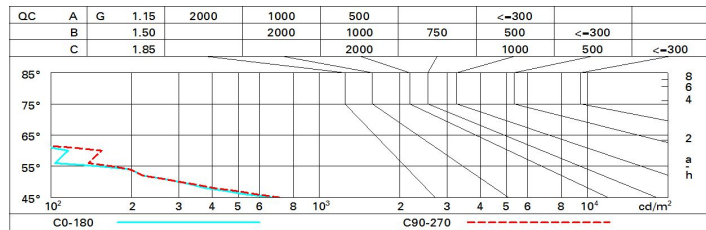

UGR diagram

Corrected UGR values (at 5250 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-4.3	-2.1	-3.9	-1.8	-1.5	-2.7	-0.5	-2.3	-0.2	0.1
	3H	-4.4	-2.8	-4.0	-2.5	-2.1	-2.8	-1.2	-2.4	-0.9	-0.5
	4H	-4.5	-3.2	-4.1	-2.8	-2.5	-2.8	-1.5	-2.5	-1.2	-0.9
	6H	-4.5	-3.5	-4.1	-3.2	-2.8	-2.9	-1.9	-2.5	-1.6	-1.2
	8H	-4.5	-3.6	-4.2	-3.2	-2.9	-2.9	-1.9	-2.5	-1.6	-1.2
	12H	-4.6	-3.6	-4.2	-3.2	-2.9	-3.0	-2.0	-2.6	-1.6	-1.3
4H	2H	-4.5	-3.2	-4.1	-2.8	-2.5	-2.8	-1.5	-2.5	-1.2	-0.9
	3H	-4.6	-3.6	-4.2	-3.2	-2.8	-3.0	-2.0	-2.6	-1.6	-1.2
	4H	-4.7	-3.7	-4.3	-3.3	-2.9	-3.1	-2.1	-2.7	-1.7	-1.3
	6H	-5.1	-3.4	-4.6	-2.9	-2.4	-3.5	-1.7	-3.0	-1.3	-0.8
	8H	-5.2	-3.3	-4.7	-2.8	-2.3	-3.6	-1.7	-3.1	-1.2	-0.7
	12H	-5.3	-3.3	-4.8	-2.9	-2.3	-3.7	-1.7	-3.2	-1.3	-0.7
8H	4H	-5.2	-3.3	-4.7	-2.8	-2.3	-3.6	-1.7	-3.1	-1.2	-0.7
	6H	-5.3	-3.5	-4.8	-3.0	-2.5	-3.7	-1.9	-3.2	-1.4	-0.9
	8H	-5.3	-3.8	-4.8	-3.3	-2.7	-3.7	-2.2	-3.2	-1.7	-1.1
	12H	-5.2	-4.2	-4.7	-3.7	-3.2	-3.6	-2.6	-3.0	-2.1	-1.6
12H	4H	-5.3	-3.3	-4.8	-2.9	-2.3	-3.7	-1.7	-3.2	-1.3	-0.7
	6H	-5.3	-3.8	-4.8	-3.3	-2.7	-3.7	-2.2	-3.2	-1.7	-1.1
	8H	-5.2	-4.2	-4.7	-3.7	-3.2	-3.6	-2.6	-3.0	-2.1	-1.6
Variations with the observer position at spacing:											
S =	1.0H		4.7	/	-12.2				4.6	/	-11.5
	1.5H		7.5	/	-15.8				7.4	/	-15.9
	2.0H		9.5	/	-15.3				9.3	/	-16.8