



Last information update: April 2024

Product configuration: N067

N067: adjustable luminaire - Ø 75 mm - warm white - medium optic - frame

**Product code**

N067: adjustable luminaire - Ø 75 mm - warm white - medium optic - frame

Technical description

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a warm white colour tone 3000K. Version with rim for surface-mounting. Painted, die-cast aluminium body. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

0.45

Mounting

ceiling recessed

Wiring


Product complete with DALI components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	172	MacAdam Step:	2
W system:	10.7	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
lm source:	1150	Lamp code:	LED
W source:	8.3	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	16.1	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	15	Inrush current:	16 A / 220 µs
Beam angle [°]:	19° / 18°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 15 luminaires B16A: 24 luminaires C10A: 24 luminaires C16A: 40 luminaires
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2


Polar

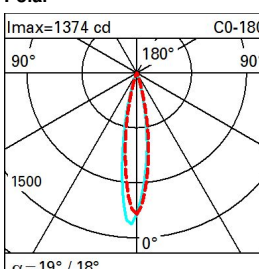 <p>Diagram showing light distribution with beam spread and illuminance contours. The diagram includes a circular grid with angles 90°, 180°, and 0° marked. A red dashed ellipse represents the beam spread, and a blue solid ellipse represents the illuminance contours. The beam spread is labeled with $\alpha = 19^\circ / 18^\circ$. The illuminance contours are labeled with 1500 and 1800. The diagram also shows the beam spread angle $\alpha = 19^\circ / 18^\circ$.</p>	I _{max} =1374 cd		C0-180		CIE nL 0.15 99-100-100-100-15 UGR <10-10					Lux				
					DIN A.61					h				
					UTE 0.15A+0.00T					d1				
					F*1=992					d2				
					F*1+F*2=998					Em				
					F*1+F*2+F*3=999					Emax				
					CIBSE LG3 L<1500 cd/m ² at 65°									
					UGR<10 L<1500 cd/mq @65°									

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	13	13	12	12	13	12	12	12	78
1.0	14	13	13	13	13	13	13	12	82
1.5	15	14	14	14	14	14	14	13	88
2.0	15	15	15	14	15	14	14	14	93
2.5	16	15	15	15	15	15	15	14	95
3.0	16	16	15	15	15	15	15	15	97
4.0	16	16	16	16	15	15	15	15	99
5.0	16	16	16	16	16	16	15	15	100

Luminance curve limit

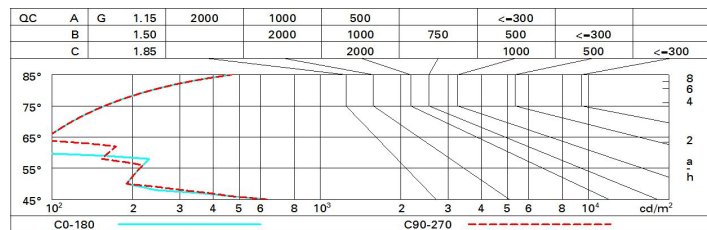

UGR diagram

Corrected UGR values (at 1150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	-1.0	1.0	-0.7	1.3	1.7	4.8	6.9	5.2	7.2	7.5
	3H	-1.1	0.4	-0.7	0.7	1.0	4.7	6.2	5.1	6.5	6.8
	4H	-1.0	0.1	-0.7	0.4	0.8	4.7	5.8	5.0	6.1	6.5
	6H	-0.9	-0.1	-0.5	0.3	0.6	4.6	5.5	5.0	5.8	6.1
	8H	-0.8	0.1	-0.4	0.4	0.8	4.6	5.4	5.0	5.8	6.1
	12H	-0.6	0.3	-0.2	0.7	1.0	4.5	5.4	4.9	5.8	6.1
4H	2H	-1.1	-0.0	-0.8	0.3	0.6	4.7	5.8	5.1	6.1	6.5
	3H	-1.2	-0.3	-0.8	0.1	0.4	4.6	5.5	5.0	5.8	6.2
	4H	-1.2	-0.2	-0.7	0.2	0.6	4.4	5.4	4.9	5.8	6.2
	6H	-1.2	0.5	-0.7	0.9	1.4	4.1	5.7	4.6	6.2	6.6
	8H	-1.0	0.8	-0.6	1.3	1.8	4.0	5.8	4.4	6.3	6.8
	12H	-0.7	1.2	-0.2	1.7	2.2	3.9	5.8	4.4	6.2	6.8
8H	4H	-1.5	0.3	-1.0	0.8	1.3	4.1	5.9	4.5	6.4	6.9
	6H	-1.2	0.5	-0.7	1.0	1.5	4.0	5.7	4.5	6.2	6.7
	8H	-0.7	0.7	-0.2	1.2	1.7	4.1	5.5	4.6	6.0	6.5
	12H	-0.0	1.0	0.5	1.5	2.0	4.2	5.2	4.7	5.7	6.2
12H	4H	-1.6	0.3	-1.1	0.8	1.3	4.1	6.0	4.6	6.4	7.0
	6H	-1.1	0.4	-0.5	0.9	1.4	4.1	5.6	4.7	6.1	6.6
	8H	-0.5	0.5	0.0	1.0	1.5	4.3	5.3	4.8	5.8	6.4
Variations with the observer position at spacing:											
S =	1.0H	3.2 / -2.5					8.1 / -6.6				
	1.5H	5.6 / -2.8					10.8 / -6.8				
	2.0H	7.4 / -3.0					12.8 / -7.1				