iGuzzini

Last information update: April 2024

Product configuration: MC26

MC26: Square recessed luminaire - 226x226 mm H=103 mm - LED warm white - DALI ballast - general light optic with controlled luminance UGR<19



Product code

MC26: Square recessed luminaire - 226x226 mm H=103 mm - LED warm white - DALI ballast - general light optic with controlled luminance UGR<19 Attention! Code no longer in production

Technical description

Recessed fixed square luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 3000 lm DALI LED unit in a warm white tone 3000K and driver separate from the luminaire. Light distribution UGR<19 with controlled luminance.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)


Mounting

ceiling recessed

Wiring

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations



4/ 212x212















Technical data			
Im system:	2789	Colour temperature [K]:	3000
W system:	28.6	MacAdam Step:	3
Im source:	3000	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	24	Lamp code:	LED
Luminous efficiency (lm/W, real value):	97.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	93	Control:	DALI
CRI:	80		


Polar

	Lux				
90° 180° 90° 81-100-100-100-93	h	d1	d2	Em	Emax
UGR 19.2-19.2 DIN A.61 UTE	2	3.1	3.1	335	450
0.93B+0.00T F*1=809	4	6.3	6.3	84	113
F"1+F"2=997 F"1+F"3=1000 CIBSE	6	9.4	9.4	37	50
$\alpha=76^{\circ}$ LG3 L<1500 cd/m ² at 65°	8	12.5	12.5	21	28

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	69	65	61	68	64	64	60	64
1.0	81	75	71	68	74	70	70	66	71
1.5	88	83	80	77	82	79	78	75	80
2.0	92	88	86	84	87	85	84	80	86
2.5	94	91	89	87	90	88	87	84	90
3.0	95	93	91	90	92	90	89	86	92
4.0	97	95	94	92	93	92	91	88	95
5.0	97	96	95	94	94	93	92	89	96

Luminance curve limit

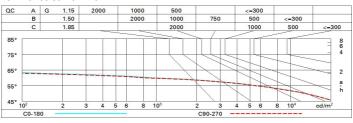

Corre	ected UC	R values	at 300	0 Im bare	e lamp lu	eu oni mu	flux)				
Rifled	ct.:										
ceil/cav walls work pl.		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50 0.20	0.30	0.50	0.30	0.30
				0.20	0.20			0.20		0.20	0.20
Roon	n dim	viewed							viewed		
X	У		crosswis	e	endwise						
2H	2H	19.7	20.5	20.0	20.8	21.0	19.7	20.5	20.0	20.8	21.
	ЗН	19.6	20.3	19.9	20.6	20.9	19.7	20.4	20.0	20.7	20.
	4H	19.5	20.2	19.9	20.5	20.8	19.6	20.3	19.9	20.6	20.
	бН	19.4	20.0	19.8	20.4	20.7	19.5	20.1	19.9	20.4	20.
	HS	19.4	20.0	19.8	20.3	20.6	19.5	20.1	19.9	20.4	20.
	12H	19.4	19.9	19.7	20.2	20.6	19.5	20.0	19.8	20.3	20.
4H	2H	19.6	20.2	19.9	20.5	20.9	19.5	20.2	19.9	20.5	20.
	ЗН	19.4	20.0	19.8	20.3	20.7	19.5	20.0	19.8	20.3	20.
	4H	19.3	19.8	19.8	20.2	20.6	19.4	19.8	19.8	20.2	20.
	бН	19.3	19.7	19.7	20.1	20.5	19.3	19.7	19.7	20.1	20.
	HS	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.7	20.0	20.
	12H	19.2	19.5	19.6	19.9	20.4	19.2	19.5	19.6	20.0	20.
вн	4H	19.2	19.6	19.7	20.0	20.5	19.2	19.6	19.7	20.0	20.
	6H	19.1	19.4	19.6	19.9	20.4	19.1	19.5	19.6	19.9	20.
	HS	19.1	19.3	19.6	19.8	20.3	19.1	19.4	19.6	19.8	20.
	12H	19.0	19.3	19.5	19.7	20.3	19.0	19.3	19.5	19.8	20.
12H	4H	19.2	19.5	19.6	19.9	20.4	19.2	19.5	19.6	20.0	20.
	бН	19.1	19.3	19.6	19.8	20.3	19.1	19.4	19.6	19.8	20.
	HS	19.0	19.3	19.5	19.7	20.3	19.0	19.3	19.5	19.8	20.
Varia	tions wi	th the ob	server p	noitieo	at spacin	g:					
S =	1.0H	2.2 / -5.9					2.2 / -6.0				
	1.5H	3.5 / -25.3					3.6 / -26.5				