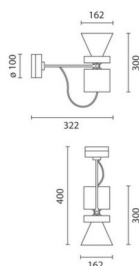


Last information update: May 2024

Product configuration: 4923+L061

4923: Projector complete with electronic control gear 70 W HIT Spot

**Product code**4923: Projector complete with electronic control gear 70 W HIT Spot **Attention! Code no longer in production****Technical description**

Die-cast aluminium and thermoplastic projector. It can be rotated by 340° with respect to the vertical axis and inclined by +/- 100° with respect to the horizontal axis. Mechanical screw-locking devices, graduated scales and adjustable friction devices guarantee the precise positioning of the light beam. The projector is equipped with a die-cast aluminium base for ceiling or wall application. Various accessories are available, such as adjustable flaps, wall-washer screen, UV filter, refractor for the elliptical distribution of the light flow and coloured filters.

Installation

Wall or ceiling.

Colour

White (01) | Black (04) | Grey (15)

Mounting

wall surface|ceiling surface


Wiring

Contained inside the luminaire.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	4004,9	CRI:	92
W system:	78	Colour temperature [K]:	4200
lm source:	6600	Voltage [Vin]:	230
W source:	70	Lamp code:	L061
Luminous efficiency (lm/W, real value):	51,3	Socket:	G12
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	HIT-CE
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1
Beam angle [°]:	18°		

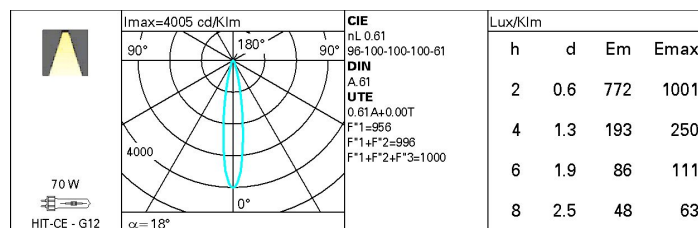Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	51	48	47	50	48	48	46	75
1.0	56	53	51	50	53	51	51	49	80
1.5	59	57	56	54	57	55	55	53	87
2.0	61	60	59	58	59	58	57	55	91
2.5	63	61	60	60	61	60	59	57	94
3.0	63	63	62	61	62	61	60	59	96
4.0	64	63	63	63	62	62	61	60	98
5.0	65	64	64	63	63	63	62	60	99

Luminance curve limit

