

Last information update: April 2024

Product configuration: M441+MM55.01+L044

M441: Minimal version extruded aluminium intermediate/end profile

MM55.01: Folded sheet steel lamp holder plate - White

**Product code**

M441: Minimal version extruded aluminium intermediate/end profile **Attention! Code no longer in production**

Technical description

Minimal version extruded aluminium intermediate/end profile complete with direct joints; methacrylate opal screen set up for connecting several lengths by overlapping; set up for housing 3 wired plates 35/49W T16

Installation

Fitted in continuous rows. Installation can be recessed, wall-mounted, ceiling-mounted and pendant using suitable accessories

Colour

Aluminium (12)

Weight (Kg)

10.38

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

Initial profiles are supplied with 7-pole pass-through wiring for continuous rows. Quick coupling terminal blocks for easier luminaire installation

Notes

Order composition and continuous row configuration can be found in the catalogue. Wiring, plates, end cap sets and fixing accessories must be ordered separately.

Complies with EN60598-1 and pertinent regulations

850°C

**Product code**

MM55.01: Folded sheet steel lamp holder plate - White **Attention! Code no longer in production**

Technical description

Folded sheet steel lamp holder plate with wiring set up for overlapping of 2 T16 tubular lamps.

Colour

Aluminium (12)

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

Electronic control gear set up for emergency light, complete with inverter and rechargeable battery unit. Terminal blocks set up for REST MODE. Permanent emergency light; 1.5 hours autonomy with 12 hour recharging cycle - 3 hours autonomy with 24 hour recharging cycle. Conforms to EN60598-2-22.

Notes

Order composition and continuous row configuration can be found in the catalogue. Wiring, plates, end cap sets and fixing accessories must be ordered separately. For information on wattage of recessed applications please refer to the instructions sheet

Complies with EN60598-1 and pertinent regulations

CE

Technical data

lm system: 1864

W system: 35

lm source: 3300

W source: 35

Luminous efficiency (lm/W, real value): 53.3

lm in emergency mode: -

Total light flux at or above an angle of 90° [Lm]: 0

Light Output Ratio (L.O.R.) [%]: 56

CRI: 86

Colour temperature [K]: 4000

Lamp code: L044


Socket: G5

Number of lamps for optical assembly: 1

ZVEI Code: T 16

Number of optical assemblies: 1

Polar

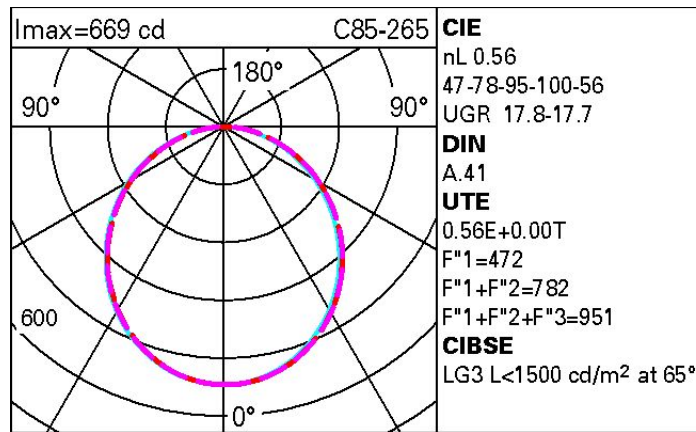

UGR diagram

Corrected UGR values (at 3300 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	13.8	15.0	14.1	15.3	15.5	14.1	15.2	14.4	15.5	15.8
	3H	15.4	16.5	15.7	16.8	17.1	14.6	15.6	14.9	15.9	16.2
	4H	16.0	17.0	16.4	17.3	17.7	14.8	15.8	15.1	16.1	16.4
	6H	16.5	17.4	16.9	17.8	18.1	14.9	15.8	15.2	16.1	16.5
	8H	16.7	17.6	17.1	17.9	18.3	14.9	15.8	15.3	16.1	16.5
	12H	16.8	17.7	17.2	18.0	18.4	14.8	15.7	15.2	16.1	16.4
4H	2H	14.5	15.5	14.9	15.8	16.2	16.4	17.4	16.7	17.7	18.0
	3H	16.3	17.1	16.7	17.5	17.9	17.1	17.9	17.5	18.3	18.7
	4H	17.0	17.8	17.4	18.2	18.6	17.4	18.2	17.8	18.5	18.9
	6H	17.6	18.3	18.1	18.7	19.1	17.6	18.3	18.1	18.7	19.2
	8H	17.8	18.5	18.3	18.9	19.3	17.7	18.3	18.2	18.8	19.2
	12H	18.0	18.6	18.5	19.0	19.5	17.7	18.3	18.2	18.7	19.2
8H	4H	17.3	18.0	17.8	18.4	18.8	18.4	19.0	18.8	19.4	19.9
	6H	18.1	18.6	18.6	19.0	19.5	18.8	19.3	19.3	19.7	20.2
	8H	18.4	18.8	18.9	19.3	19.8	18.9	19.4	19.4	19.9	20.4
	12H	18.6	19.0	19.1	19.5	20.0	19.0	19.4	19.6	19.9	20.5
12H	4H	17.4	17.9	17.8	18.4	18.8	18.6	19.1	19.1	19.6	20.1
	6H	18.1	18.6	18.6	19.1	19.6	19.0	19.5	19.5	20.0	20.5
	8H	18.5	18.9	19.0	19.4	19.9	19.2	19.6	19.8	20.1	20.7
Variations with the observer position at spacing:											
S =		1.0H	0.1 / -0.1		0.1 / -0.1						
		1.5H	0.2 / -0.3		0.2 / -0.3						
		2.0H	0.4 / -0.5		0.3 / -0.5						