


Last information update: May 2024

Product configuration: N260N260: iplan - warm white - UGR<19 L<3,000 cd/m² for $\alpha \geq 65^\circ$ - DALI**Product code**N260: iplan - warm white - UGR<19 L<3,000 cd/m² for $\alpha \geq 65^\circ$ - DALI **Attention! Code no longer in production****Technical description**

Direct and indirect emission pendant luminaire designed to use warm white 3000K high colour rendering LEDs. Extruded anodised aluminium perimeter profile. The down light LEDs are arranged inside the perimeter, while the up light LEDs are positioned in the upper section. The micro-prismatic diffuser screen, combined with an inner screen and diffusing film, allows optimum diffusion of the direct light and controlled luminance UGR<19 L<3,000 cd/m² for $\alpha \geq 65^\circ$. Luminaire set up for simultaneous switch on of both up/down light emission. Product complete with DALI driver, L=1500 mm supporting cables and special power supply base.

Installation

Pendant. System complete with power supply base and L= 1500 mm cables

Colour

Aluminium (12)

Weight (Kg)

10

Mounting

ceiling pendant


Wiring

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**


Im system:	4367	Colour temperature [K]:	3000
W system:	41.3	MacAdam Step:	3
Im source:	6150	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	37	Lamp code:	LED
Luminous efficiency (Im/W, real value):	105.7	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	751	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	71	Control:	DALI
CRI (minimum):	80		

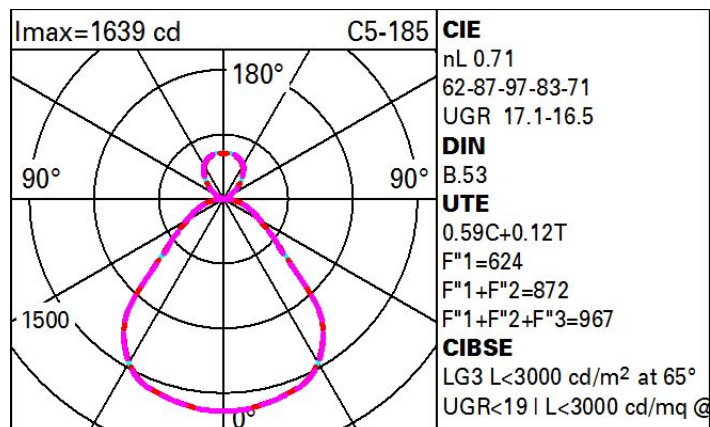Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	48	42	37	34	40	36	34	30	50
1.0	52	46	42	39	44	40	39	34	57
1.5	58	54	50	47	51	48	46	40	68
2.0	62	58	55	53	55	53	50	45	76
2.5	64	61	58	56	58	55	53	47	81
3.0	66	63	61	59	59	58	55	49	84
4.0	67	65	63	62	62	60	57	52	88
5.0	68	67	65	64	63	62	58	53	90

Luminance curve limit

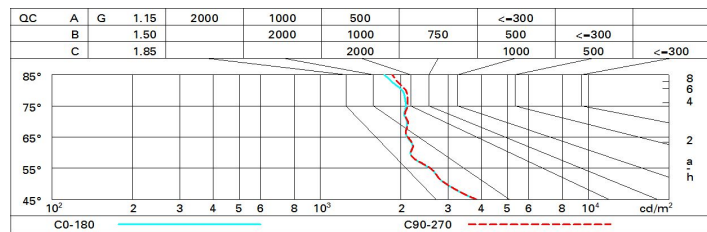

UGR diagram

Corrected UGR values (at 6150 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	14.2	15.0	14.7	15.5	16.1	14.2	15.0	14.7	15.5	16.1
	3H	15.1	15.9	15.7	16.4	17.1	14.4	15.1	14.9	15.7	16.3
	4H	15.6	16.3	16.2	16.9	17.6	14.4	15.1	15.0	15.7	16.4
	6H	16.1	16.7	16.7	17.3	18.0	14.4	15.1	15.1	15.7	16.4
	8H	16.3	16.9	16.9	17.5	18.2	14.4	15.0	15.0	15.6	16.3
	12H	16.4	17.0	17.0	17.6	18.3	14.4	15.0	15.0	15.6	16.3
4H	2H	14.4	15.1	15.0	15.7	16.4	15.7	16.4	16.3	16.9	17.6
	3H	15.6	16.2	16.3	16.8	17.5	16.1	16.7	16.7	17.3	18.0
	4H	16.3	16.8	16.9	17.4	18.2	16.3	16.8	16.9	17.5	18.2
	6H	16.9	17.3	17.6	18.0	18.8	16.5	16.9	17.2	17.6	18.4
	8H	17.1	17.6	17.8	18.2	19.0	16.5	17.0	17.2	17.6	18.4
	12H	17.3	17.7	18.0	18.4	19.2	16.6	16.9	17.3	17.6	18.4
8H	4H	16.5	16.9	17.2	17.6	18.4	17.2	17.6	17.9	18.3	19.1
	6H	17.3	17.7	18.0	18.4	19.2	17.6	17.9	18.3	18.6	19.4
	8H	17.7	18.0	18.4	18.7	19.5	17.7	18.0	18.5	18.8	19.6
	12H	17.9	18.2	18.7	18.9	19.8	17.9	18.1	18.6	18.9	19.7
12H	4H	16.5	16.9	17.2	17.6	18.4	17.4	17.8	18.1	18.5	19.3
	6H	17.4	17.7	18.1	18.4	19.3	17.8	18.1	18.6	18.8	19.7
	8H	17.8	18.1	18.6	18.8	19.7	18.1	18.3	18.8	19.0	19.9
Variations with the observer position at spacing:											
S =	1.0H	0.3 / -0.3					0.3 / -0.3				
	1.5H	0.8 / -0.6					0.7 / -0.6				
	2.0H	1.5 / -0.7					1.4 / -0.7				