

Last information update: March 2025

Product configuration: R617
 R617: Frame recessed luminaire - 10 cells - General Lighting Pro - DALI



Product code
 R617: Frame recessed luminaire - 10 cells - General Lighting Pro - DALI

Technical description
 Rectangular recessed luminaire with 10 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. The total white finish and the patented technology of the optic system guarantee an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic control gear connected to the luminaire.


Installation
 Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 274.

Colour
 White (01) **Weight (Kg)**
 0.65

Mounting
 wall recessed|ceiling recessed

Wiring
 On control gear box with quick-coupling connections.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1575	CRI (typical):	92
W system:	23.2	Colour temperature [K]:	2700
lm source:	2100	MacAdam Step:	3
W source:	20	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	67.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2


Polar

	CIE nL 0.75 88-98-100-100-75 UGR 18.9-18.8 DIN A.61 UTE 0.75A+0.00T F*1=881 F*1+F*2=980 F*1+F*2+F*3=996	Lux <table border="1"> <thead> <tr> <th>h</th> <th>d</th> <th>Em</th> <th>Emax</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>1.8</td> <td>435</td> <td>561</td> </tr> <tr> <td>4</td> <td>3.6</td> <td>109</td> <td>140</td> </tr> <tr> <td>6</td> <td>5.3</td> <td>48</td> <td>62</td> </tr> <tr> <td>8</td> <td>7.1</td> <td>27</td> <td>35</td> </tr> </tbody> </table>	h	d	Em	Emax	2	1.8	435	561	4	3.6	109	140	6	5.3	48	62	8	7.1	27	35
h	d	Em	Emax																			
2	1.8	435	561																			
4	3.6	109	140																			
6	5.3	48	62																			
8	7.1	27	35																			

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	59	56	54	58	56	55	52	70
1.0	67	63	60	58	62	60	59	56	75
1.5	72	69	66	64	68	66	65	62	83
2.0	75	72	70	69	71	70	69	66	88
2.5	76	74	73	72	73	72	71	69	92
3.0	77	76	75	74	75	74	73	71	94
4.0	79	77	77	76	76	75	74	72	96
5.0	79	78	78	77	77	76	75	73	97

Luminance curve limit

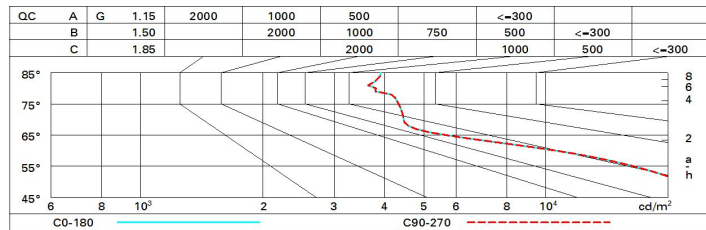

UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	18.7	19.4	19.0	19.6	19.9	18.7	19.4	19.0	19.6	19.9
	3H	18.7	19.3	19.1	19.6	19.9	18.8	19.4	19.1	19.6	19.9
	4H	18.7	19.3	19.1	19.6	19.9	18.7	19.3	19.1	19.6	19.9
	6H	18.7	19.3	19.1	19.6	19.9	18.7	19.2	19.0	19.5	19.8
	8H	18.7	19.3	19.1	19.6	19.9	18.6	19.1	19.0	19.5	19.8
12H	18.7	19.2	19.1	19.6	19.9	18.6	19.1	19.0	19.4	19.8	
4H	2H	18.7	19.3	19.1	19.6	19.9	18.7	19.3	19.1	19.6	19.9
	3H	18.8	19.3	19.2	19.6	20.0	18.8	19.3	19.2	19.7	20.0
	4H	18.8	19.3	19.2	19.6	20.0	18.8	19.3	19.2	19.6	20.0
	6H	18.9	19.2	19.3	19.6	20.1	18.8	19.2	19.2	19.6	20.0
	8H	18.9	19.2	19.3	19.6	20.1	18.8	19.1	19.2	19.5	20.0
12H	18.9	19.2	19.3	19.6	20.1	18.7	19.0	19.2	19.5	19.9	
8H	4H	18.8	19.1	19.2	19.5	20.0	18.9	19.2	19.3	19.6	20.1
	6H	18.9	19.1	19.3	19.6	20.1	18.9	19.2	19.4	19.6	20.1
	8H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.4	19.6	20.1
	12H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.4	19.6	20.1
12H	4H	18.7	19.0	19.2	19.5	19.9	18.9	19.2	19.3	19.6	20.1
	6H	18.8	19.1	19.3	19.5	20.0	18.9	19.1	19.4	19.6	20.1
	8H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.4	19.6	20.1
Variations with the observer position at spacing:											
S =	1.0H	1.4 / -1.5				1.4 / -1.5					
	1.5H	3.1 / -3.7				3.1 / -3.7					
	2.0H	4.8 / -4.9				4.8 / -4.9					