


**Product configuration: MR80**

MR80: Ceiling-mounted luminaire - warm LED - Controlled luminance UGR < 19 - Electronic control gear with inverter



MR80: Ceiling-mounted luminaire - warm LED - Controlled luminance UGR < 19 - Electronic control gear with inverter **Attention!**  
**Code no longer in production**

**Technical description:**  
LED lamp, ceiling-mounted luminaire; integrated electronic control gear, including an inverter and battery unit for permanent emergency light with 1.5 hours autonomy. Die-cast aluminium plate for surface mounting with diffuser element; technical, shaped aluminium sheet brackets for components and optics; comfort reflector vacuum-metallised with aluminium vapours and finished with a protective, anti-scratch layer - controlled luminance optic; safety glass cover over LED lamp; lathe-shaped aluminium cylindrical body; lower ring in high resistance polycarbonate.

Plate fixed to ceiling using screws and screw anchors (not included); bayonet assembly systems ensuring simple installation and maintenance; snap-on spring fastening for reflector. Wall or pendant application option available thanks to special accessory kits with a separate code.

**Colour**  
White (01) | Grey (15)

**Weight (Kg)**  
3.9

mounting  
wall surface|ceiling surface|ceiling pendant

Control gear integrated in luminaire: mains and optic unit connections made with quick coupling terminal blocks.

Kit for wall-mounting: code no. 9443 - kit for steel cable pendant system L 1500: code no. 9442

Complies with EN60598-1 and pertinent regulations



lm system:	1679	Colour temperature [K]:	3000
W system:	15.6	MacAdam Step:	2
lm source:	2000	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	13	Ballast losses [W]:	2.6
Luminous efficiency (lm/W, real value):	107.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	84	Number of optical assemblies:	1
CRI:	80		

**Imax=2046 cd**

**CIE**  
 nL 0.84  
 96-99-100-100-84  
 UGR 13.4-13.2

**DIN**  
 A.61


**UTE**  
 0.84A+0.00T  
 F"1=962  
 F"1+F"2=989  
 F"1+F"2+F"3=996

**CIBSE**  
 LG3 L<1500 cd/m<sup>2</sup> at 65°  
 UGR<16 | L<1500 cd/mq @

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	67	66	63	76
1.0	78	74	71	69	73	71	70	67	80
1.5	82	79	77	75	78	76	75	73	87
2.0	85	83	81	80	82	80	79	77	91
2.5	87	85	84	82	84	82	82	79	94
3.0	88	86	85	85	85	84	83	81	96
4.0	89	88	87	86	86	86	85	82	98
5.0	89	89	88	88	87	87	85	83	99

# Luminance curve limit

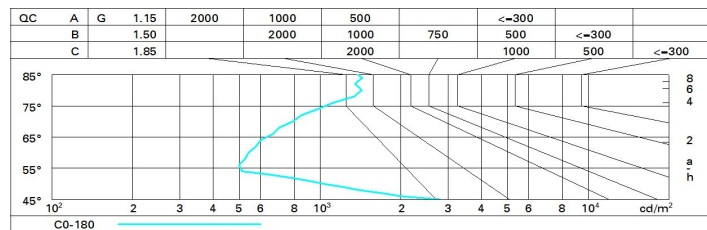

# UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	13.4	14.1	13.7	14.3	14.6	13.4	14.1	13.7	14.3	14.6
	3H	13.4	14.0	13.7	14.2	14.5	13.3	13.9	13.6	14.2	14.5
	4H	13.4	13.9	13.7	14.2	14.5	13.3	13.8	13.6	14.1	14.4
	6H	13.4	13.9	13.8	14.2	14.6	13.2	13.7	13.5	14.0	14.3
	8H	13.5	13.9	13.8	14.3	14.6	13.1	13.6	13.5	14.0	14.3
	12H	13.5	13.9	13.8	14.3	14.6	13.1	13.6	13.5	13.9	14.3
4H	2H	13.3	13.8	13.6	14.1	14.4	13.4	13.9	13.7	14.2	14.5
	3H	13.2	13.7	13.6	14.0	14.4	13.3	13.7	13.6	14.1	14.4
	4H	13.2	13.6	13.6	14.0	14.4	13.2	13.6	13.6	14.0	14.4
	6H	13.4	13.7	13.8	14.1	14.6	13.2	13.6	13.6	14.0	14.4
	8H	13.4	13.8	13.9	14.2	14.6	13.2	13.5	13.6	13.9	14.4
	12H	13.5	13.8	14.0	14.2	14.7	13.2	13.5	13.6	13.9	14.3
8H	4H	13.2	13.5	13.6	13.9	14.4	13.4	13.8	13.9	14.2	14.6
	6H	13.4	13.7	13.9	14.1	14.6	13.5	13.8	14.0	14.2	14.7
	8H	13.5	13.8	14.0	14.2	14.7	13.5	13.8	14.0	14.2	14.7
	12H	13.7	13.9	14.2	14.3	14.9	13.6	13.8	14.1	14.3	14.8
12H	4H	13.2	13.5	13.6	13.9	14.3	13.5	13.8	14.0	14.2	14.7
	6H	13.4	13.7	13.9	14.1	14.6	13.6	13.8	14.1	14.3	14.8
	8H	13.6	13.8	14.1	14.3	14.8	13.7	13.9	14.2	14.3	14.9
Variations with the observer position at spacing:											
S =		1.0H					4.8 / -4.4				
		1.5H					7.5 / -4.6				
		2.0H					9.4 / -4.5				