


Last information update: April 2025

**Product configuration: QG26**

QG26: Ø 163 mm - warm white - DALI



**Product code**

QG26: Ø 163 mm - warm white - DALI

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Wall-washer light emission.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

0.68

**Mounting**

ceiling surface

**Wiring**

product complete with DALI components


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	1701	Colour temperature [K]:	3000
W system:	17	MacAdam Step:	2
lm source:	2100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	15	Lamp code:	LED
Luminous efficiency (lm/W, real value):	100.1	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	81	Control:	DALI-2
CRI (minimum):	90		

Polar

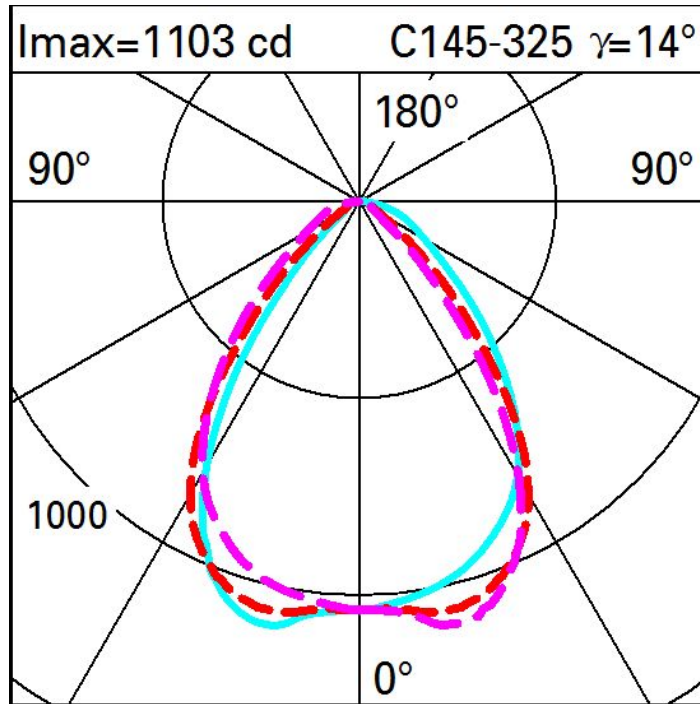

Illuminances

Lux      Wall distance = 1m

3											
	0.9	2	7	23	66	110	66	23	7	2	0.9
2	2	4	11	35	99	153	99	35	11	4	2
	3	6	18	51	99	128	99	51	18	6	3
1	4	10	23	46	71	81	71	46	23	10	4
	6	12	23	35	45	49	45	35	23	12	6
0											
	m	-2	-1	0	1	2	3				