

Last information update: February 2023

Product configuration: B853+1728

B853: Ceiling-mounted fitting complete with pole - H 2230 mm

**Product code**B853: Ceiling-mounted fitting complete with pole - H 2230 mm **Attention! Code no longer in production****Technical description**

Luminaire for diffused lighting, for use with 30W TC-TSE fluorescent lamps and 75W A60 incandescent lamps. Fitting has a component compartment, frame, and diffusing screen. Extruded aluminium pole has an acrylic painting surface treatment that is highly resistant to atmospheric agents. The polycarbonate compartment houses quick-connecting terminals and a PG11 cable clamp. White polycarbonate cover on the terminal blocks. Isolating disk for lamp holder made of black plastic. Transparent silicone gasket. The exterior frame is made of polycarbonate and secured to the body via a bayonet system and a stainless steel sunken hexagonal screw. The diffusing screen is made of moulded polycarbonate printed with an interior texture. All screws are A2 stainless steel.

Installation

Pole.

Colour

Grey (15)

Mounting


ground anchored

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	543	Colour temperature [K]:	2800
W system:	75	Ballast losses [W]:	0
Im source:	950	Voltage [Vin]:	230
W source:	75	Lamp code:	1728
Luminous efficiency (Im/W, real value):	7.2	Socket:	E27
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	33	ZVEI Code:	A 60
Light Output Ratio (L.O.R.) [%]:	57	Number of optical assemblies:	1
CRI:	100	Intervallo temperatura ambiente:	from -20°C to +35°C.

Polar

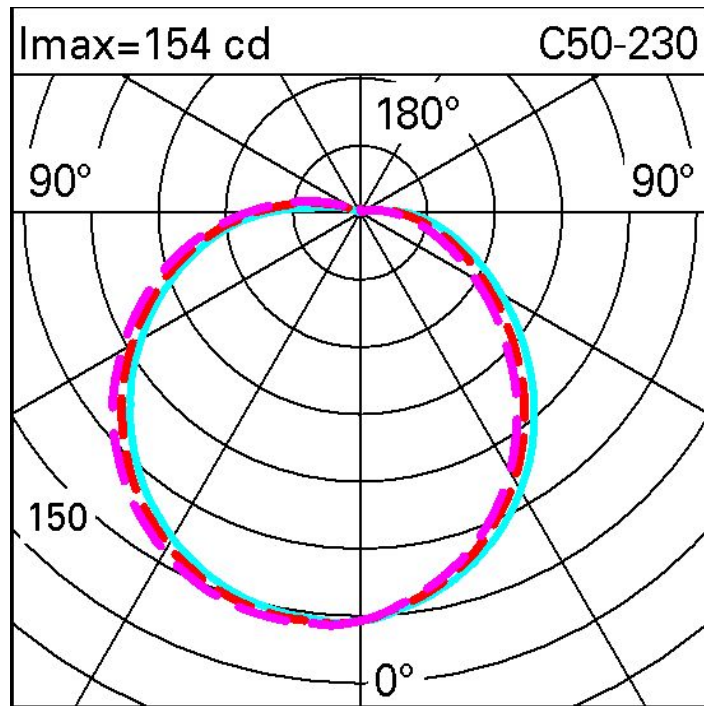

Isolux

