

Project name: _____

Type: _____



Exterior decorative luminaire.

Luminaire characteristics:

Power input: 3.4W

Lumens: 46lm (delivered)

Luminaire efficacy: 13lm/W

Source: White LED, 4000K: 80CRI (LM-80 tested).

Lumen maintenance: >80% of initial lumens at 60 000 hours (L80)

Optics: General lighting.

Mounting: Landscape installation with garden spike.

Material:

Body: UV resistant polycarbonate tubular diffusor with internal PMMA optic

Base: stainless steel

Spike: thermoplastic

Electrical: High efficiency electronic power supply, rated 50 000 H. 120V.


Finish: Stainless steel

Weight: TBC

Warranty: 5 years limited warranty.

Certification: cULus listed.

Ratings: IP67, IK07.

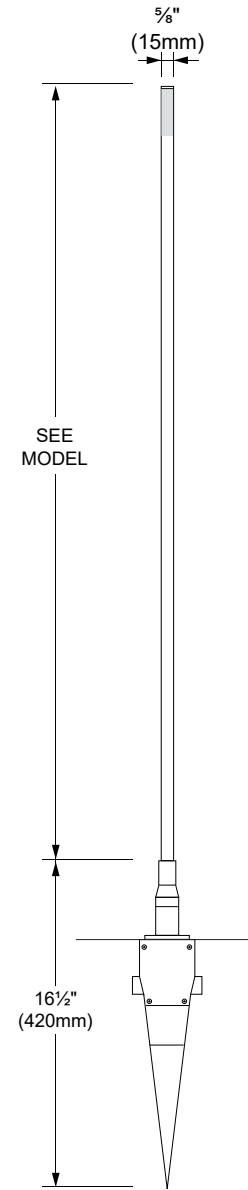

FRONT VIEW

ORDERING INFO

| MODEL | VOLTAGE | FINISH |
|---|---|---|
| <input type="radio"/> IADT0 - 39 ³ / ₈ " (1000mm) <input type="radio"/> IADT1 - 51 ¹ / ₄ " (1300mm) <input type="radio"/> IADT2 - 59" (1500mm) | <input type="radio"/> 120 - 120V | <input type="radio"/> 13 - Stainless steel |

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: NOVEMBER 17, 2015

FB - R1