



## iGuzzini

**Product configuration: Q865**

Q865: LB XS pendant HC - Flood beam - h 300 - integrated driver



## Product code

Q865: LB XS pendant HC - Flood beam - h 300 - integrated driver

### Technical description

Miniaturised pendant luminaire with LED lamp, ideal for zenithal accent lighting. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of visual comfort. Metallised thermoplastic high definition Opti-Beam reflector. Extruded aluminium main body and technical dissipation unit. Thermoplastic ceiling rose with shaped steel fixing plate. PVC power/pendant cable in the same colour as the external finish. The cable connection on the pendant body is fitted with a manual adjustment system that facilitates alignment. ON-OFF driver integrated in luminaire body.

## Installation

Ceiling rose with surface fixing plate (screws and screw anchors not included)

**Colour**

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | Black/gold (44)\* | White / burnished chrome (E7)\* | Black/burnished chrome (F1)\*

\* Colours on request

## Weight (Kg)

0.45

## Mounting

ceiling pendant

## Wiring

Connection terminal included on ceiling plate - the pendant cable can be adjusted on the pendant body


Complies with EN60598-1 and pertinent regulations



## Technical data

Im system:	152	MacAdam Step:	2
W system:	3.8	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Im source:	190	Lamp code:	LED
W source:	2	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	40	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	80	Inrush current:	27 A / 250 µs
Beam angle [°]:	42°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 17 luminaires B16A: 27 luminaires C10A: 28 luminaires C16A: 45 luminaires
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	2700		


## Polar

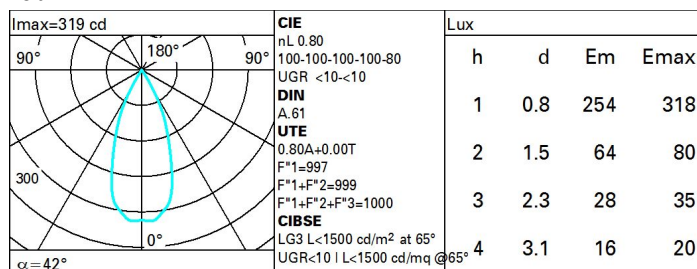

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	82	80	78	77	79	77	76	74	93
2.5	83	82	81	80	81	80	79	77	96
3.0	84	83	82	82	82	81	80	78	98
4.0	85	84	84	83	83	83	81	79	99
5.0	86	85	85	84	84	83	82	80	100

# Luminance curve limit

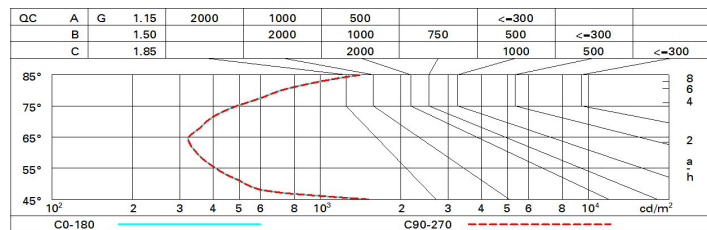

# UGR diagram

Corrected UGR values (at 190 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	8.2	8.8	8.5	9.0	9.2	8.2	8.8	8.5	9.0	9.2
	3H	8.1	8.6	8.4	8.8	9.1	8.1	8.6	8.4	8.8	9.1
	4H	8.0	8.5	8.3	8.8	9.1	8.0	8.5	8.3	8.8	9.1
	6H	7.9	8.4	8.3	8.7	9.0	7.9	8.4	8.3	8.7	9.0
	8H	7.9	8.3	8.3	8.7	9.0	7.9	8.3	8.2	8.6	9.0
	12H	7.9	8.3	8.3	8.7	9.0	7.8	8.2	8.2	8.6	8.9
4H	2H	8.0	8.5	8.3	8.8	9.1	8.0	8.5	8.3	8.8	9.1
	3H	7.8	8.3	8.2	8.6	8.9	7.9	8.3	8.2	8.6	9.0
	4H	7.8	8.1	8.2	8.5	8.9	7.8	8.1	8.2	8.5	8.9
	6H	7.7	8.0	8.1	8.4	8.8	7.7	8.0	8.1	8.4	8.8
	8H	7.7	8.0	8.1	8.4	8.8	7.6	7.9	8.1	8.3	8.8
	12H	7.7	8.0	8.1	8.4	8.8	7.6	7.9	8.1	8.3	8.7
8H	4H	7.6	7.9	8.1	8.3	8.8	7.7	8.0	8.1	8.4	8.8
	6H	7.6	7.8	8.1	8.3	8.8	7.6	7.9	8.1	8.3	8.8
	8H	7.6	7.8	8.1	8.3	8.8	7.6	7.8	8.1	8.3	8.8
	12H	7.6	7.8	8.1	8.3	8.8	7.6	7.7	8.1	8.2	8.7
12H	4H	7.6	7.9	8.1	8.3	8.7	7.7	8.0	8.1	8.4	8.8
	6H	7.6	7.8	8.0	8.2	8.7	7.6	7.8	8.1	8.3	8.8
	8H	7.6	7.7	8.1	8.2	8.7	7.6	7.8	8.1	8.3	8.8
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -8.9					6.7 / -8.9				
	1.5H	9.5 / -9.1					9.5 / -9.1				
	2.0H	11.5 / -9.3					11.5 / -9.3				