

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	58	52	48	56	51	51	46	51
1.0	71	64	59	55	63	58	58	52	58
1.5	80	74	70	66	73	69	68	63	70
2.0	85	80	77	74	79	75	74	70	78
2.5	87	84	81	78	82	79	78	74	83
3.0	89	86	84	81	84	82	81	77	86
4.0	91	89	87	85	87	85	84	80	89
5.0	92	90	89	87	89	87	86	82	91

Courbe limite de luminance

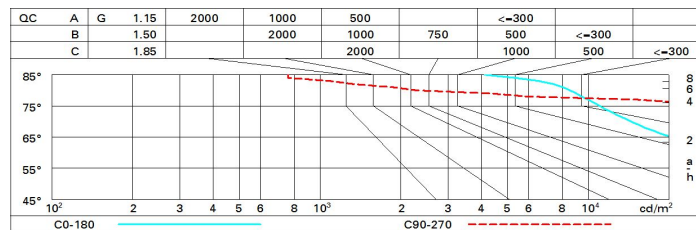


Diagramme UGR

Corrected UGR values (at 1450 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x y											
2H	2H	26.3	27.3	26.6	27.5	27.8	30.6	31.6	30.9	31.8	32.1
	3H	26.3	27.2	26.6	27.4	27.7	30.7	31.5	31.0	31.8	32.1
	4H	26.3	27.1	26.6	27.4	27.7	30.6	31.4	31.0	31.7	32.0
	6H	26.2	26.9	26.6	27.3	27.6	30.5	31.3	30.9	31.6	31.9
	8H	26.2	26.9	26.5	27.2	27.6	30.5	31.2	30.9	31.6	31.9
	12H	26.1	26.8	26.5	27.2	27.5	30.5	31.1	30.9	31.5	31.9
4H	2H	27.0	27.8	27.3	28.1	28.4	31.5	32.3	31.9	32.6	32.9
	3H	27.0	27.7	27.4	28.0	28.4	31.8	32.4	32.1	32.8	33.1
	4H	26.9	27.5	27.4	27.9	28.3	31.8	32.4	32.2	32.7	33.1
	6H	26.9	27.4	27.3	27.8	28.2	31.7	32.3	32.2	32.7	33.1
	8H	26.9	27.3	27.3	27.8	28.2	31.7	32.2	32.1	32.6	33.0
	12H	26.8	27.3	27.3	27.7	28.2	31.7	32.1	32.1	32.5	33.0
8H	4H	27.1	27.6	27.5	28.0	28.4	31.8	32.2	32.2	32.6	33.1
	6H	27.1	27.5	27.5	27.9	28.4	31.8	32.2	32.2	32.6	33.1
	8H	27.0	27.4	27.5	27.8	28.3	31.8	32.1	32.2	32.6	33.1
	12H	27.0	27.3	27.5	27.8	28.3	31.7	32.0	32.2	32.5	33.0
12H	4H	27.1	27.5	27.6	28.0	28.4	31.7	32.1	32.2	32.6	33.0
	6H	27.1	27.4	27.6	27.9	28.4	31.7	32.1	32.2	32.5	33.0
	8H	27.1	27.3	27.6	27.8	28.4	31.7	32.0	32.2	32.5	33.0
Variations with the observer position at spacing:											
S =		1.0H	1.0 / -2.0				0.4 / -0.4				
		1.5H	1.8 / -4.4				0.7 / -1.4				
		2.0H	3.1 / -6.0				1.7 / -1.9				