

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	61	53	47	43	51	46	46	41	47
1.0	67	60	54	50	58	53	53	48	56
1.5	76	70	66	62	69	65	64	59	69
2.0	80	76	72	69	75	71	70	66	77
2.5	83	80	77	74	78	75	74	70	82
3.0	85	82	79	77	80	78	77	73	85
4.0	87	84	83	81	83	81	80	76	89
5.0	88	86	84	83	84	83	81	78	91

Courbe limite de luminance

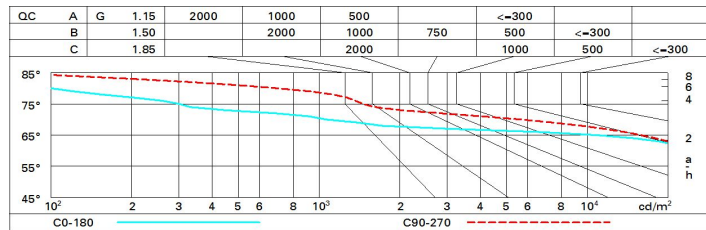


Diagramme UGR

Corrected UGR values (at 3050 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	24.5	25.5	24.8	25.8	26.0	24.8	25.8	25.1	26.0	26.3
	3H	24.5	25.4	24.8	25.7	26.0	25.0	25.9	25.3	26.2	26.5
	4H	24.4	25.3	24.8	25.6	25.9	25.0	25.8	25.3	26.1	26.4
	6H	24.3	25.1	24.7	25.4	25.8	24.9	25.7	25.3	26.0	26.3
	8H	24.3	25.0	24.7	25.4	25.7	24.9	25.6	25.2	25.9	26.3
12H	24.3	25.0	24.7	25.3	25.7	24.8	25.5	25.2	25.9	26.2	
4H	2H	24.7	25.6	25.1	25.9	26.2	24.8	25.6	25.2	26.0	26.3
	3H	24.8	25.5	25.1	25.8	26.2	25.0	25.7	25.4	26.1	26.4
	4H	24.7	25.3	25.1	25.7	26.1	25.0	25.6	25.4	26.0	26.4
	6H	24.6	25.1	25.0	25.5	25.9	24.9	25.5	25.4	25.9	26.3
	8H	24.5	25.0	25.0	25.5	25.9	24.9	25.4	25.3	25.8	26.2
12H	24.5	24.9	25.0	25.4	25.8	24.9	25.3	25.3	25.7	26.2	
8H	4H	24.6	25.0	25.0	25.5	25.9	24.9	25.4	25.3	25.8	26.2
	6H	24.5	24.9	24.9	25.3	25.8	24.8	25.2	25.3	25.7	26.1
	8H	24.4	24.8	24.9	25.2	25.7	24.8	25.1	25.3	25.6	26.1
	12H	24.4	24.7	24.9	25.2	25.7	24.7	25.0	25.2	25.5	26.0
12H	4H	24.5	25.0	25.0	25.4	25.8	24.8	25.3	25.3	25.7	26.2
	6H	24.4	24.8	24.9	25.2	25.7	24.8	25.1	25.3	25.6	26.1
	8H	24.4	24.7	24.9	25.2	25.7	24.7	25.0	25.2	25.5	26.0
Variations with the observer position at spacing:											
S =	1.0H	0.4 / -0.7					0.4 / -0.5				
	1.5H	1.1 / -2.5					1.3 / -2.5				
	2.0H	2.4 / -12.7					2.3 / -6.8				