


Last information update: April 2025

Product configuration: ME78

ME78: iplan - 300 x 1200 mm h 26 mm - neutral white LED- DALI control gear - general light optic

**Product code**

ME78: iplan - 300 x 1200 mm h 26 mm - neutral white LED- DALI control gear - general light optic

Technical description

Direct and indirect emission pendant luminaire designed to use neutral white 4000K high colour rendering LEDs. Extruded anodised aluminium perimeter profile. The down light LEDs are arranged inside the perimeter, while the up light LEDs are positioned in the upper section. The opal diffuser screen, together with an inner screen and diffusing film, allows optimum diffusion of the direct light. Luminaire set up for simultaneous switch on of both up/down light emission. Product complete with DALI driver, L=1500 mm supporting cables and special power supply base.

Installation

Pendant. System complete with power supply base and L= 1500 mm cables

Colour

Aluminium (12)

Weight (Kg)

9.4

Mounting

ceiling pendant


Wiring

product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**


lm system:	4782	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	41.3	Lamp code:	LED
lm source:	6550	Number of lamps for optical assembly:	1
W source:	37	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	115.8	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	874	Inrush current:	30 A / 200 µs
Light Output Ratio (L.O.R.) [%]:	73	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 12 luminaires B16A: 20 luminaires C10A: 20 luminaires C16A: 34 luminaires
CRI (minimum):	80	Minimum dimming %:	1
Colour temperature [K]:	4000	Overvoltage protection:	2kV Common mode & 2kV Differential mode
MacAdam Step:	3	Control:	DALI-2

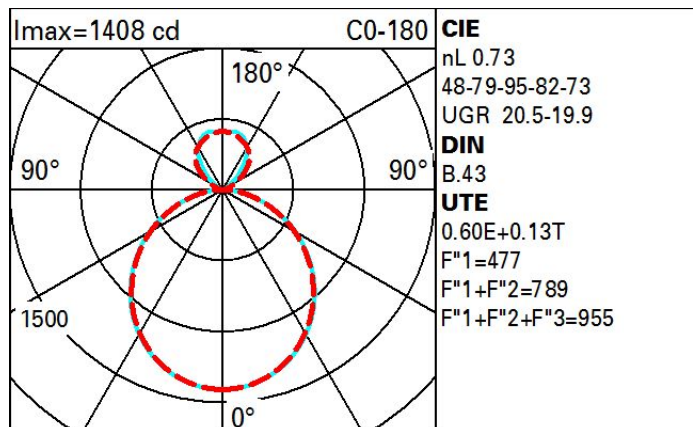Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	45	38	32	29	35	31	29	24	40
1.0	50	43	38	34	40	36	34	28	47
1.5	57	51	47	43	48	44	42	36	60
2.0	61	56	53	49	53	50	47	41	68
2.5	64	60	56	54	56	53	50	44	74
3.0	65	62	59	57	58	56	53	47	78
4.0	68	65	63	60	61	59	56	50	83
5.0	69	67	65	63	63	61	58	51	86

Luminance curve limit

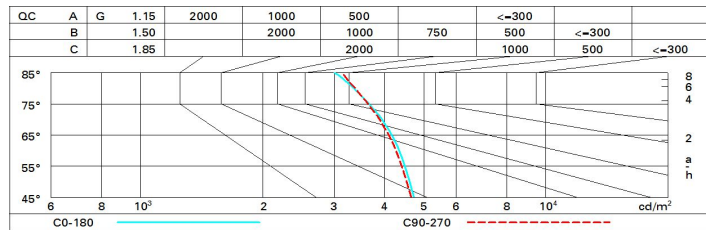

UGR diagram

Corrected UGR values (at 6550 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	10.7	17.6	17.3	18.2	18.8	16.6	17.6	17.2	18.1	18.8
	3H	18.2	19.1	18.8	19.7	20.3	17.1	17.9	17.7	18.5	19.2
	4H	18.8	19.6	19.4	20.2	20.9	17.3	18.0	17.9	18.6	19.3
	6H	19.3	20.0	19.9	20.6	21.3	17.3	18.0	18.0	18.7	19.4
	8H	19.4	20.1	20.1	20.7	21.5	17.3	18.0	18.0	18.6	19.4
12H	19.5	20.2	20.2	20.8	21.6	17.3	17.9	17.9	18.6	19.3	
4H	2H	17.3	18.1	17.9	18.7	19.4	18.7	19.5	19.4	20.1	20.8
	3H	19.0	19.7	19.7	20.3	21.0	19.4	20.0	20.0	20.7	21.4
	4H	19.7	20.3	20.4	21.0	21.7	19.7	20.2	20.3	20.9	21.7
	6H	20.3	20.8	21.0	21.5	22.3	19.9	20.4	20.5	21.0	21.8
	8H	20.5	20.9	21.2	21.6	22.5	19.9	20.4	20.6	21.1	21.9
12H	20.6	21.0	21.3	21.7	22.6	19.9	20.3	20.6	21.0	21.9	
8H	4H	19.9	20.4	20.7	21.1	21.9	20.4	20.9	21.1	21.6	22.4
	6H	20.7	21.0	21.4	21.8	22.6	20.8	21.2	21.5	21.9	22.7
	8H	20.9	21.3	21.7	22.0	22.9	20.9	21.2	21.7	22.0	22.8
	12H	21.1	21.4	21.9	22.2	23.1	21.0	21.3	21.8	22.0	22.9
12H	4H	19.9	20.4	20.7	21.1	21.9	20.6	21.0	21.3	21.7	22.6
	6H	20.7	21.0	21.4	21.8	22.6	21.0	21.3	21.7	22.0	22.9
	8H	21.0	21.3	21.8	22.1	22.9	21.1	21.4	21.9	22.2	23.1
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.3 / -0.3					0.3 / -0.4				
	2.0H	0.4 / -0.5					0.4 / -0.5				