

Mini Reglette


Design iGuzzini

iGuzzini

Last information update: September 2020

Product configuration: 5225+L042

5225: Mini Reglette T16

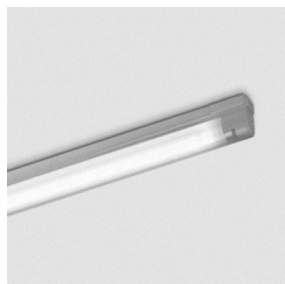

Product code

5225: Mini Reglette T16 **Attention! Code no longer in production**

Technical description

High output luminaire for general lighting designed to use T16 fluorescent lamps. Extruded aluminium component-holding box. Polycarbonate standard protective screen. Joints for direct electric and mechanical connection included with the product. Simplified installation and maintenance. Ceiling/wall mounting kit included with the product. T16 fluorescent lamp included with colour temperature 4000°K.

Installation

Ceiling- and wall-mounted.

Colour

White (01)

Weight (Kg)

0.42

Mounting

wall surface|ceiling surface

Wiring

The luminaire has an electronic ballast


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	2388,1	Colour temperature [K]:	4000
W system:	32	Ballast losses [W]:	4
lm source:	2600	Voltage [Vin]:	230
W source:	28	Lamp code:	L042
Luminous efficiency (lm/W, real value):	74,6	Socket:	G5
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	518,5	ZVEI Code:	T 16
Light Output Ratio (L.O.R.) [%]:	92	Number of optical assemblies:	1
CRI:	86		

Polar

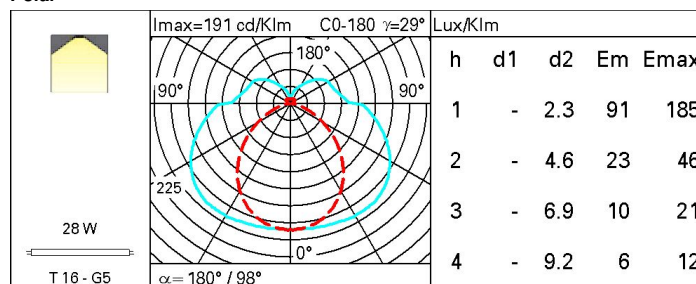

Isolux

