


Last information update: July 2025

**Product configuration: UE65**

UE65: 27 Surface Full Remote - Warm White - 48 Vdc - L=625mm - Wide Flood optic

**Product code**

UE65: 27 Surface Full Remote - Warm White - 48 Vdc - L=625mm - Wide Flood optic

**Technical description**

Direct light linear luminaire, designed to use monochrome LED lamps. The product can be installed using pairs of arms, ceiling/ground/wall-mounting bases, stakes, and pendant rods and cables (to be ordered separately). The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 5mm thick transparent glass screen, fixed with silicone. Complete with Warm White multi-LED circuit. Both the 48Vdc control card (available in a DMX version and a DALI version) and the power supply must be purchased separately. Supplied with a connector with an IP68 threaded locknut. The products have a double connector (male/female) to allow pass-through wiring and continuous line applications. The product is supplied with a closure cover (UV-resistant) that covers the cables and protects against dirt and UV rays. Fitted with an Opti Beam Reflector optical system with a Wide Flood optic. All external screws used are made of A2 stainless steel.

**Installation**

Installation accessories can be purchased separately, including arms for wall installations at a height of less than 3m, arms for wall installations at a height of more than 3m, bases for ceiling or wall-mounted installations, stakes, and pendant rods and cables.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

0.76

**Mounting**

wall arm|wall surface|ceiling surface

**Wiring**

Ceiling, wall, surface, stake and pendant installation.

**Notes**

Supplied with a connector with an IP68 threaded locknut. The products have a double connector (male/female) to allow pass-through wiring and continuous line applications. Both the control card and power supply are remote and must be purchased separately.

Complies with EN60598-1 and pertinent regulations




IK06

IP66

**Technical data**

Im system:	777	MacAdam Step:	3
W system:	7.7	Life Time LED 1:	100,000h - L85 - B10 (Ta 25°C)
Im source:	1110	Life Time LED 2:	100,000h - L85 - B10 (Ta 40°C)
W source:	6	Voltage [Vin]:	48
Luminous efficiency (Im/W, real value):	100.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	70	Number of optical assemblies:	1
Beam angle [°]:	56° / 58°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	LED current [mA]:	40
Colour temperature [K]:	2700	Control:	PWM


**Polar**

max=1047 cd		C5-185		CIE		Lux				
		180°		nL 0.70						
90°		90°		99-100-100-100-70		h d1 d2 Em Emax				
				UGR <10-10		1 1.1 1.1 814 1046				
				DIN						
				A.61						
				UTE						
				0.70A+0.00T						
				F*1=990						
				F*1+F*2=998						
				F*1+F*2+F*3=1000						
				CIBSE						
				LG3 L<1500 cd/m² at 65°						
				UGR<10   L<1500 cd/mq @65°		4 4.2 4.4 51 65				
α=56° / 58°		0°								

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	63	60	57	56	59	57	57	54	78
1.0	66	63	61	59	62	60	60	58	82
1.5	69	67	65	64	66	64	64	62	88
2.0	71	70	68	67	69	67	67	65	93
2.5	73	71	70	70	70	69	69	67	95
3.0	73	73	72	71	71	71	70	68	97
4.0	74	74	73	73	73	72	71	69	99
5.0	75	74	74	74	73	73	72	70	100

# Luminance curve limit

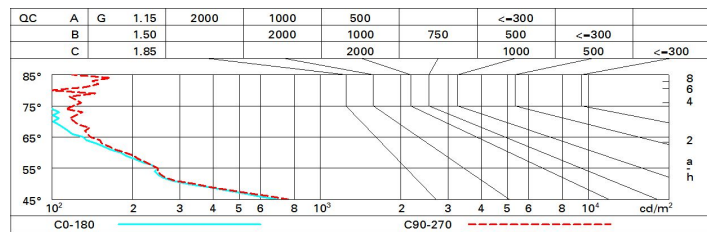

# UGR diagram

Corrected UGR values (at 1110 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	5.4	5.9	5.7	6.1	6.3	6.7	7.1	6.9	7.3	7.6
	3H	5.3	5.7	5.6	6.0	6.3	6.5	6.9	6.8	7.2	7.5
	4H	5.3	5.6	5.6	5.9	6.2	6.5	6.8	6.8	7.1	7.4
	6H	5.2	5.5	5.5	5.8	6.2	6.4	6.7	6.7	7.0	7.4
	8H	5.2	5.5	5.5	5.8	6.1	6.4	6.7	6.7	7.0	7.3
	12H	5.1	5.4	5.5	5.8	6.1	6.3	6.6	6.7	7.0	7.3
4H	2H	5.2	5.6	5.6	5.9	6.2	6.5	6.9	6.8	7.1	7.4
	3H	5.1	5.4	5.5	5.8	6.1	6.3	6.7	6.7	7.0	7.4
	4H	5.0	5.3	5.4	5.7	6.1	6.3	6.5	6.7	6.9	7.3
	6H	5.0	5.2	5.4	5.6	6.0	6.2	6.4	6.6	6.8	7.2
	8H	4.9	5.2	5.4	5.6	6.0	6.1	6.4	6.6	6.8	7.2
	12H	4.9	5.1	5.3	5.5	6.0	6.1	6.3	6.5	6.7	7.2
8H	4H	4.9	5.1	5.3	5.6	6.0	6.2	6.4	6.6	6.8	7.2
	6H	4.8	5.0	5.3	5.5	5.9	6.1	6.3	6.5	6.7	7.2
	8H	4.8	4.9	5.3	5.4	5.9	6.0	6.2	6.5	6.6	7.1
	12H	4.7	4.9	5.2	5.4	5.9	6.0	6.1	6.5	6.6	7.1
12H	4H	4.9	5.1	5.3	5.5	6.0	6.1	6.3	6.6	6.7	7.2
	6H	4.8	4.9	5.3	5.4	5.9	6.0	6.2	6.5	6.6	7.1
	8H	4.7	4.9	5.2	5.4	5.9	6.0	6.1	6.5	6.6	7.1
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -10.4						6.6 / -10.7			
	1.5H	9.3 / -11.4						9.4 / -11.7			
	2.0H	11.2 / -12.1						11.4 / -12.2			